



intertraco (italia)



-  QUICK DISCONNECT COUPLINGS - *INNESTI RAPIDI*
-  SWIVEL JOINTS - *GIUNTI GIREVOLI*
-  IN-LINE VALVES - *VALVOLE IN LINEA*





Intertraco is a fully integrated manufacturer of hydraulic hose fittings, quick disconnect couplings and hydraulic valves. Our broad range of components has been designed and is constantly developed to service the most diversified customer's needs in hydraulic, chemical, off-shore, agricultural and industrial applications.

The market scope, experience and distribution of our products make them the right choice in today's demanding market. The subject brochure presents our range of quick disconnect couplings, swivel joints and in-line valves.

The catalogue is designed for our customers as a working tool to assist them in choosing and selecting the correct product for their specific application.

If there are applications outside of the standard range, we can work jointly with our customers to develop and manufacture specific products to meet their requirements.

Intertraco è una moderna e dinamica azienda, specializzata nella realizzazione di una linea altamente integrata di raccorderie per alta pressione, innesti rapidi e valvole oleodinamiche.

L'ampia ed articolata gamma prodotti è stata sviluppata per soddisfare le più diversificate applicazioni nei settori oleodinamico, industriale, agricolo, chimico ed off-shore. Questo catalogo presenta la nostra produzione standard di innesti rapidi, giunti girevoli e valvole.

Scopo di questa pubblicazione è essere strumento per il cliente nello scegliere il prodotto più adatto alla sua specifica esigenza.

In piena collaborazione con i nostri clienti possiamo sviluppare prodotti specifici per applicazioni speciali.

The high quality level of our products has always been a distinct element of Intertraco. To achieve this result we always adopt the most accurate and innovative solutions in design, testing and manufacturing. Yet, our real company focus is on our customers and on the market. The main target at Intertraco is to develop and maintain very open and strong relations with our customer base. In this way, we are always able to define exactly our customers' exact requirements and, as a consequence, provide the most reliable and suitable products to fit the final applications.




L'alto livello qualitativo dei nostri prodotti è da sempre un nostro elemento qualificante e distintivo; per conseguire questo risultato perseguiamo ed utilizziamo le più sofisticate e moderne tecnologie di progettazione e produttive. Da sempre tuttavia sono i clienti e il mercato al centro della nostra missione aziendale. Obiettivo prioritario di Intertraco è quello di sviluppare rapporti forti e trasparenti con i clienti. Questo approccio ci permette di conoscere in modo chiaro e preciso le loro esigenze e, conseguentemente, possiamo sviluppare e costruire i prodotti che con assoluta affidabilità si adattano alle applicazioni finali.



**QUALITY
AND SERVICE**

**QUALITA'
E SERVIZIO**

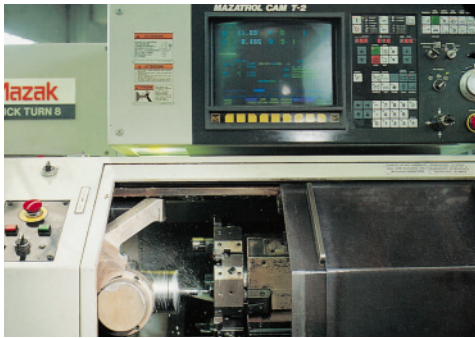

Our effective company organization and flexible manufacturing provide to our customers reliable products on time. Stock availability, accurate and strong packing and our partnership with effective and quick forwarding agents ensure a high and consistent level of service. Quality service, on time deliveries and the ability to work on a scheduled basis with O.E.M. customers are key points of our success on both our domestic and export markets.



Grazie ad un'efficace organizzazione aziendale e ad una elevata flessibilità produttiva, Intertraco garantisce alla propria clientela prodotti affidabili, innovativi e durevoli nel tempo. Disponibilità di prodotti in stock, imballi accurati e robusti, spedizioni veloci con vettori efficienti completano la capacità dell'azienda di offrire al mercato un elevato servizio. Qualità del servizio, puntualità nelle consegne e capacità di lavorare a programma hanno permesso l'affermarsi del nostro marchio sui principali mercati internazionali.

The quick disconnect coupling range
La gamma innesti

pag. 6

How to select the right series
Come identificare la serie giusta

pag. 7

How to order the couplings
Come ordinare gli innesti

pag. 8-9

QUICK DISCONNECT COUPLINGS INNESTI RAPIDI



SERIES - SERIE	A	pag. 10 -11
SERIES - SERIE	B	pag. 12 -13
SERIES - SERIE	N	pag. 14 -15
SERIES - SERIE	P push-pull	pag. 16 -19
SERIES - SERIE	E	pag. 20 -21
SERIES - SERIE	S	pag. 22 -23
SERIES - SERIE	J	pag. 24
SERIES - SERIE	PW	pag. 25

FLAT FACE COUPLINGS INNESTI RAPIDI A FACCE PIANE



SERIES - SERIE	F	pag. 26 -27
SERIES - SERIE	FA -FPM	pag. 28 -29
SERIES - SERIE	HP	pag. 30 -31
SERIES - SERIE	VP	pag. 32 -33

CORROSIVE ENVIRONMENT COUPLINGS

INNESTI RAPIDI PER AMBIENTI CORROSIVI



SERIES - SERIE	X	pag. 34 -35
SERIES - SERIE	R	pag. 36 -37
SERIES - SERIE	Z	pag. 38 -39
SERIES - SERIE	Q	pag. 40 -41
SERIES - SERIE	M	pag. 42 -43

SWIVEL JOINTS GIUNTI GIREVOLI

SERIES - SERIE	SJ 10	pag. 44
SERIES - SERIE	SJ 90	pag. 45

HYDRAULIC VALVES VALVOLE IN LINEA

SERIES - SERIE	CV - VPCC - CVP	pag. 46
SERIES - SERIE	DPC	pag. 47
SERIES - SERIE	VSU - VRX FLOW	pag. 48
SERIES - SERIE	VRU - VRB	pag. 49

The following table indicates the standard series which are included in our  quick disconnect coupling range. The table offers a short guide to each series main features in terms of available sizes, materials, design and possible working conditions. For detailed information on each series, please refer to the following pages of this catalogue.

La seguente tabella mostra le varie serie di innesti rapidi standard che compongono la gamma  e sintetizza le loro caratteristiche di massima in termini di misure, materiali, design ed applicazione. Per ulteriori informazioni rimandiamo alle pagine successive dove ciascuna serie viene trattata in modo più dettagliato.

page pag.	our serie nostra serie	sizes misure	interchange intercambiabilità	material materiale	valve design tipo di valvola	ritention bloccaggio	* working pressure range pressione di esercizio	* temperature range temperatura di esercizio	* environment ambiente
10	A	1/4" - 2"	iso 7241-a	steel acciaio	poppet funghetto	ball locking sfere radiali	0-250 bar	-20/+110°C	est.+interno ext. + indoor
12	B	1/8" - 1"	iso 7241-b	steel acciaio	poppet funghetto	ball locking sfere radiali	0-250 bar	-20/+110°C	est.+interno
14	N	1/4" - 1"	-	steel acciaio	poppet or ball funghetto o sfera	ball locking sfere radiali	0-250 bar	-20/+110°C	est.+interno ext. + indoor
16	P	1/2"	iso 7241- a	steel acciaio	poppet or ball funghetto o sfera	ball locking sfere radiali	0-250 bar	-20/+110°C	est.+interno ext. + indoor
20	E	1 1/4" - 3"	our design ns.design	steel acciaio	poppet funghetto	ball locking sfere radiali	0-120 bar	-20/+110°C	est.+interno ext. + indoor
22	S	1/4" - 2 1/2"	our design ns.design	steel acciaio	poppet funghetto	screw to connect a vite	0-400 bar	-20/+110°C	est.+interno ext. + indoor
24	J	1/4" - 3/8"	-	steel acciaio	ball sfera	screw to connect a vite	0-700 bar	-20/+110°C	est.+interno ext. + indoor
25	PW	3/8"	-	steel+brass acciaio+ottone	free flow passaggio libero	ball locking sfere radiali	0-250 bar	-15/+150°C	est.+interno ext. + indoor
26	F	1/4" - 2"	htma (3/8)	steel acciaio	flat face faccia piana	ball locking sfere radiali	0-250 bar	-20/+110°C	est.+interno ext. + indoor
28	FA	1/8" - 1 1/2"	htma (3/8)	steel acciaio	flat face faccia piana	ball locking sfere radiali	0-350 bar	-20/+110°C	est.+interno ext. + indoor
28	FP	1/4" - 1"	htma (3/8)	steel acciaio	flat face faccia piana	ball locking sfere radiali	0-350 bar	-20/+100°C	est.+interno ext. + indoor
30	HP	1/4" - 1/2"	-	steel acciaio	flat face faccia piana	ball locking sfere radiali	0-720 bar	-20/+110°C	est.+interno ext. + indoor
32	VP	1/4" - 1 1/2"	-	steel acciaio	flat face faccia piana	screw to connect a vite	0-500 bar	-20/+110°C	est.+interno ext. + indoor
34	X	1/8" - 1"	iso 7241-b	A316 inox	poppet funghetto	ball locking sfere radiali	0-100 bar	-15/+180°C	corrosivo corrosive
36	R	1 1/4" - 3"	our design ns.design	A316 inox	poppet funghetto	ball locking sfere radiali	0-40 bar	-20/+180°C	corrosivo corrosive
38	Z	1/4" - 2 1/2"	our design ns.design	A316 inox	poppet funghetto	screw to connect a vite	0-400 bar	-15/+180°C	cor. + marino cor. + marine
40	Q	1/4" - 2"	htma (3/8)	steel+QPQ acciaio+QPQ	flat face faccia piana	ball locking sfere radiali	0-250 bar	-50/+300°C	corrosivo corrosive
42	L	1/4" - 1 1/2"	htma (3/8)	A316 inox	flat face faccia piana	ball locking sfere radiali	0-140 bar	-15/+180°C	corrosivo corrosive
44	M	1/4" - 1 1/2"	htma (3/8)	A316 inox	flat face faccia piana	ball locking sfere radiali	0-350 bar	-15/+180°C	cor. + marino cor. + marine

* **IMPORTANT NOTE:** the indicated performance data are guide lines only which are referred to a whole series in its various options. The actual performance of each coupling depends on the size in question, the type of material and on the selected seal; please refer to the following pages for more detailed specifications. In case of doubts or special applications, please contact our technical office.


* **NOTA IMPORTANTE:** i dati esposti in tabella sono linee guida riferite alle singole gamme nel loro insieme. Le prestazioni effettive di ciascun innesto dipendono dalla misura in questione, dal materiale adottato e dalla guarnizione selezionata. Per informazioni più dettagliate consultare le pagine seguenti. In caso di dubbi preghiamo contattare il nostro servizio tecnico-commerciale.

HOW TO SELECT THE RIGHT SERIES

This chart shows the potential application areas of each coupling series based on the possible working pressures and temperatures. The color used to represent each series indicates the type of environment in which that series is most frequently used. Different seals can be mounted on each series; the correct seal choice must be based on the type of media, working temperature and working pressure.

COME IDENTIFICARE LA SERIE GIUSTA

Il diagramma seguente offre alcune rapide indicazioni pratiche su come selezionare la corretta serie di innesti in base alle possibili condizioni applicative. In particolare vengono riportate la gamma di pressioni e temperature d'esercizio tipiche di ciascuna serie. Il colore con cui ciascuna serie è rappresentata è indicativo delle condizioni ambientali in cui detta serie trova di norma utilizzo preferenziale. Particolare attenzione va attribuita alla scelta delle guarnizioni che dovrà basarsi sul tipo di fluido, sulla temperatura e sulle pressioni d'esercizio.

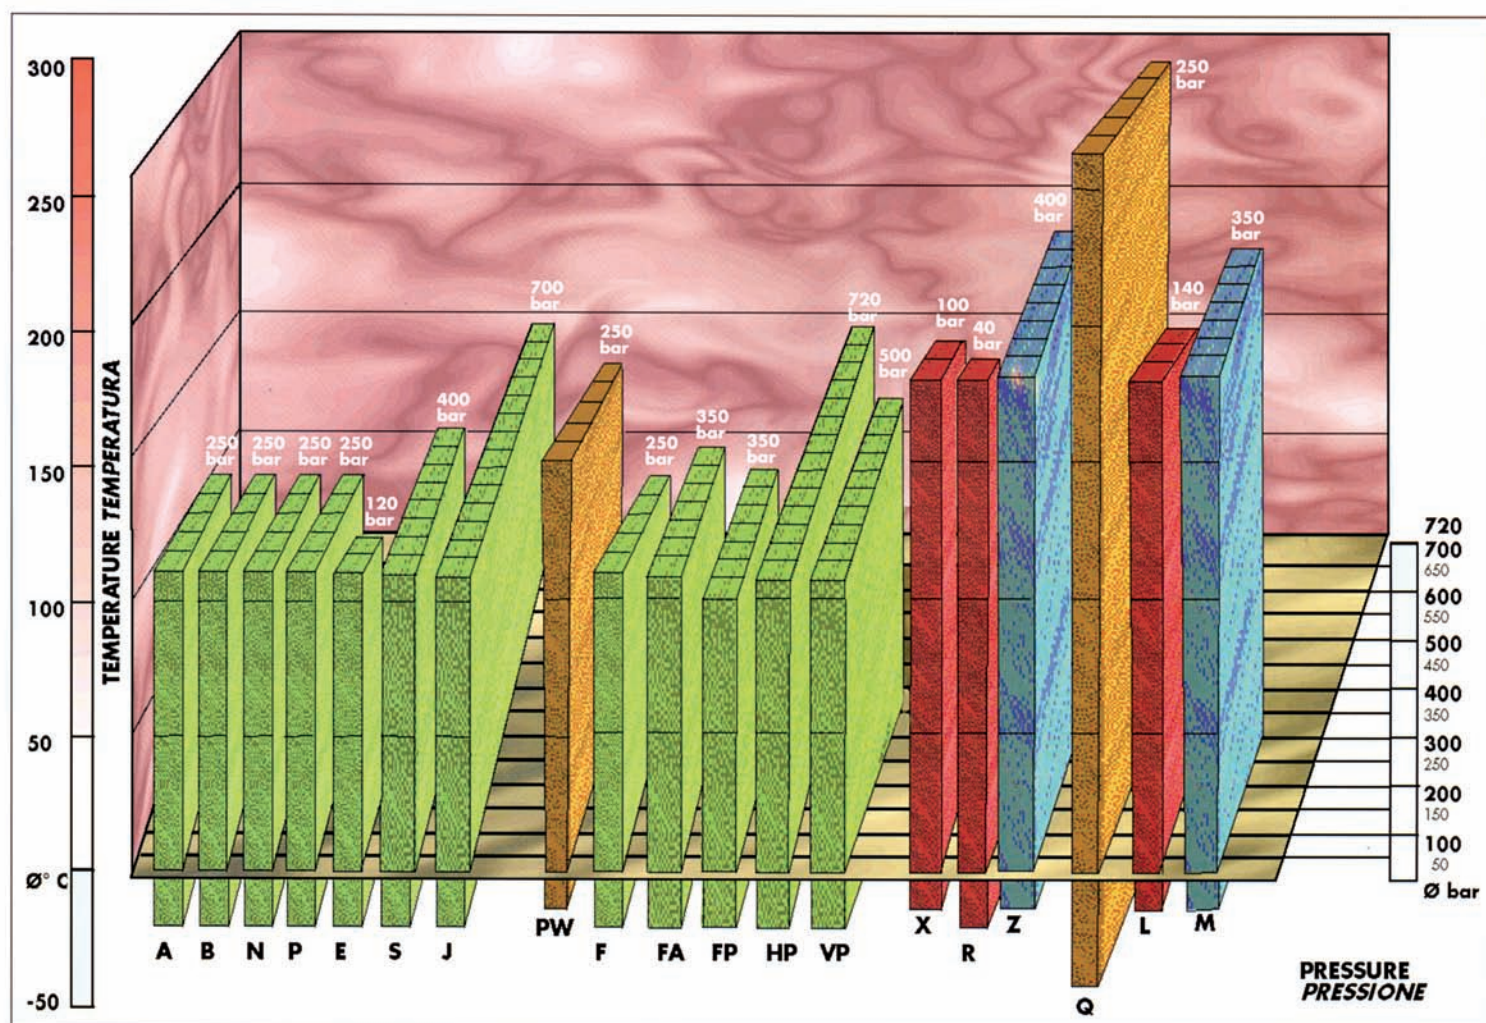

EXTERNAL ENVIRONMENT + INDOOR
AMBIENTE ESTERNO O INDOOR



EXTERNAL ENVIRONMENT + MARINE
AMBIENTE ESTERNO MARINO



MEDIUM CORROSIVE ENVIRONMENT
AMBIENTE MEDIAMENTE CORROSIVO



CORROSIVE ENVIRONMENT
AMBIENTE CORROSIVO

Dimensional data shown in this catalogue are subject to possible modifications.
I dati dimensionali contenuti in questo catalogo sono soggetti a possibili variazioni.

HOW TO ORDER

1 st	2 nd	3 rd	4 th	5 th	6 th
A	F	1	5	V	- 06

CODE EXAMPLE

1st **A** It indicates the series (see page 4)

2nd **F** It indicates:

F = Socket
M = Plug
C = Complete
 (socket + plug assembled)

3rd **1** It indicates:

for STANDARD VALVE couplings
 (poppet and ball type)

0 = Free flow
1 = Poppet valve
2 = Ball valve
3 = Valve allowing the connection
 under pressure (type 1)
4 = Valve allowing the connection
 under pressure (type 2)

for FLAT FACE couplings

1 = Standard flow version
2 = High flow version

4th **5** It indicates the type of thread:

0 = BSPP (parallel)
1 = METRIC MALE 24° light series L
2 = METRIC MALE 24° heavy series S
3 = METRIC MALE 24° light series L bulkhead
4 = METRIC MALE 24° heavy series S bulkhead
5 = NPTF
6 = METRIC FEMALE (parallel)
7 = UNF
8 = BSPT (tapered)
9 = SAE

5th **V** This position is expressed only in case of special seals: the standard seal of each series is indicated in the following pages.

V = Viton
K = Karlez
F = Fluorosilicone
E = EPDM
N = Nitrile
Neo = Neoprene

6th **06** It indicates the thread size.

Therefore:

AF 15V-06 = series A, socket, poppet valve, NPTF, viton seals, 3/8" NPTF.

1°	2°	3°	4°	5°	6°
A	F	1	5	V	06

COME ORDINARE

← ESEMPIO DI CODICE →

Indica la serie a cui appartiene l'innesto considerato (vedi pagina 4)

A

1°

Significa:

F = Femmina
M = Maschio
C = Completo (maschio + femmina accoppiati)

F

2°

Significa:

per gli INNESTI
con valvola STANDARD
(a funghetto o sfera)

0 = Passaggio libero
1 = Valvola a funghetto
2 = Valvola a sfera
3 = Valvola per innesto
in pressione (tipo 1)
4 = Valvola per innesto
in pressione (tipo 2)

1

3°

per innesti a FACCE PIANE:

1 = Versione flusso standard
2 = Versione ad alto flusso

Indica il tipo di filettatura:

0 = BSP (gas cilindrico)
1 = MASCHIO 24° METRICO-serie leggera L
2 = MASCHIO 24° METRICO-serie pesante S
3 = MASCHIO 24° METRICO-serie leggera L- passaparete
4 = MASCHIO 24° METRICO-serie pesante S- passaparete
5 = NPTF
6 = METRICO FEMMINA
7 = UNF
8 = BSPT (conico)
9 = SAE

5

4°

Questa posizione è indicata soltanto in caso di guarnizione speciale. La guarnizione standard per ogni serie è indicata nelle pagine ad esse dedicate.

V = Viton
K = Karlez
F = Fluorosilicone
E = Etilenepropilene
N = Nitrile
Neo = Neoprene

V


5°

Identifica la misura della filettatura.

06

6°

Quindi: AF 15V-06 = serie A, femmina, valvola a funghetto, filettatura NPTF, guarnizioni Viton, 3/8" NPTF.

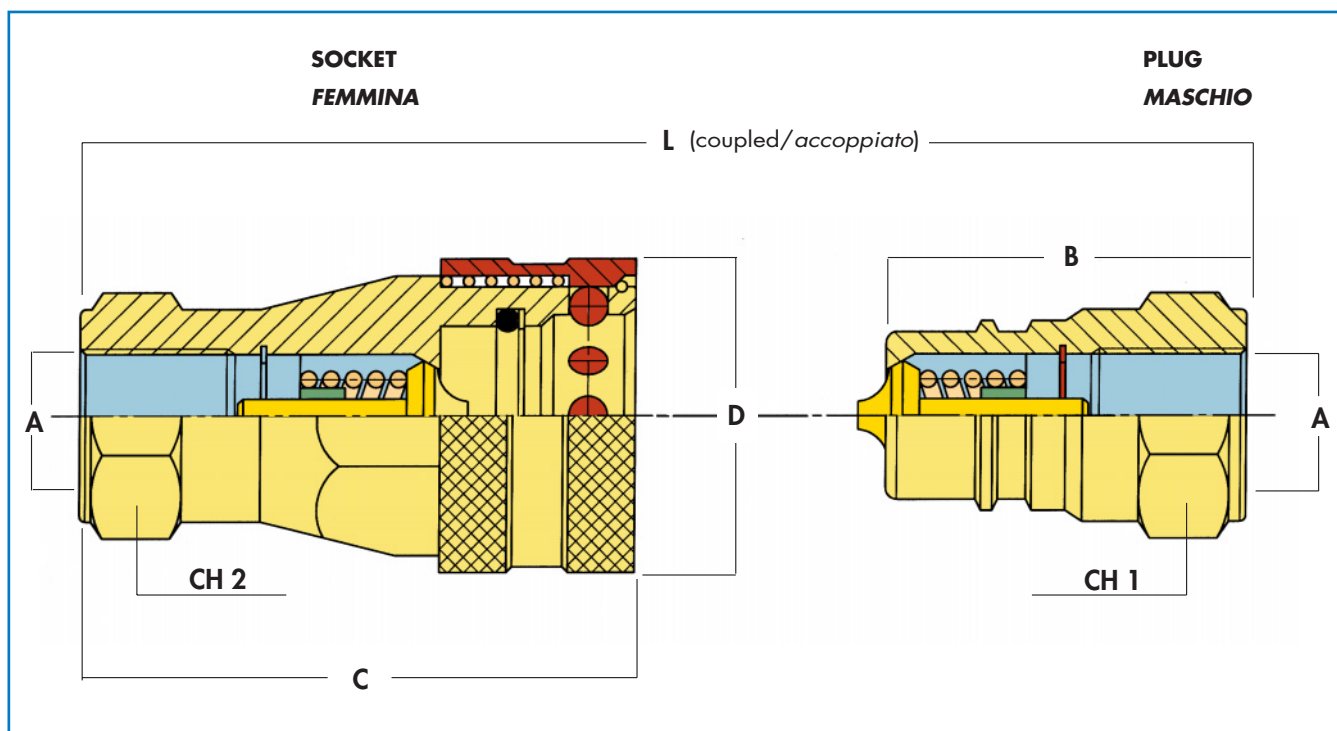

DIMENSIONS / DIMENSIONI

SIZE BASE	Ø DN		CODE / CODICE		ØA *	B		C		ØD		L		Ch1		Ch2	
	mm	inch	PLUG MASCHIO	SOCKET FEMMINA		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
04	6	1/4"	AM10-04	AF10-04	1/4"BSP	35	1.38	47,0	1.85	25	0.98	71,0	2.80	19	0.75	19	0.75
			AM15-04	AF15-04	1/4"NPTF												
			AM18-04	AF18-04	1/4"BSPT												
06	10	3/8"	AM10-06	AF10-06	3/8"BSP	39	1.54	58,0	2.28	31	1.22	79,5	3.13	22	0.87	24	0.94
			AM15-06	AF15-06	3/8"NPTF												
			AM18-06	AF18-06	3/8"BSPT												
08	12	1/2"	AM10-08	AF10-08	1/2"BSP	46	1.81	67,5	2.66	38	1.50	92,0	3.62	27	1.06	30	1.18
			AM15-08	AF15-08	1/2"NPTF												
			AM18-08	AF18-08	1/2"BSPT												
12	20	3/4"	AM10-12	AF10-12	3/4"BSP	54	2.13	81,0	3.19	46	1.81	108,0	4.25	34	1.34	38	1.50
			AM15-12	AF15-12	3/4"NPTF												
			AM18-12	AF18-12	3/4"BSPT												
16	25	1"	AM10-16	AF10-16	1"BSP	62	2.44	96,0	3.78	55	2.17	124,0	4.88	41	1.61	45	1.77
			AM15-16	AF15-16	1"NPTF												
			AM18-16	AF18-16	1"BSPT												
20	32	1.1/4"	AM10-20	AF10-20	1.1/4"BSP	75	2.95	117,0	4.61	65	2.56	151,0	5.94	55	2.17	50	1.97
			AM15-20	AF15-20	1.1/4"NPTF												
			AM18-20	AF18-20	1.1/4"BSPT												
24	38	1.1/2"	AM10-24	AF10-24	1.1/2"BSP	85	3.35	135,0	5.31	80	3.15	171,0	6.73	60	2.36	60	2.36
			AM15-24	AF15-24	1.1/2"NPTF												
			AM18-24	AF18-24	1.1/2"BSPT												
32	50	2"	AM10-32	AF10-32	2"BSP	100	3.94	160,0	6.30	100	3.94	201,0	7.91	75	2.95	75	2.95
			AM15-32	AF15-32	2"NPTF												
			AM18-32	AF18-32	2"BSPT												

* Other threads available on request
Ulteriori filettature disponibili a richiesta

MAIN DATA:

Series A is designed to interchange and perform according to ISO 7241-A standard.

It is one of the most popular coupling design worldwide and is indicated for several mobile and industrial applications.

- Interchangeability according to ISO 7241-A
- Standard material: steel
- Plugs treated with induction hardening
- Internal valves in hardened steel
- Standard seals in nitril rubber
- Back - up seals in teflon
- Working temperature with standard nitril seals: - 20° C / + 110° C
- Special seals on request: Viton, EPDM, Neoprene
- 1/2" plug and socket are also available in a special version allowing their connection in presence of residual back pressure.

CARATTERISTICHE PRINCIPALI:


La serie A ha intercambiabilità e prestazioni secondo la normativa ISO 7241-A.

Si tratta di uno tra i più diffusi tipi di innesto rapido a livello internazionale e trova applicazione su un'ampia gamma di attrezzature mobili e industriali.

- Intercambiabilità secondo ISO 7241-A
- Materiale standard: acciaio
- Parte maschio in acciaio temprato ad induzione
- Valvole interne in acciaio temprato
- Guarnizioni standard in gomma nitrilica
- Anelli antiestrusione in teflon
- Temperature esercizio con guarnizioni standard: -20° C / + 110° C
- Guarnizioni speciali a richiesta: Viton, EPDM, Neoprene
- Gli innesti maschio e femmina da 1/2" sono disponibili anche in una versione speciale che permette il loro aggancio in presenza di pressioni residue.

"A" SERIES COUPLINGS
PRESSURE DROP GRAPH

GRAFICO PERDITE DI CARICO
INNESTI SERIE "A"

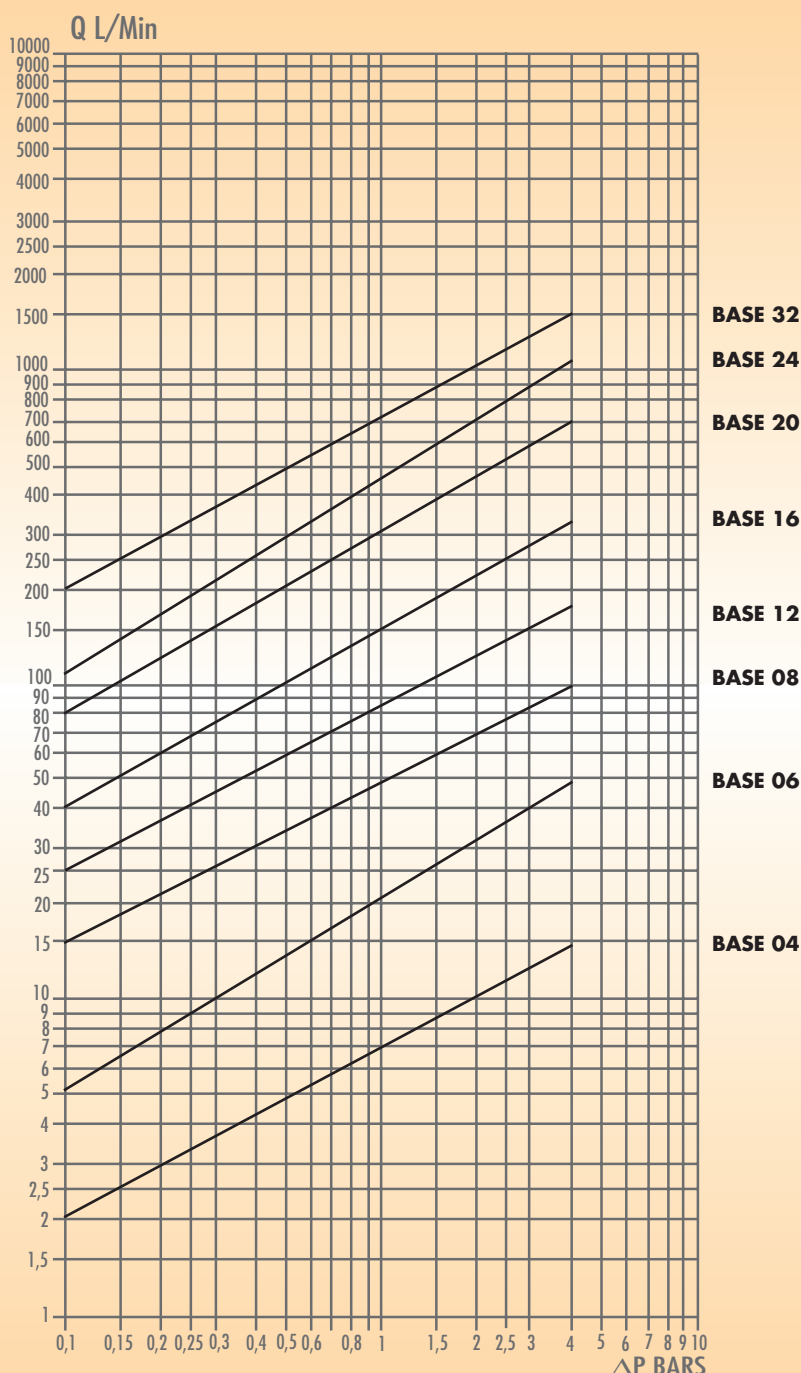


FLUID: HYDRAULIC OIL SAE 10W
TEMPERATURE: 50° C
VISCOSITY: 3 E°

FLUIDO: OLIO IDRAULICO SAE 10W
TEMPERATURA: 50° C
VISCOSITA': 3 E°

PERFORMANCES / PRESTAZIONI

SIZE BASE	Ø DN		MAX. WORK PRESSURE MAX PRESSIONE ESERCIZIO		BURST PRESSURE PRESSIONE SCOPPIO		WEIGHT / PESO			
	mm	inch	bar	psi	bar	psi	PLUG / MASCHIO		SOCKET / FEMMINA	
	kg	lbs	kg	lbs						
04	6	1/4"	350	5075	1400	20300	0,045	0,100	0,080	0.18
06	10	3/8"	315	4567	1260	18270	0,055	0,122	0,150	0.33
08	12	1/2"	250	3625	1000	14500	0,090	0,200	0,270	0.60
12	20	3/4"	250	3625	1000	14500	0,185	0,410	0,465	1.03
16	25	1"	230	3335	920	13340	0,270	0,600	0,720	1.60
20	32	1.1/4"	230	3335	920	13340	0,600	1,330	1,250	2.78
24	38	1.1/2"	190	2755	760	11020	0,900	2,000	2,100	4.67
32	50	2"	130	1885	520	7540	1,450	3,220	4,150	9.22

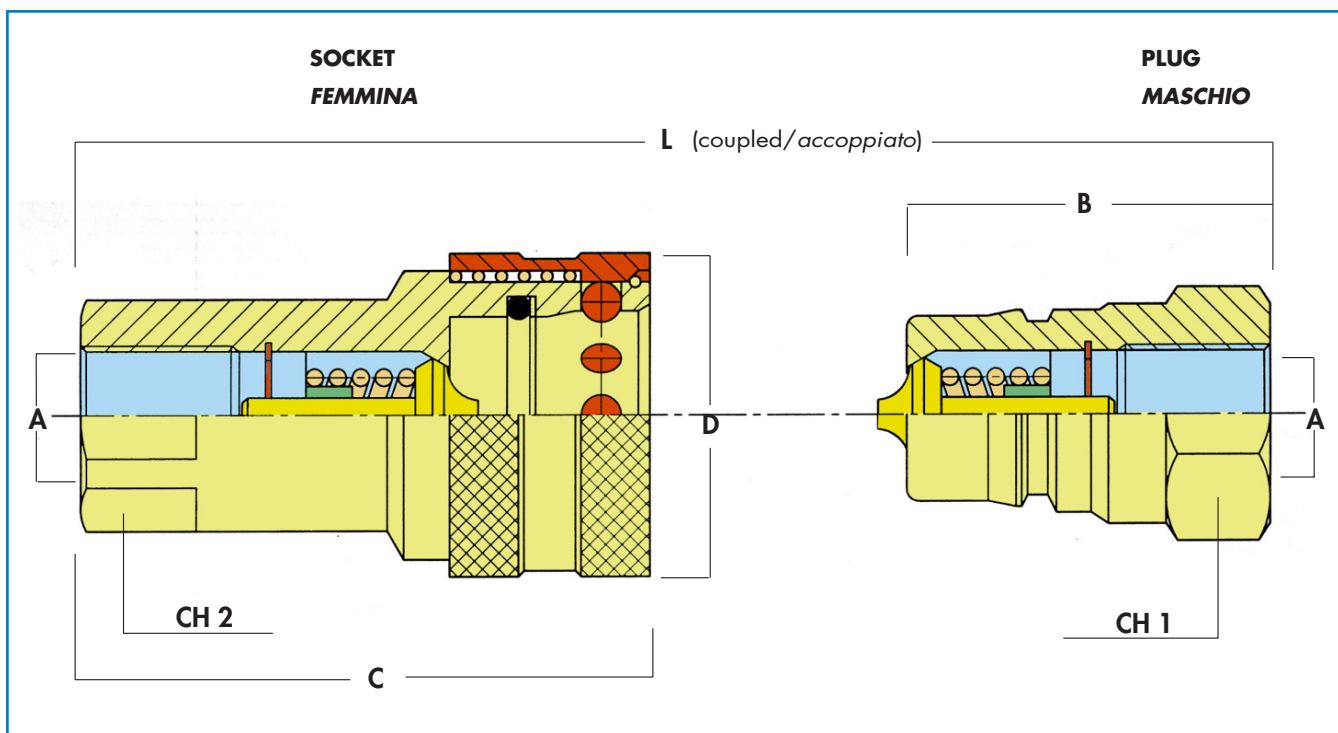

DIMENSIONS / DIMENSIONI

SIZE BASE	Ø DN		CODE / CODICE		ØA*	B		C		ØD		L		Ch1		Ch2	
	mm	inch	PLUG MASCHIO	SOCKET FEMMINA		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
02	3	1/8"	BM10-02	BF10-02	1/8"BSP	30	1.18	49	1.93	24	0.94	60,5	2.38	14	0.55	14	0.55
			BM15-02	BF15-02	1/8"NPTF												
04	6	1/4"	BM10-04	BF10-04	1/4"BSP	35	1.38	57	2.24	27	1.06	70,5	2.78	19	0.75	19	0.75
			BM15-04	BF15-04	1/4"NPTF												
06	10	3/8"	BM10-06	BF10-06	3/8"BSP	41	1.61	66	2.60	34	1.34	82,5	3.25	24	0.94	24	0.94
			BM15-06	BF15-06	3/8"NPTF												
08	12	1/2"	BM10-08	BF10-08	1/2"BSP	46	1.81	74	2.91	42	1.65	92,5	3.64	27	1.06	27	1.06
			BM15-08	BF15-08	1/2"NPTF												
12	20	3/4"	BM10-12	BF10-12	3/4"BSP	55	2.17	90	3.54	50	1.97	111,0	4.37	36	1.42	36	1.42
			BM15-12	BF15-12	3/4"NPTF												
16	25	1"	BM10-16	BF10-16	1"BSP	66	2.60	106	4.17	60	2.36	133,0	5.24	41	1.61	41	1.61
			BM15-16	BF15-16	1"NPTF												

* Other threads available on request
Ulteriori filettature disponibili a richiesta

MAIN DATA:

Series B is designed to interchange and perform according to ISO 7241-B standard.

It is one of the most popular coupling design worldwide and is indicated for several industrial applications.

- Interchangeability according ISO 7241-B
- Standard material: steel
- Plugs treated with induction hardening
- Internal valves in hardened steel
- Standard seals in nitril rubber
- Back - up seals in teflon
- Working temperature with standard nitril seals: - 20° C / + 110° C
- Special seals on request: Viton, EPDM, Neoprene

CARATTERISTICHE PRINCIPALI:


La serie B ha intercambiabilità e prestazioni secondo la normativa ISO 7241-B.

Si tratta di uno tra i più diffusi tipi di innesto rapido a livello internazionale e trova applicazione su un'ampia gamma di attrezzature industriali.

- Intercambiabilità secondo ISO 7241-B
- Materiale standard: acciaio
- Parte maschio in acciaio temprato ad induzione
- Valvole interne in acciaio temprato
- Guarnizioni standard in gomma nitrilica
- Anelli antiestrusione in teflon
- Temperature esercizio con guarnizioni standard: -20° C / + 110° C
- Guarnizioni speciali a richiesta: Viton, EPDM, Neoprene

"B" SERIES COUPLINGS
PRESSURE DROP GRAPH

GRAFICO PERDITE DI CARICO
INNESTI SERIE "B"

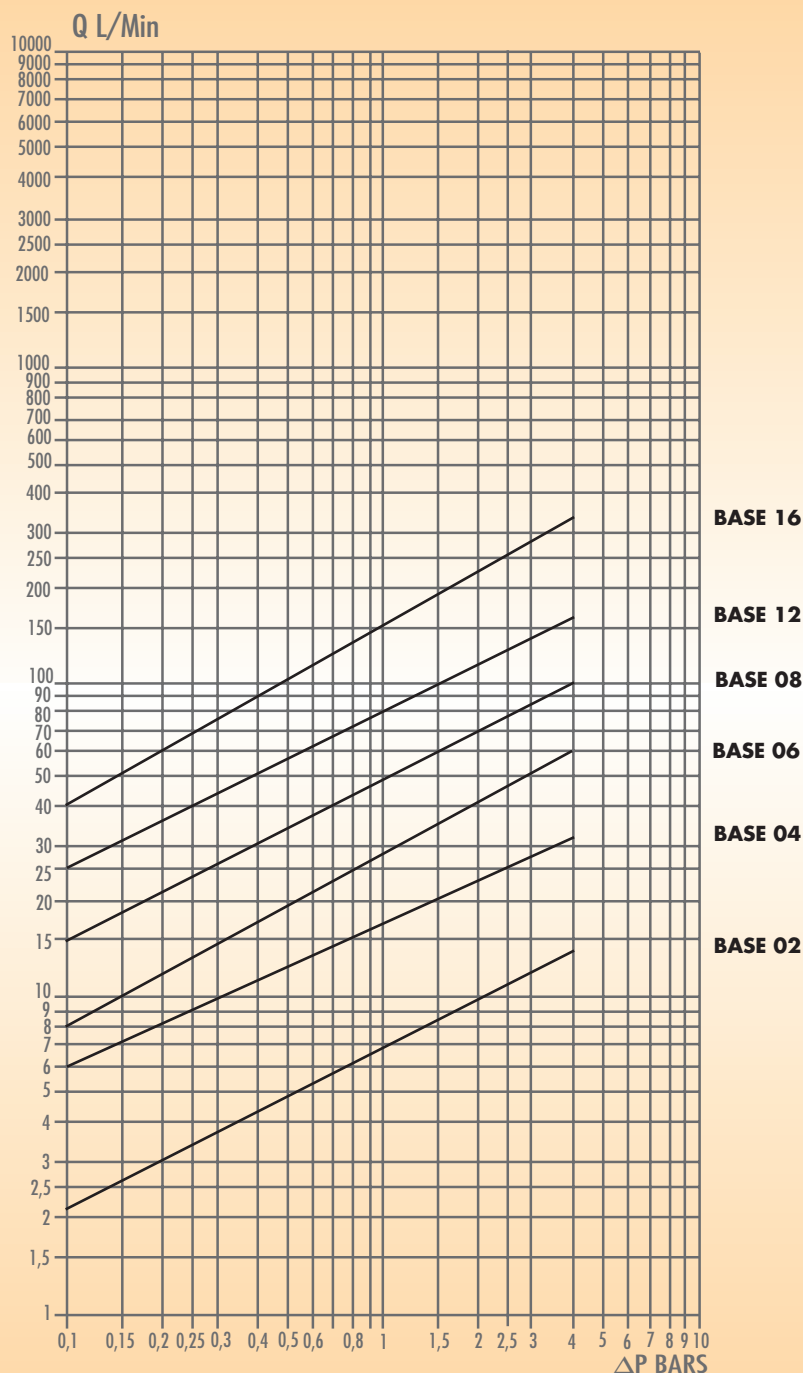


FLUID: IDRAULIC OIL SAE 10W
TEMPERATURE: 50° C
VISCOSITY: 3 E°

FLUIDO: OLIO IDRAULICO SAE 10W
TEMPERATURA: 50° C
VISCOSITA': 3 E°


PERFORMANCES / PRESTAZIONI

SIZE BASE	Ø DN		MAX. WORK PRESSURE MAX. PRESSIONE ESERCIZIO		BURST PRESSURE PRESSIONE SCOPPIO		WEIGHT / PESO			
	mm	inch	bar	psi	bar	psi	PLUG / MASCHIO		SOCKET / FEMMINA	
	kg	lbs	kg	lbs						
02	5	1/8"	350	5075	1400	20300	0,020	0.04	0,070	0.16
04	6,3	1/4"	350	5075	1400	20300	0,040	0.08	0,120	0.26
06	10	3/8"	300	4350	1200	17400	0,070	0.16	0,220	0.49
08	12,5	1/2"	280	4060	1120	16240	0,102	0.23	0,322	0.72
12	20	3/4"	180	2610	720	10440	0,195	0.43	0,585	1.30
16	25	1"	150	2175	600	8700	0,370	0.82	0,860	1.91

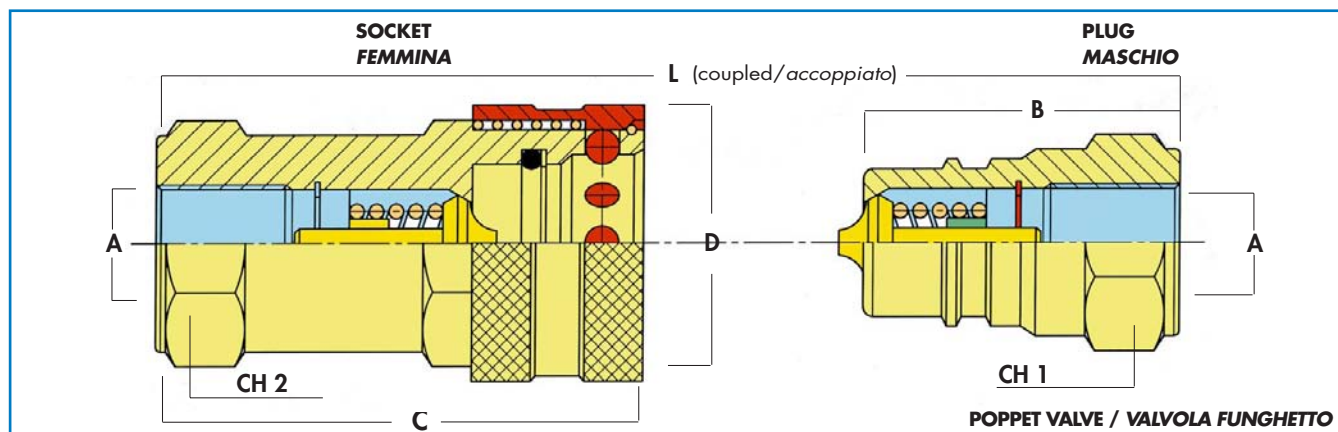

DIMENSIONS / DIMENSIONI

SIZE BASE	Ø DN		CODE / CODICE		ØA*	B		C		Ø D		L		Ch1		Ch2	
	mm	inch	PLUG MASCHIO	SOCKET FEMMINA		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
04	6	1/4"	NM10-04	NF10-04	1/4"BSP	35	1.38	52	2.05	27	1.06	70,5	2.78	19	0.75	21	0.83
			NM15-04	NF15-04	1/4"NPTF												
06	10	3/8"	NM10-06	NF10-06	3/8"BSP	39	1.54	60,5	2.38	31	1.22	79,5	3.13	22	0.87	24	0.94
			NM15-06	NF15-06	3/8"NPTF												
			NM18-06	NF18-06	3/8"BSPT												
08	12	1/2"	AM10-08	AF10-08	1/2"BSP	46	1.81	67,5	2.66	38	1.50	92	3.62	27	1.06	30	1.18
			AM15-08	AF15-08	1/2"NPTF												
			AM18-08	AF18-08	1/2"BSPT												
12	20	3/4"	NM10-12	NF10-12	3/4"BSP	53	2.09	82	3.23	46	1.81	106	4.17	34	1.34	38	1.50
			NM15-12	NF15-12	3/4"NPTF												
16	25	1"	NM10-16	NF10-16	1"BSP	58	2.28	95	3.74	55	2.17	120	4.72	41	1.61	45	1.77
			NM15-16	NF15-16	1"NPTF												

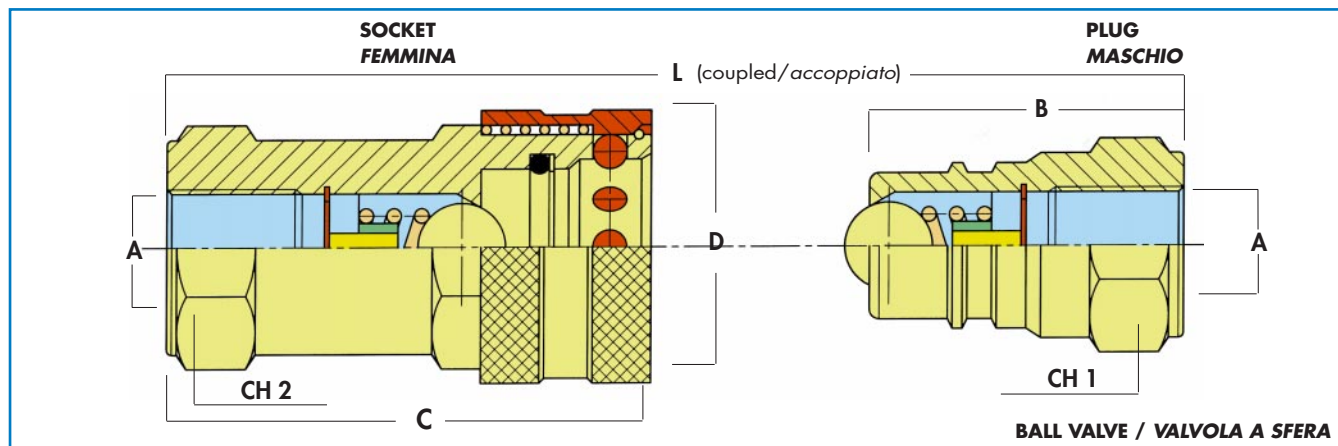

DIMENSIONS / DIMENSIONI

SIZE BASE	Ø DN		CODE / CODICE		ØA*	B		C		Ø D		L		Ch1		Ch2	
	mm	inch	PLUG MASCHIO	SOCKET FEMMINA		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
04	6	1/4"	NM20-04	NF20-04	1/4"BSP	35	1.38	52	2.05	27	1.06	70,5	2.78	19	0.75	21	0.83
			NM25-04	NF25-04	1/4"NPTF												
06	10	3/8"	NM20-06	NF20-06	3/8"BSP	39	1.54	60,5	2.38	31	1.22	79,5	3.13	22	0.87	24	0.94
			NM25-06	NF25-06	3/8"NPTF												
			NM28-06	NF28-06	3/8"BSPT												
08	12	1/2"	AM20-08	AF20-08	1/2"BSP	46	1.81	67,5	2.66	38	1.50	92	3.62	27	1.06	30	1.18
			AM25-08	AF25-08	1/2"NPTF												
			AM28-08	AF28-08	1/2"BSPT												
12	20	3/4"	NM20-12	NF20-12	3/4"BSP	53	2.09	82	3.23	46	1.81	106	4.17	34	1.34	38	1.50
			NM25-12	NF25-12	3/4"NPTF												
16	25	1"	NM20-16	NF20-16	1"BSP	58	2.28	95	3.74	55	2.17	120	4.72	41	1.61	45	1.77
			NM25-16	NF25-16	1"NPTF												

* Other threads available on request
Ulteriori filettature disponibili a richiesta

MAIN DATA:

Series N design, also known as agricultural interchange, is probably the most popular coupling design worldwide on agricultural applications. The size $\frac{1}{2}$ " is identical to series A, ISO 7241-A interchangeable.

- Available with both poppet and ball valve
- Standard material: steel
- Plugs treated with induction hardening
- Internal valves in hardened steel
- Standard seals in nitril rubber
- Back - up seals in teflon
- Working temperature with standard nitril seals: - 20° C / + 110° C
- Special seals on request: Viton, EPDM, Neoprene
- $\frac{1}{2}$ " plug and socket are also available in a special version allowing their connection in presence of residual back pressure.

CARATTERISTICHE PRINCIPALI:


La serie N corrisponde al tipo di intercambiabilità più diffusa a livello internazionale per applicazioni relative a macchine ed attrezzature agricole.

La misura $\frac{1}{2}$ " è identica alla serie A ed è quindi intercambiabile secondo la norma ISO 7241-A.

- Disponibile con valvola a funghetto o sfera
- Materiale standard: acciaio
- Parte maschio in acciaio temprato ad induzione
- Valvole interne in acciaio temprato
- Guarnizioni standard in gomma nitrilica
- Anelli antiestrusione in teflon
- Temperature esercizio con guarnizioni standard: -20° C / + 110° C
- Guarnizioni speciali a richiesta: Viton, EPDM, Neoprene
- Gli innesti maschio e femmina da $\frac{1}{2}$ " sono disponibili anche in una versione speciale che permette il loro aggancio in presenza di pressioni residue.

"N" SERIES COUPLINGS
PRESSURE DROP GRAPH

GRAFICO PERDITE DI CARICO
INNESTI SERIE "N"

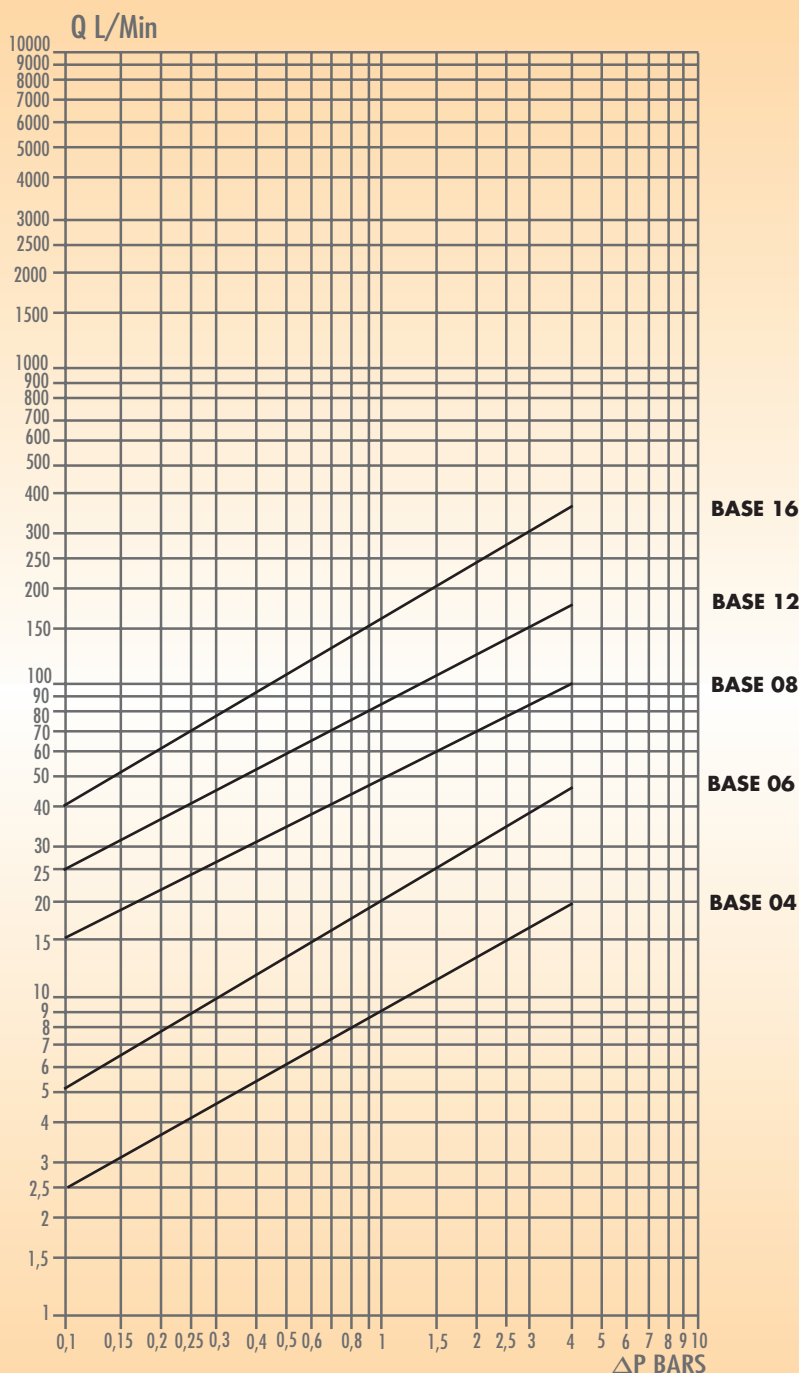

FLUID: HIDRAULIC OIL SAE 10W
TEMPERATURE: 50° C
VISCOSITY: 3 E°

FLUIDO: OLIO IDRAULICO SAE 10W
TEMPERATURA: 50° C
VISCOSITA': 3 E°


Perdite di carico riferite ad innesti con valvola a funghetto
These pressure drops are referred to poppet valve couplings

PERFORMANCES / PRESTAZIONI

SIZE BASE	Ø DN		MAX.WORK PRESSURE MAX PRESSIONE ESERCIZIO		BURST PRESSURE PRESSIONE SCOPPIO		WEIGHT / PESO			
							PLUG / MASCHIO		SOCKET / FEMMINA	
	mm	inch	bar	psi	bar	psi	kg	lbs	kg	lbs
04	6	1/4"	350	5075,0	1400	20300	0,04	0,08	0,10	0,22
06	10	3/8"	315	4567,5	1260	18270	0,07	0,15	0,20	0,44
08	12	1/2"	250	3625,0	1000	14500	0,09	0,20	0,26	0,57
12	20	3/4"	250	3625,0	1000	14500	0,18	0,40	0,50	1,11
16	25	1"	230	3335,0	920	13340	0,23	0,51	0,76	1,68


SERIES P

SERIE P

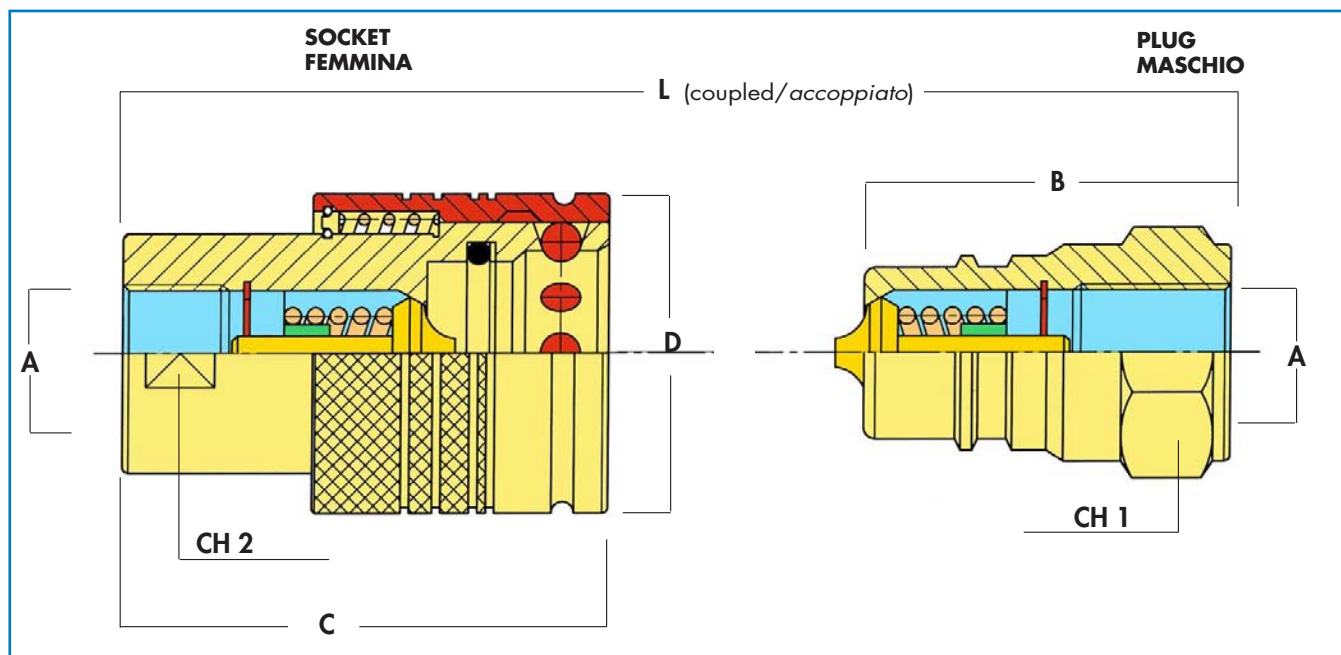

DIMENSIONS / DIMENSIONI

SIZE BASE	Ø DN		CODE / CODICE		ØA*	B		C		Ø D		L		Ch1		Ch2	
	mm	inch	PLUG MASCHIO	SOCKET FEMMINA		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
08	12	1/2"	AM10-08	PF10-08	1/2"BSP	46	1.81	67	2,64	38	1.50	92	3.62	27	1.06	24	0.94
			AM15-08	PF15-08	1/2"NPT												

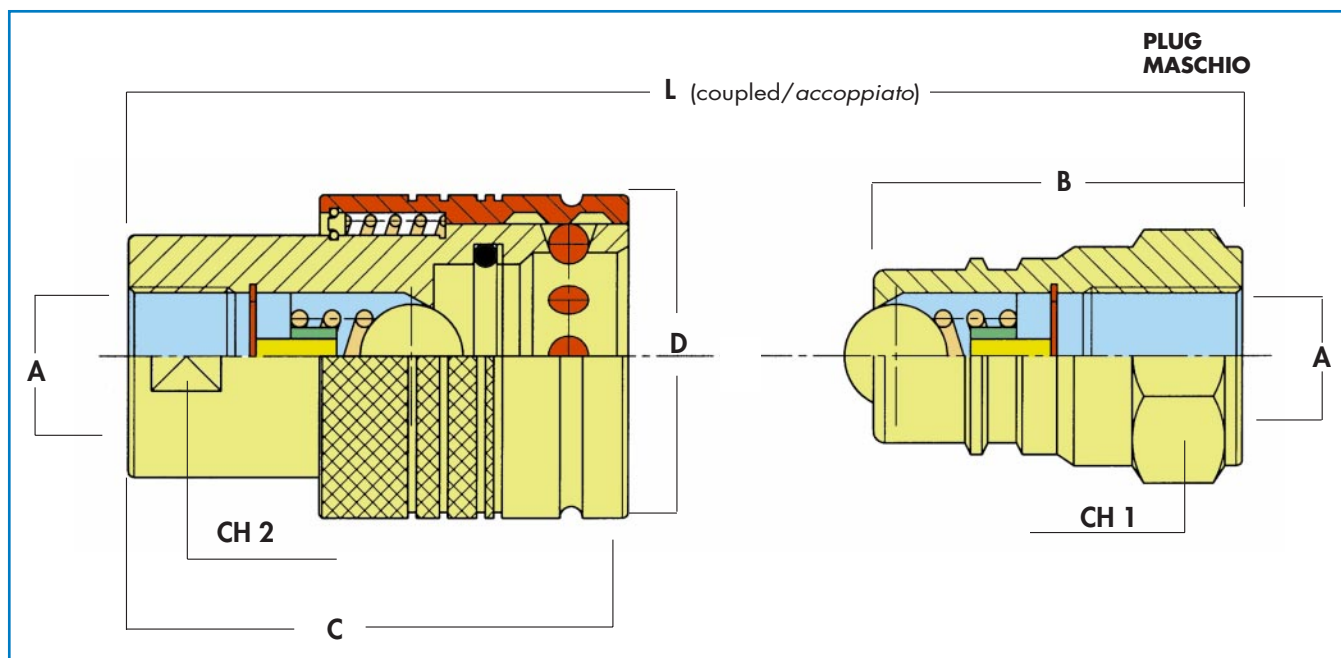

DIMENSIONS / DIMENSIONI

SIZE BASE	Ø DN		CODE / CODICE		ØA*	B		C		Ø D		L		Ch1		Ch2	
	mm	inch	PLUG MASCHIO	SOCKET FEMMINA		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
08	12	1/2"	AM20-08	PF20-08	1/2"BSP	46	1.81	67	2,64	38	1.50	92	3.62	27	1.06	24	0.94
			AM25-08	PF25-08	1/2"NPT												

* Other threads available on request
Ulteriori filettature disponibili a richiesta

MAIN DATA:

The P series push-pull couplings are interchangeable according to ISO 7241-A and ISO 5675.

These couplings are normally adopted on agricultural implements and applications; the possible panel mounting allows to easily connect and disconnect plug and socket with one hand only.

P series couplings are available with both poppet valve and ball valve; the standard thread are BSP, NPTF and metric male 24° according to DIN 2353.

Main data:

- Poppet or ball valves
- Interchangeable ISO 7241-A and ISO 5675
- Material: steel
- Poppet valve in hardened steel
- Plug in hardened steel
- Working temperatures with standard seals -20 °C / +110 °C
- Standard seals in nitril rubber
- Back-up ring in PTFE

Special features:

a special valve is available on request to allow the plug to be connected in presence of residual back pressure.

CARATTERISTICHE PRINCIPALI:

Gli innesti rapidi push-pull serie P sono disponibili con valvola a funghetto o a sfera in varie opzioni di filettatura : BSP, NPT e metrica 24° DIN 2353.

Questa serie viene tipicamente utilizzata su macchine e attrezzature agricole dove si caratterizza per la possibilità di montaggio a parete con il possibile aggancio / sgancio con una sola mano.

Questo innesto è intercambiabile secondo le normative iso 7241-A e ISO 5675.

Caratteristiche base:


- Valvola a funghetto o a sfera.
- Materiale : acciaio
- Valvola a funghetto in acciaio temprato
- Guarnizioni standard in gomma nitrilica
- Anelli antiestrusione in PTFE
- Temperature di esercizio con guarnizioni standard: -20 °C / +110 °C

Opzioni speciali:

L'innesto è disponibile con una valvola speciale che permette aggancio anche in presenza di pressioni residue.

"P" SERIES COUPLINGS
PRESSURE DROP GRAPH

GRAFICO PERDITE DI CARICO
INNESTI SERIE "P"

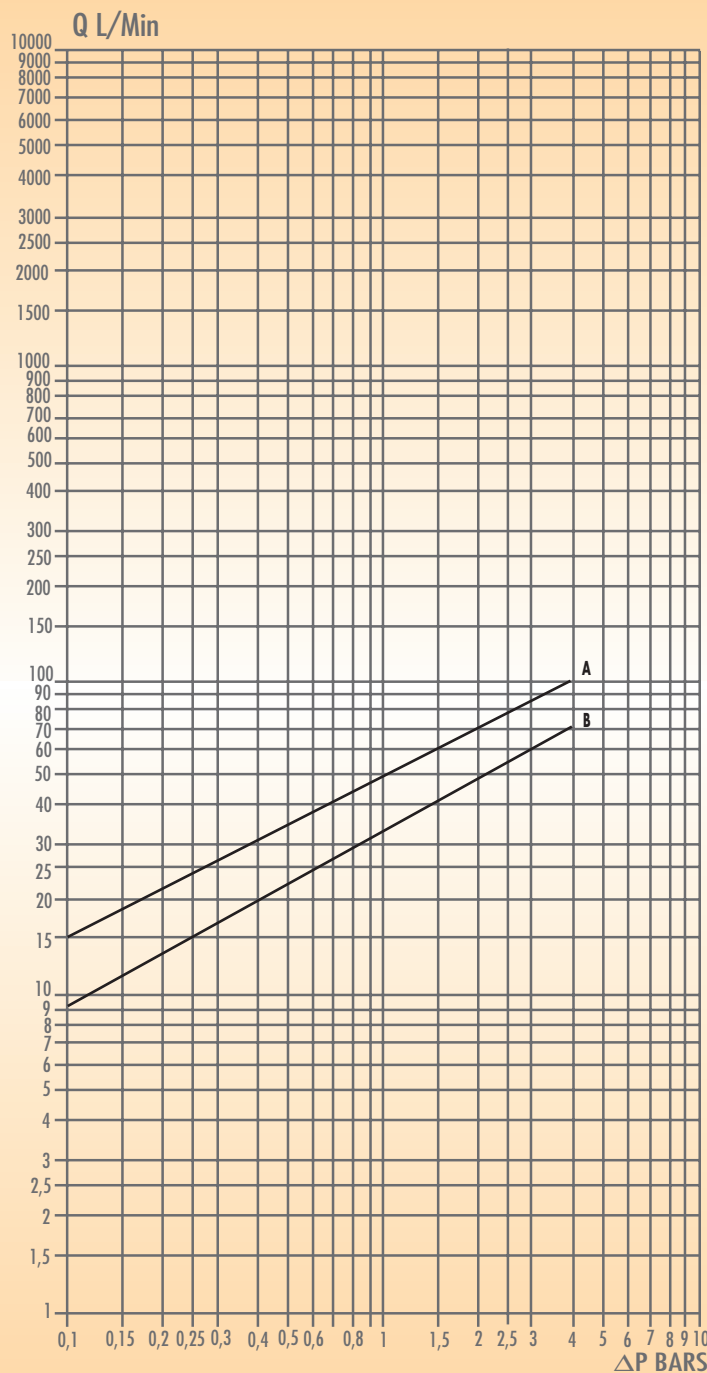


A = POPPET VALVE
VALVOLA A FUNGHETTO
B = BALL VALVE
VALVOLA A SFERA

FLUID: HIDRAULIC OIL SAE 10W
TEMPERATURE: 50° C
VISCOSITY: 3 E°

FLUIDO: OLIO IDRAULICO SAE 10W
TEMPERATURA: 50° C
VISCOSITA': 3 E°

PERFORMANCES / PRESTAZIONI

SIZE BASE	Ø DN		MAX.WORK PRESSURE MAX PRESSIONE ESERCIZIO		BURST PRESSURE PRESSIONE SCOPPIO		WEIGHT / PESO			
	mm	inch	bar	psi	bar	psi	PLUG / MASCHIO		SOCKET / FEMMINA	
08	12	1/2"	250	3625	1000	14500	0,090	0.200	0,200	0.613

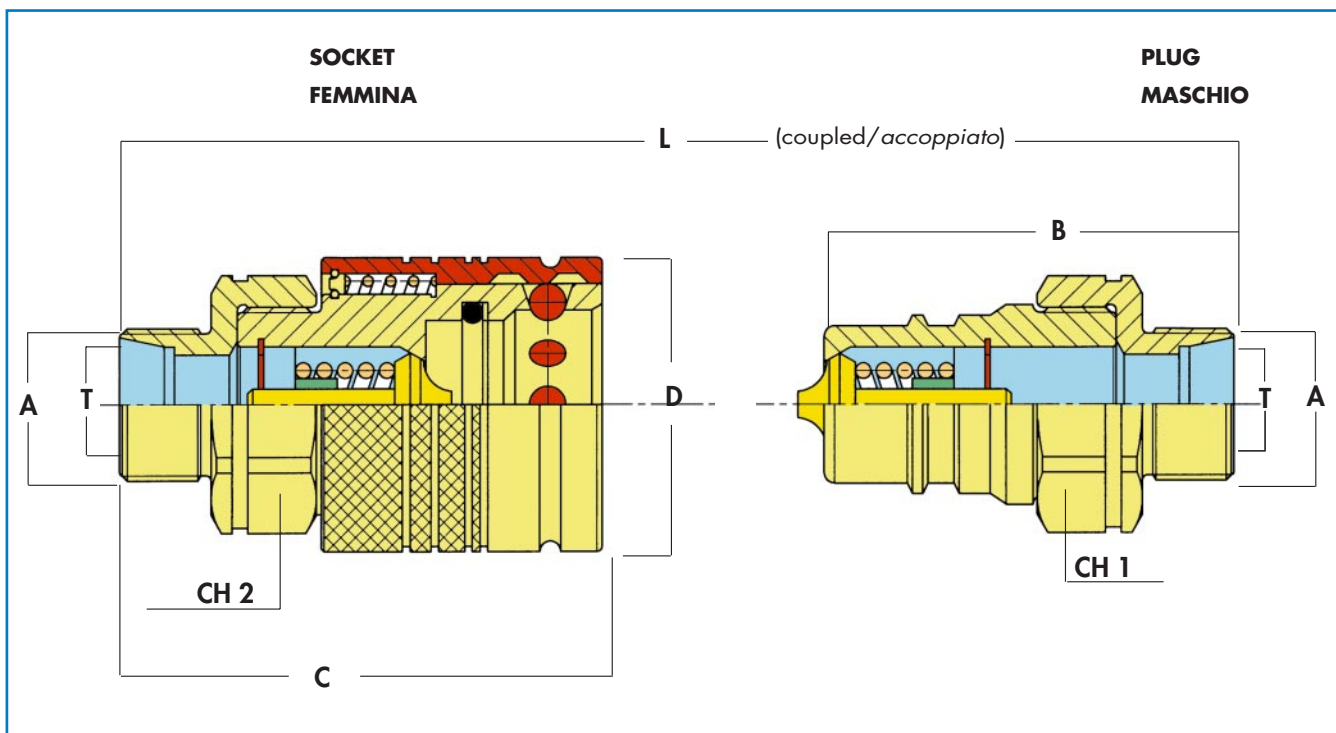


DIMENSIONS / DIMENSIONI

SIZE BASE	Ø DN		CODE / CODICE		ØT	ØA	B		C		Ø D		L		Ch1		Ch2	
	mm	inch	PLUG MASCHIO	SOCKET FEMMINA			mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
08	12	1/2"	AM11-08L	PF11-08L	8	M14X1,5	56	2,20	76	2,99	38	1,50	111	4,37	30	1,18	30	1,18
08	12	1/2"	AM11-10L	PF11-10L	10	M16X1,5	57	2,24	77	3,03	38	1,50	113	4,45	30	1,18	30	1,18
08	12	1/2"	AM11-12L	PF11-12L	12	M18X1,5	57	2,24	77	3,03	38	1,50	113	4,45	30	1,18	30	1,18
08	12	1/2"	AM11-15L	PF11-15L	15	M22X1,5	58	2,28	78	3,07	38	1,50	115	4,53	30	1,18	30	1,18
08	12	1/2"	AM11-18L	PF11-18L	18	M26X1,5	58	2,28	78	3,07	38	1,50	115	4,53	30	1,18	30	1,18

SIZE BASE	Ø DN		CODE / CODICE		ØT	ØA	B		C		Ø D		L		Ch1		Ch2	
	mm	inch	PLUG MASCHIO	SOCKET FEMMINA			mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
08	12	1/2"	AM12-08S	PF12-08S	8	M16X1,5	58	2,28	78	3,07	38	1,50	115	4,53	30	1,18	30	1,18
08	12	1/2"	AM12-10S	PF12-10S	10	M18X1,5	58	2,28	78	3,07	38	1,50	115	4,53	30	1,18	30	1,18
08	12	1/2"	AM12-12S	PF12-12S	12	M20X1,5	58	2,28	78	3,07	38	1,50	115	4,53	30	1,18	30	1,18
08	12	1/2"	AM12-14S	PF12-14S	14	M22X1,5	60	2,36	80	3,15	38	1,50	119	4,69	30	1,18	30	1,18
08	12	1/2"	AM12-16S	PF12-16S	16	M24X1,5	60	2,36	80	3,15	38	1,50	119	4,69	30	1,18	30	1,18
08	12	1/2"	AM12-20S	PF12-20S	20	M30X2	62	2,44	82	3,23	38	1,50	123	4,84	30	1,18	30	1,18

* Other threads available on request
Ulteriori filettature disponibili a richiesta

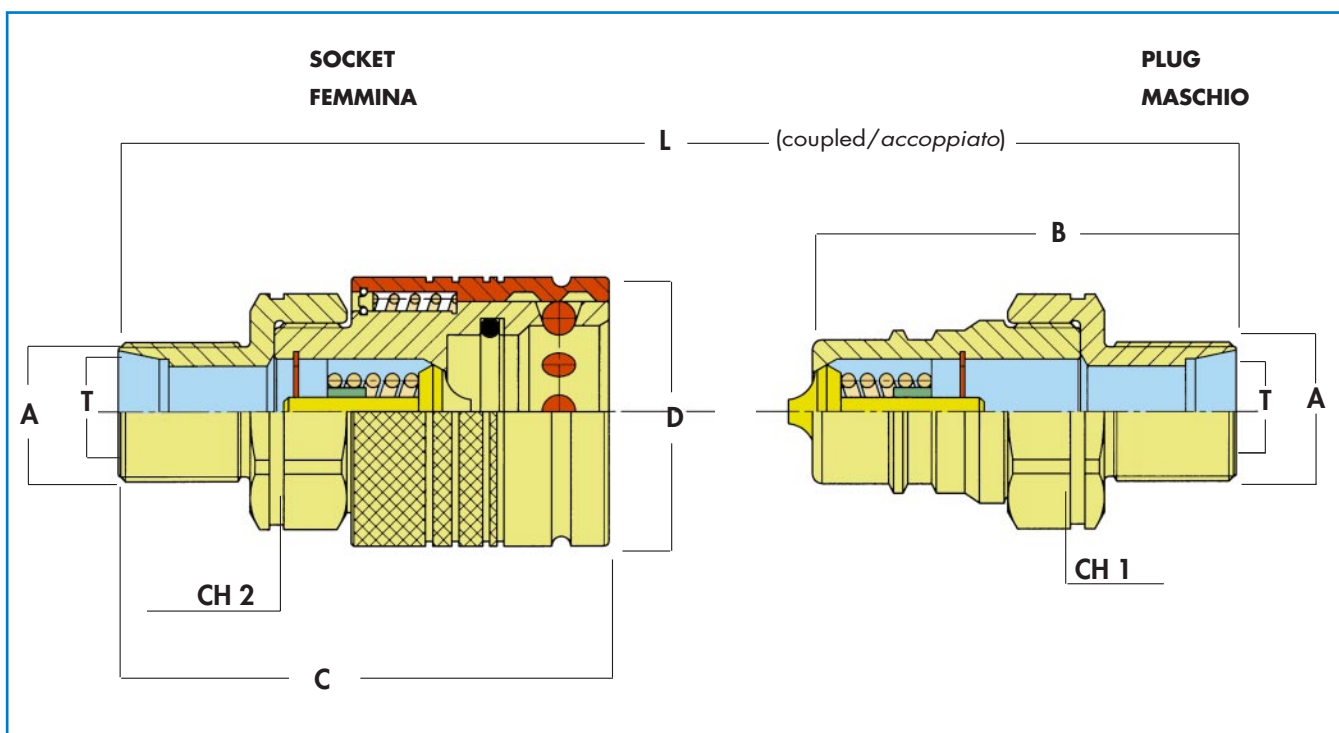

DIMENSIONS / DIMENSIONI

L


SIZE BASE	Ø DN		CODE / CODICE		ØT	ØA	B		C		Ø D		L		Ch1		Ch2	
	mm	inch	PLUG MASCHIO	SOCKET FEMMINA			mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
08	12	1/2"	AM13-08L	PF13-08L	8	M14X1,5	72	2,83	92	3,62	38	1,50	143	5,63	30	1,18	30	1,18
08	12	1/2"	AM13-10L	PF13-10L	10	M16X1,5	72	2,83	92	3,62	38	1,50	143	5,63	30	1,18	30	1,18
08	12	1/2"	AM13-12L	PF13-12L	12	M18X1,5	72	2,83	92	3,62	38	1,50	143	5,63	30	1,18	30	1,18
08	12	1/2"	AM13-15L	PF13-15L	15	M22X1,5	73	2,87	93	3,66	38	1,50	145	5,71	30	1,18	30	1,18
08	12	1/2"	AM13-18L	PF13-18L	18	M26X1,5	73	2,87	93	3,66	38	1,50	145	5,71	30	1,18	30	1,18

S

SIZE BASE	Ø DN*		CODE / CODICE		ØT	ØA	B		C		Ø D		L		Ch1		Ch2	
	mm	inch	PLUG MASCHIO	SOCKET FEMMINA			mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
08	12	1/2"	AM14-08S	PF14-08S	8	M16X1,5	73	2,87	93	3,66	38	1,50	145	5,71	30	1,18	30	1,18
08	12	1/2"	AM14-10S	PF14-10S	10	M18X1,5	73	2,87	93	3,66	38	1,50	145	5,71	30	1,18	30	1,18
08	12	1/2"	AM14-12S	PF14-12S	12	M20X1,5	73	2,87	93	3,66	38	1,50	145	5,71	30	1,18	30	1,18
08	12	1/2"	AM14-14S	PF14-14S	14	M22X1,5	75	2,95	95	3,74	38	1,50	149	5,87	30	1,18	30	1,18
08	12	1/2"	AM14-16S	PF14-16S	16	M24X1,5	75	2,95	95	3,74	38	1,50	149	5,87	30	1,18	30	1,18
08	12	1/2"	AM14-20S	PF14-20S	20	M30X2	78	3,07	98	3,86	38	1,50	155	6,10	30	1,18	30	1,18

* Other threads available on request
Ulteriori filettature disponibili a richiesta

SERIES E SERIE E

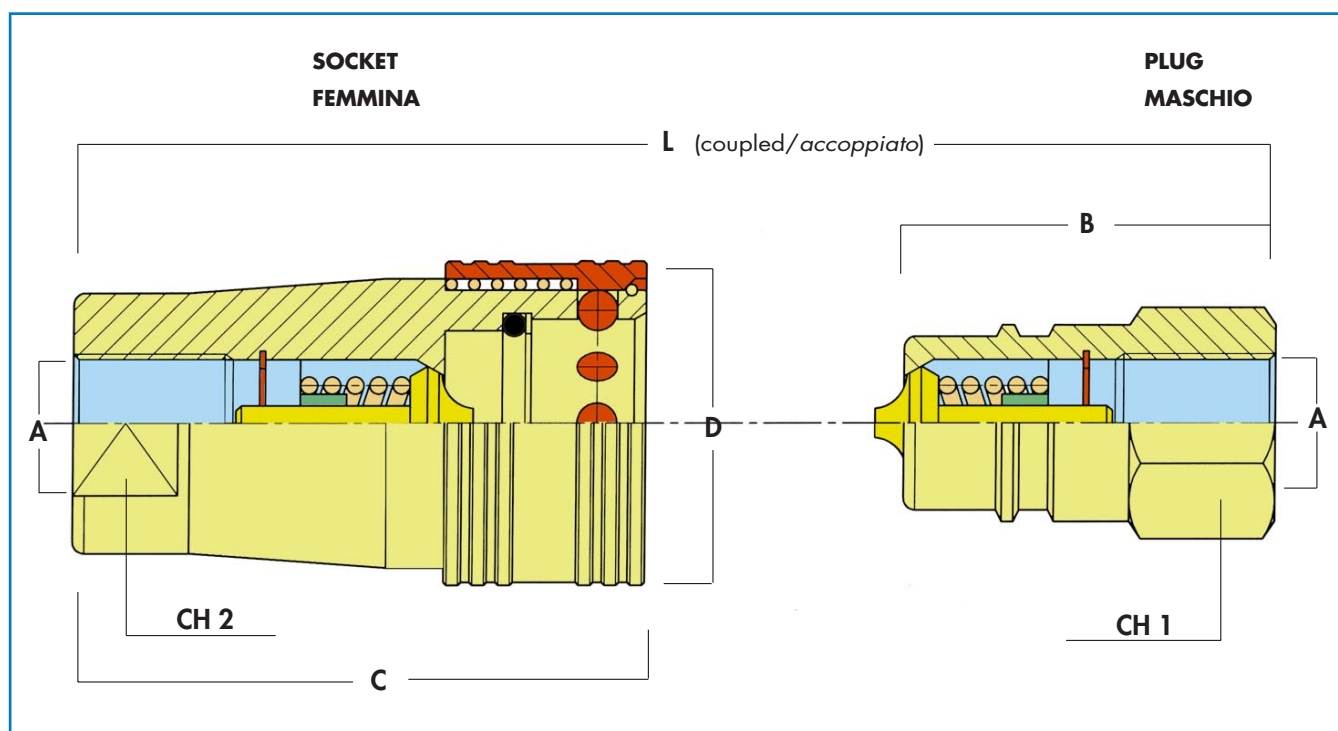

DIMENSIONS / DIMENSIONI

SIZE BASE	Ø DN		CODE / CODICE		ØA *	B		C		ØD		L		Ch1		Ch2	
	mm	inch	PLUG MASCHIO	SOCKET FEMMINA		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
20	32	1.1/4"	EM10-20	EF10-20	1.1/4"BSP	70,0	2.76	110	4.33	70,0	2.75	140	5.51	50	1.97	50	1.97
			EM15-20	EF15-20	1.1/4"NPTF												
24	38	1.1/2"	EM10-24	EF10-24	1.1/2"BSP	70,0	2.76	114	4.49	81,0	3.18	141	5.55	60	2.36	55	2.17
			EM15-24	EF15-24	1.1/2"NPTF												
32	50	2"	EM10-32	EF10-32	2"BSP	89,0	3.50	139	5.47	114,0	4.49	177	6.97	70	2.76	70	2.76
			EM15-32	EF15-32	2"NPTF												
40	63	2.1/2"	EM10-40	EF10-40	2.1/2"BSP	89,0	3.50	139	5.47	114,0	4.49	177	6.97	84	3.30	84	3.30
			EM15-40	EF15-40	2.1/2"NPTF												
50	76	3"	EM10-50	EF10-50	3"BSP	100,0	3.94	155	6.10	139,0	5.47	200	7.87	100	3.94	100	3.94
			EM15-50	EF15-50	3"NPTF												

* Other threads available on request
Ulteriori filettature disponibili a richiesta

MAIN DATA:

Series E includes large diameter couplings which find their ideal application in medium pressure hydraulic and industrial applications.

- Standard material: steel
- Plugs treated with induction hardening
- Internal valves in hardened steel
- Standard seals in nitril rubber
- Working temperature: -20° c/+110° C

On request:

- Special seals: Viton, EPDM, Neoprene
- Free flow version
- Brass version


CARATTERISTICHE PRINCIPALI:

La serie E comprende innesti di grosso diametro che trovano utilizzo ideale in applicazioni a media pressione nei settori oleodinamico e industriale.

- Materiale standard: acciaio
- Parte maschio in acciaio temprato ad induzione
- Valvole interne in acciaio
- Guarnizione standard in gomma nitrilica
- Temperature di esercizio: con guarnizioni standard -20 C°/+110 C°
- Guarnizioni speciali a richiesta: Viton, EPDM, Neoprene


A richiesta:

- Versioni a passaggio libero
- Versioni in ottone

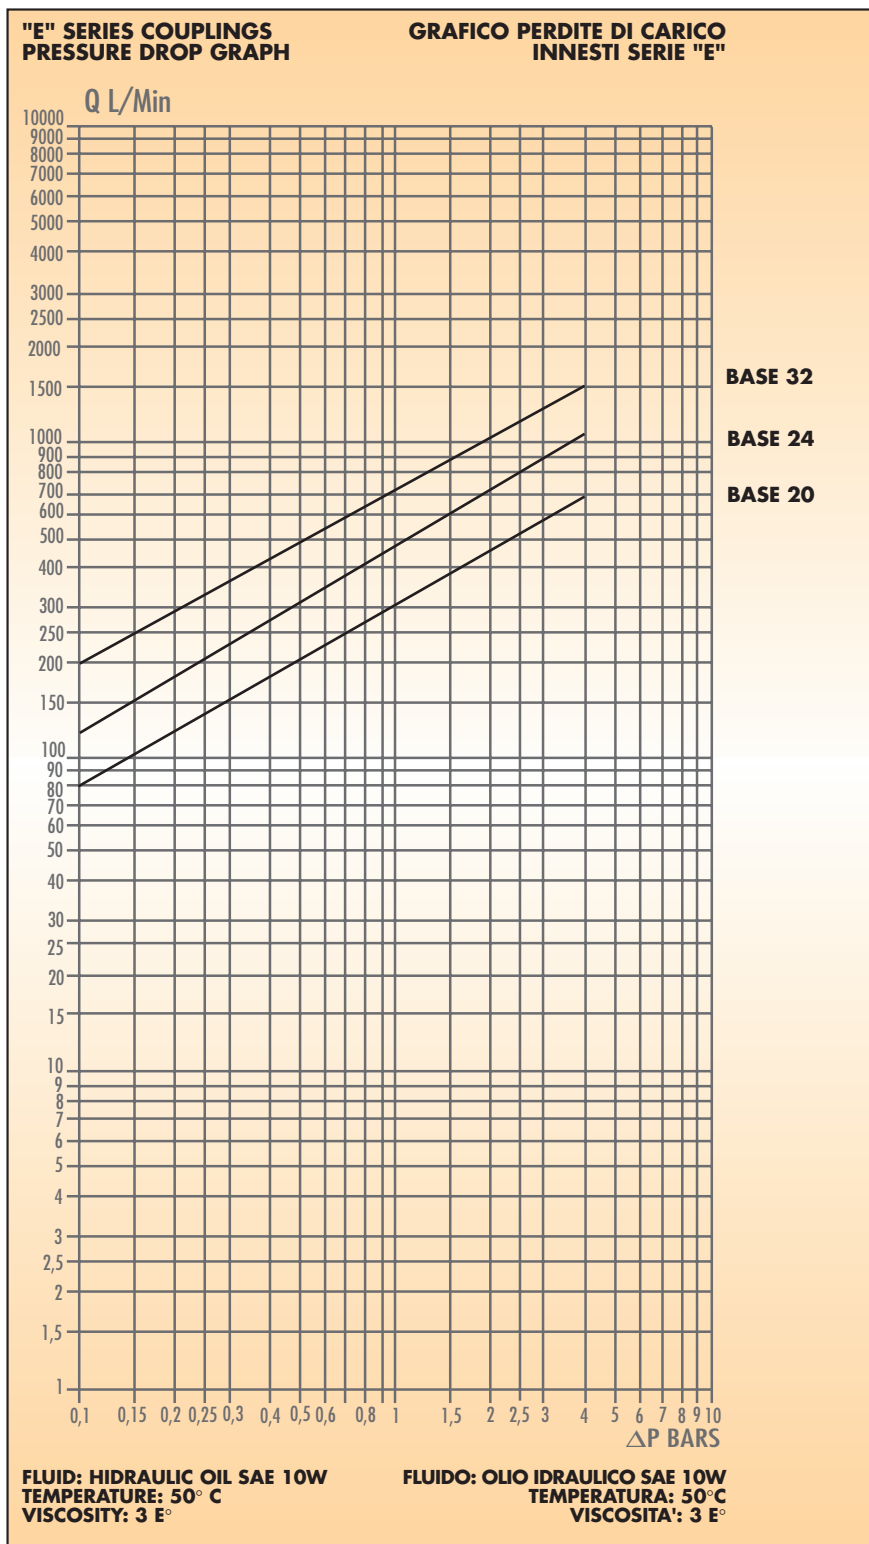

PERFORMANCES / PRESTAZIONI

SIZE BASE	Ø DN		MAX. WORK PRESSURE MAX PRESSIONE ESERCIZIO		BURST PRESSURE PRESSIONE SCOPPIO		WEIGHT / PESO			
							PLUG / MASCHIO		SOCKET/FEMMINA	
	mm	inch	bar	psi	bar	psi	kg	lbs	kg	lbs
20	32	1.1/4"	140	2030	560	8120	0,46	1.02	1,38	3.07
24	38	1.1/2"	120	1740	480	6960	0,72	1.60	1,82	4.04
32	50	2"	120	1740	480	6960	2,02	4.49	4,42	9.82
40	63	2.1/2"	100	1450	400	5800	1,82	4.04	4,05	9.00
50	76	3"	70	1015	280	4060	3,23	7.17	7,00	15.50

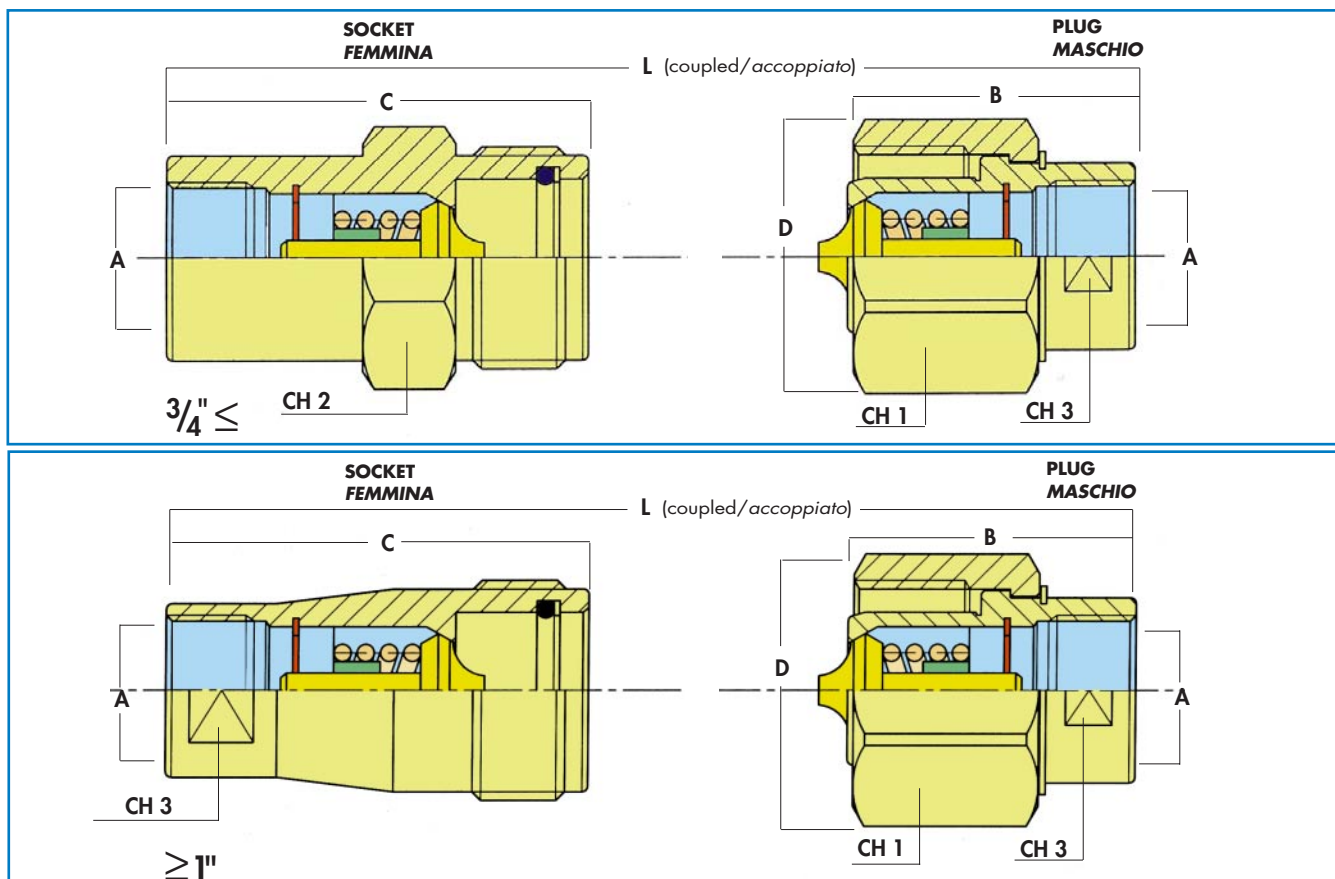

DIMENSIONS / DIMENSIONI

SIZE BASE	Ø DN		CODE / CODICE		ØA*	B		C		ØD		L		Ch1		Ch2		Ch3	
	mm	inch	PLUG MASCHIO	SOCKET FEMMINA		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
04	6	1/4"	SM10-04	SF10-04	1/4"BSP	36	1,42	50	1,97	31	1,22	69	2,72	28	1,10	24	0,94	16	0,63
			SM15-04	SF15-04	1/4"NPTF														
			SM18-04	SF18-04	1/4"BSPT														
06	10	3/8"	SM10-06	SF10-06	3/8"BSP	42	1,65	57	2,24	38	1,5	82	3,23	34	1,34	30	1,18	20	0,79
			SM15-06	SF15-06	3/8"NPTF														
			SM18-06	SF18-06	3/8"BSPT														
08	12	1/2"	SM10-08	SF10-08	1/2"BSP	55	2,17	75	2,95	47	1,85	100	3,94	42	1,65	38	1,50	27	1,06
			SM15-08	SF15-08	1/2"NPTF														
			SM18-08	SF18-08	1/2"BSPT														
12	20	3/4"	SM10-12	SF10-12	3/4"BSP	61	2,40	90	3,54	56	2,2	114	4,49	50	1,97	42	1,65	30	1,18
			SM15-12	SF15-12	3/4"NPTF														
			SM18-12	SF18-12	3/4"BSPT														
16	25	1"	SM10-16	SF10-16	1"BSP	61	2,40	88	3,46	67	2,64	120	4,72	60	2,36			40	1,57
			SM15-16	SF15-16	1"NPTF														
			SM18-16	SF18-16	1"BSPT														
20	32	1.1/4"	SM10-20	SF10-20	1.1/4"BSP	70	2,76	105	4,13	79	3,11	140	5,51	70	2,76			48	1,89
			SM15-20	SF15-20	1.1/4"NPTF														
			SM18-20	SF18-20	1.1/4"BSPT														
24	38	1.1/2"	SM10-24	SF10-24	1.1/2"BSP	70	2,76	105	4,13	90	3,54	140	5,51	80	3,15			52	2,05
			SM15-24	SF15-24	1.1/2"NPTF														
			SM18-24	SF18-24	1.1/2"BSPT														
32	50	2"	SM10-32	SF10-32	2"BSP	86	3,39	130	5,12	128	5,04	173	6,81	120	4,72			80	3,15
			SM15-32	SF15-32	2"NPTF														
			SM18-32	SF18-32	2"BSPT														
40	63	2.1/2"	SM10-40	SF10-40	2.1/2"BSP	86	3,39	130	5,12	128	5,04	173	6,81	120	4,72			85	3,35
			SM15-40	SF15-40	2.1/2"NPTF														
			SM18-40	SF18-40	2.1/2"BSPT														

* Other threads available on request
Ulteriori filettature disponibili a richiesta

MAIN DATA:

Series S is a screw to connect coupling range available in sizes from $\frac{1}{4}$ " to 2 $\frac{1}{2}$ ".

This series is used in heavy duty hydraulic and industrial applications in presence of high pressure, vibrations, mechanical stresses.

- Standard material: steel
- Internal valves in hardened steel
- Standard seals in nitril rubber
- Back-up seals in teflon
- Working temperature with standard seals: - 20°C/+110°C
- special seals on request: Viton, EPDM, Neoprene.

CARATTERISTICHE PRINCIPALI:


La serie S comprende innesti a vite in una gamma di dimensioni dal $\frac{1}{4}$ " to 2 $\frac{1}{2}$ ".

Si tratta di innesti particolarmente robusti, adatti alle piu' gravose applicazioni oleodinamiche e industriali. Questi innesti vengono di solito adottati in presenza di alte pressioni pulsanti, vibrazioni e altre forti sollecitazioni meccaniche.

- Materiale standard: acciaio
- Valvole interne in acciaio temprato
- Guarnizioni standard in gomma nitrilica
- Anelli antiestrusione in teflon
- Temperature d'esercizio con guarnizioni standard: - 20°C/+110°C
- Guarnizioni speciali a richiesta: Viton, EPDM, Neoprene.

"S" SERIES COUPLINGS
PRESSURE DROP GRAPH

GRAFICO PERDITE DI CARICO
INNESTI SERIE "S"

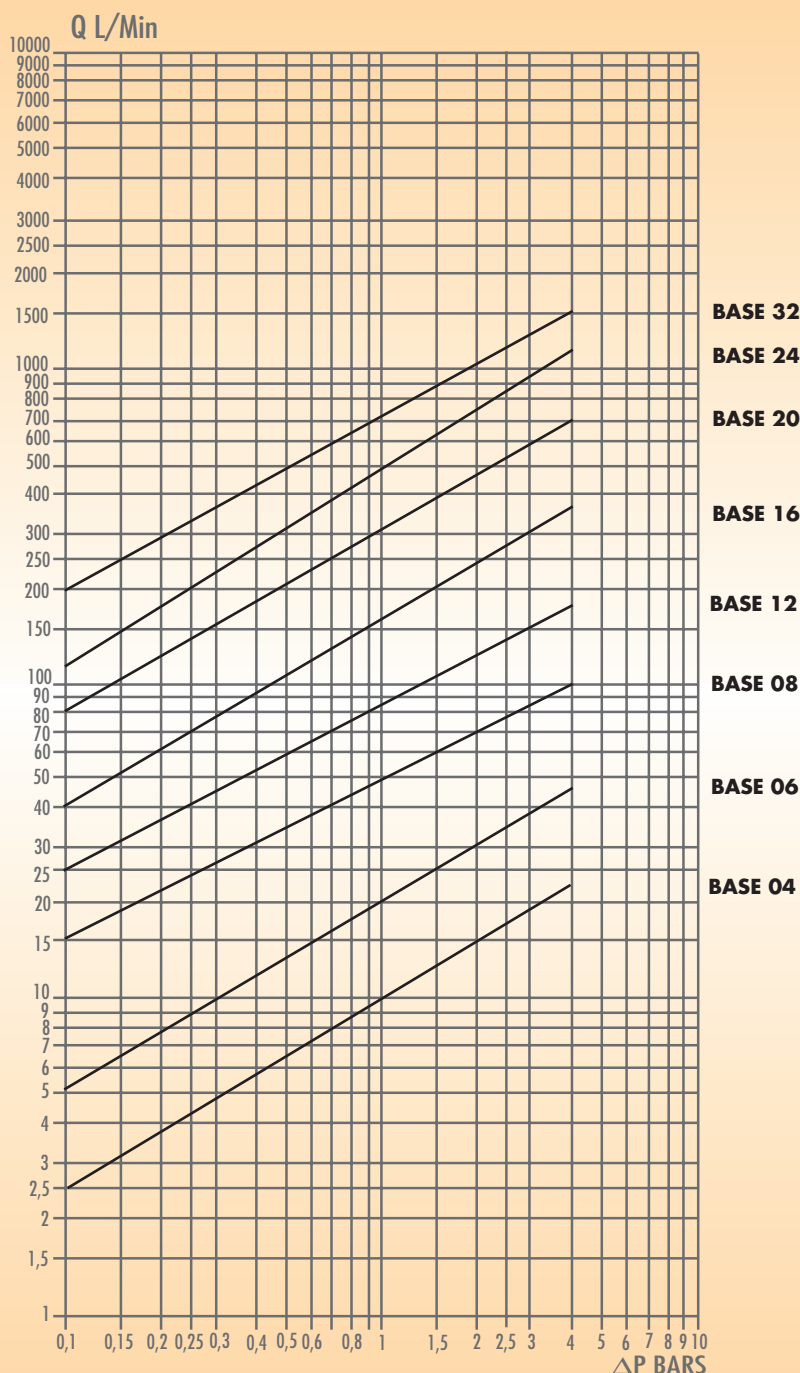


FLUID: HYDRAULIC OIL SAE 10W
TEMPERATURE: 50°C
VISCOSITY: 3 E°

FLUIDO: OLIO IDRAULICO SAE 10W
TEMPERATURA: 50°C
VISCOSITA': 3 E°

PERFORMANCES / PRESTAZIONI

SIZE BASE	Ø DN		MAX. WORK PRESSURE MAX PRESSIONE ESERCIZIO		BURST PRESSURE PRESSIONE SCOPPIO		WEIGHT / PESO			
	mm	inch	bar	psi	bar	psi	PLUG / MASCHIO		SOCKET / FEMMINA	
04	6	1/4"	500	7250	2000	29000	0,080	0.180	0,100	0.220
06	10	3/8"	450	6525	1800	26100	0,150	0.330	0,180	0.400
08	12	1/2"	400	5800	1600	23200	0,260	0.580	0,392	0.870
12	20	3/4"	350	5075	1400	20300	0,370	0.830	0,550	1.210
16	25	1"	300	4350	1200	17400	0,660	1.467	0,700	1.556
20	32	1.1/4"	250	3625	1000	14500	1,000	2.220	1,030	2.290
24	38	1.1/2"	220	3190	880	12760	1,350	3.000	1,200	2.670
32	50	2"	150	2175	600	8700	4,100	9.111	3,630	8.067
40	63	2.1/2"	120	1740	480	6960	3,640	8.080	3,300	7.330

SERIES J SERIE J

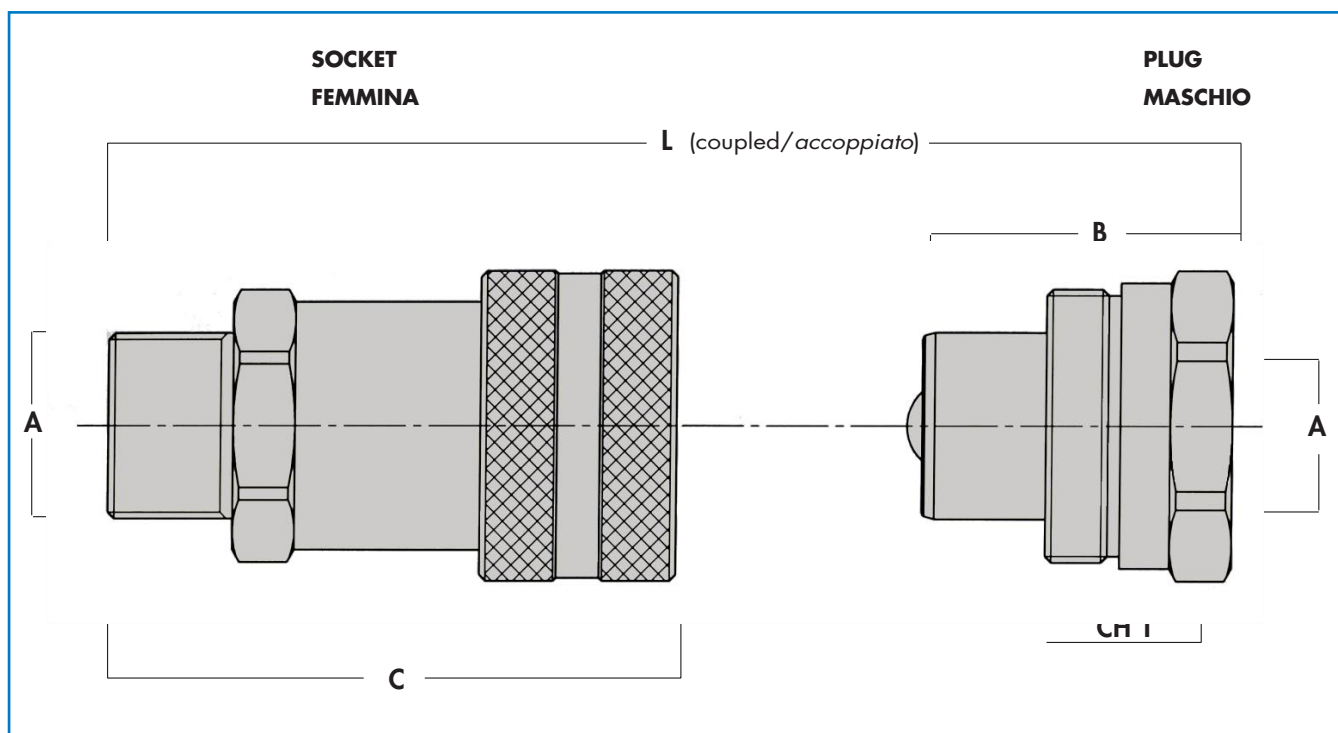

DIMENSIONS / DIMENSIONI

SIZE BASE	Ø DN		CODE/CODICE		ØA	B		C		ØD		L		Ch1		Ch2	
	mm	inch	PLUG MASCHIO	SOCKET FEMMINA		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
04	5	1/4"	JM25-04	JF25-04	1/4"NPT	32,5	1.28	60,8	2.39	28	1.10	74,5	2.93	19	0.75	22	0.87
06	7	1/4"	JMX25-04	JFX25-04	1/4"NPT	40	1.57	72,3	2.85	35	1.38	86,9	3.42	32	1.26	24	0.94
06	7	3/8"	JM25-06	JF25-06	3/8"NPT	40	1.57	72,3	2.85	35	1.38	86,9	3.42	32	1.26	24	0.94

PERFORMANCES / PRESTAZIONI

SIZE BASE	Ø DN		MAX.WORK PRESSURE MAX PRESSIONE ESERCIZIO		BURST PRESSURE* PRESSIONE SCOPPIO		WEIGHT / PESO			
	mm	inch	bar	psi	bar	psi	PLUG / MASCHIO		SOCKET/FEMMINA	
04	5	1/4"	700	10150	2200	31900	0,080	0.177	0,150	0.330
06	7	1/4"	700	10150	1850	26825	0,120	0.266	0,200	0.444
06	7	3/8"	700	10150	1850	26825	0,120	0.266	0,200	0.444

* Coupled / Innesto accoppiato

MAIN DATA:

J Series includes screw to connect couplings designed to match the very high pressures used for hydraulic tools.


- Screw to connect
- Material: steel
- Ball valve
- Silver colour zinc passivation
- Standard seals in nitril rubber
- Back - up seals in teflon
- Working temperature with standard seals: - 20° C / +110° C
- Metal caps on request

CARATTERISTICHE PRINCIPALI:

La serie J comprende innesti a vite per le altissime pressioni tipicamente utilizzate negli utensili idraulici.

- Meccanismo di innesto a vite
- Materiale: acciaio
- Valvola a sfera
- Zincatura bianca
- Guarnizioni standard in gomma nitrilica
- Anelli antiestrusione in teflon
- Temperature esercizio con guarnizioni standard: -20° C / + 110° C
- Tappi di metallo disponibili su richiesta

SERIES PW SERIE PW

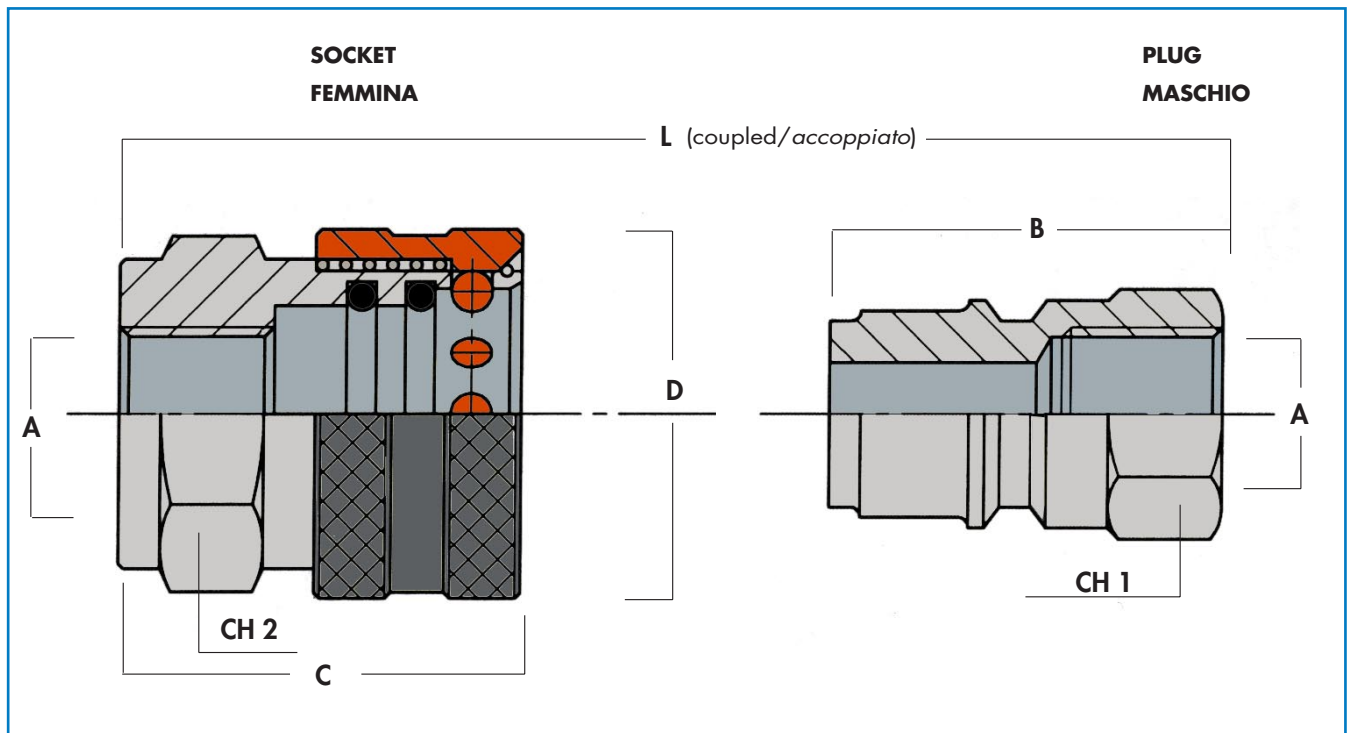

DIMENSIONS / DIMENSIONI

SIZE BASE	Ø DN		CODE / CODICE		Ø A *	B		C		Ø D		L		Ch1		Ch2	
	mm	inch	PLUG MASCHIO	SOCKET FEMMINA		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
06	10	3/8"	PWM00-06	PWF00-06	3/8"BSP	38	1,50	39	1,54	35	1,38	53,5	2,11	22	0,87	30	1,18

PERFORMANCES / PRESTAZIONI

SIZE BASE	Ø DN		MAX.WORK PRESSURE MAX PRESSIONE ESERCIZIO		BURST PRESSURE PRESSIONE SCOPPIO		WEIGHT / PESO			
	mm	inch	bar	psi	bar	psi	PLUG / MASCHIO		SOCKET/FEMMINA	
06	10	3/8"	250	3600	625	9000	0,020	0.04	0,070	0.16

MAIN DATA:

Series PW includes free flow couplings for water, steam and other media used in industrial applications.


- Socket in chromed plated brass
- Locking sleeve in steel treated with Q.P.Q.
- Plug in hardened steel
- Two viton seals
- Working temperature with standard seals: - 15° C/+180° C.
- Specials seals on request.

CARATTERISTICHE PRINCIPALI:

La Serie PW comprende innesti a passaggio libero per acqua, vapore e altri fluidi usati nel settore industriale.

- Corpo femmina in ottone cromato
- Ghiera di ritenzione in acciaio trattato con Q.P.Q.
- Maschio in acciaio temprato ad induzione
- Doppia guarnizione in viton
- Temperature d'esercizio: -15 C°/+180 C°
- Guarnizioni speciali a richiesta

SERIES F SERIE F

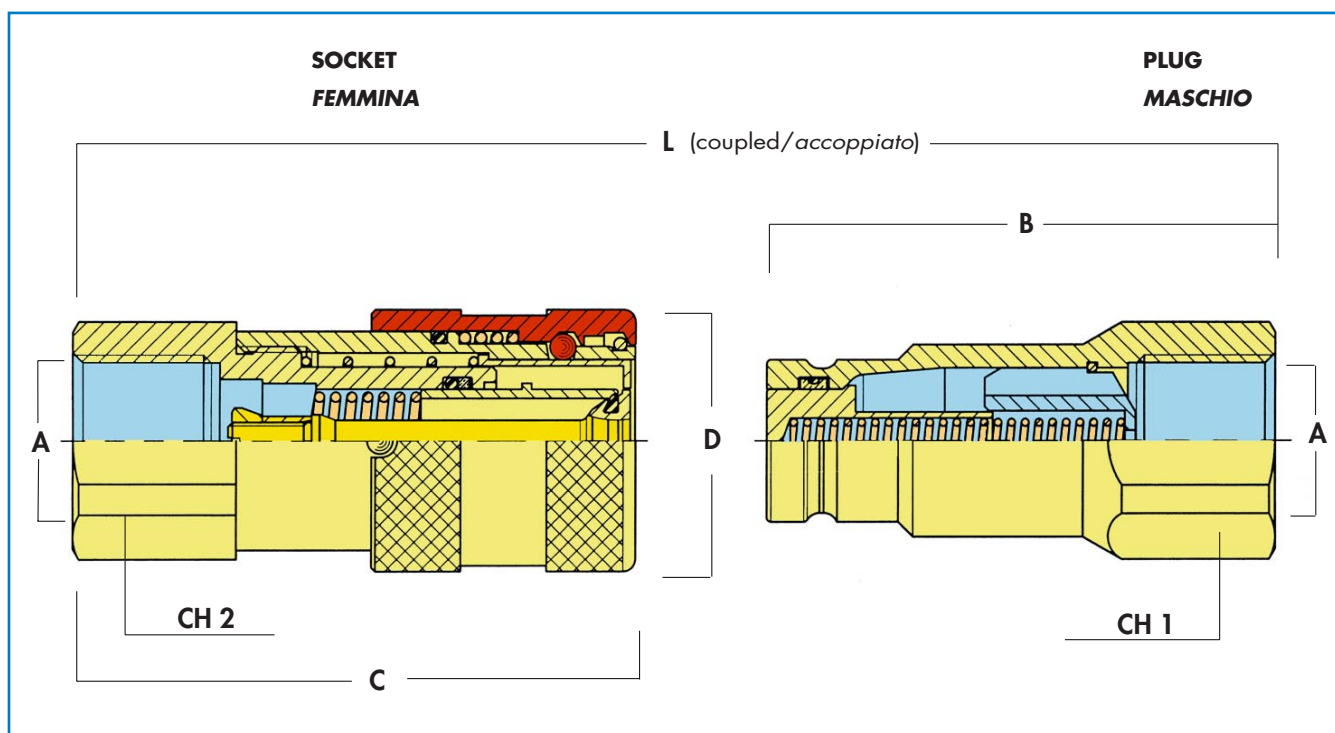

DIMENSIONS / DIMENSIONI

SIZE BASE	Ø DN mm	CODE / CODICE		ØA*	B		C		ØD		L		Ch1		Ch2	
		PLUG MASCHIO	SOCKET FEMMINA		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
04	7	FM10-04	FF10-04	1/4" BSP	48,0	1.89	48,0	1.89	28	1.10	85,5	3.37	22	0.87	22	0.87
		FM15-04	FF15-04	1/4" NPTF												
		FM18-04	FF18-04	1/4" BSPT												
06	9	FM10-06	FF10-06	3/8" BSP	60,0	2.36	64,5	2.54	32	1.26	109	4.29	24	0.94	27	1.06
		FM15-06	FF15-06	3/8" NPTF												
		FM18-06	FF18-06	3/8" BSPT												
06	9	FM10-08	FF10-08	1/2" BSP	62,5	2.46	69,5	2.74	32	1.26	117	4.59	27	1.06	27	1.06
		FM15-08	FF15-08	1/2" NPTF												
		FM18-08	FF18-08	1/2" BSPT												
08	13	FM20-08	FF20-08	1/2" BSP	68,0	2.68	73,5	2.89	38	1.50	125	4.92	32	1.26	32	1.26
		FM25-08	FF25-08	1/2" NPTF												
		FM28-08	FF28-08	1/2" BSPT												
08	13	FM10-12	FF10-12	3/4" BSP	70,5	2.78	80,5	3.17	38	1.50	135	5.30	36	1.42	36	1.42
		FM15-12	FF15-12	3/4" NPTF												
		FM18-12	FF18-12	3/4" BSPT												
12	15	FM20-12	FF20-12	3/4" BSP	70,5	2.78	78,0	3.07	42	1.65	132	5.20	36	1.42	36	1.42
		FM25-12	FF25-12	3/4" NPTF												
		FM28-12	FF28-12	3/4" BSPT												
16	17	FM10-16	FF10-16	1" BSP	82,5	3.25	92,5	3.64	48	1.89	154	6.06	45	1.77	45	1.77
		FM15-16	FF15-16	1" NPTF												
		FM18-16	FF18-16	1" BSPT												
20	21	FM10-20	FF10-20	1.1/4" BSP	90,0	3.54	105,0	4.13	55	2.17	173	6.81	55	2.17	55	2.17
		FM15-20	FF15-20	1.1/4" NPTF												
		FM18-20	FF18-20	1.1/4" BSPT												
24	30	FM10-24	FF10-24	1.1/2" BSP	111,0	4.37	133,0	5.22	80	3.15	215	8.46	70	2.76	65	2.56
		FM15-24	FF15-24	1.1/2" NPTF												
		FM18-24	FF18-24	1.1/2" BSPT												
32	45	FM10-32	FF10-32	2" BSP	125,0	4.92	165,0	6.50	100	3.94	250	9.84	75	2.95	80	3.15
		FM15-32	FF15-32	2" NPTF												
		FM18-32	FF18-32	2" BSPT												

* Other threads available on request
Ulteriori filettature disponibili a richiesta

MAIN DATA:

Series F flat face couplings are adopted on the most diversified hydraulic and industrial applications. The F series flat face design offers important technical advantages:

- Perfect sealing of plug and socket both when coupled and uncoupled.
- Extremely low spillage during connection and disconnection.
- No inclusion of air or external media during connection and disconnection.
- The flat faces are easy to clean.
- Sleeve with a safety device preventing from accidental disconnection
- Standard seals in nitril rubber
- Antiextrusion ring in teflon
- Working temperature with standard seals: -20° C/ +110° C.
- Body size $\frac{3}{8}$ (DN 9) is interchangeable according to HTMA design
- Special seals on request: Viton and EPDM


CARATTERISTICHE PRINCIPALI:

Gli innesti a facce piane serie F trovano applicazione in molti settori oleodinamici e industriali, offrendo tutti i vantaggi tipici di questo concetto costruttivo:

- Tenuta totale con innesti separati e accoppiati
- Perdite di fluido bassissime nelle fasi di accoppiamento e sgancio.
- Nessuna intrusione di agenti esterni durante le connessioni
- Facile pulizia delle superfici di accoppiamento
- Ghiera con sistema anti-sgancio
- Guarnizioni standard in gomma nitrilica
- Anelli antiestrusione in teflon
- Temperature d'esercizio con guarnizioni standard: -20°C/ +110°C
- Misura $\frac{3}{8}$ (DN 9) intercambiabile secondo norme HTMA
- Guarnizioni speciali a richiesta: Viton e EPDM

"F" SERIES COUPLINGS
PRESSURE DROP GRAPH

GRAFICO PERDITE DI CARICO
INNESTI SERIE "F"

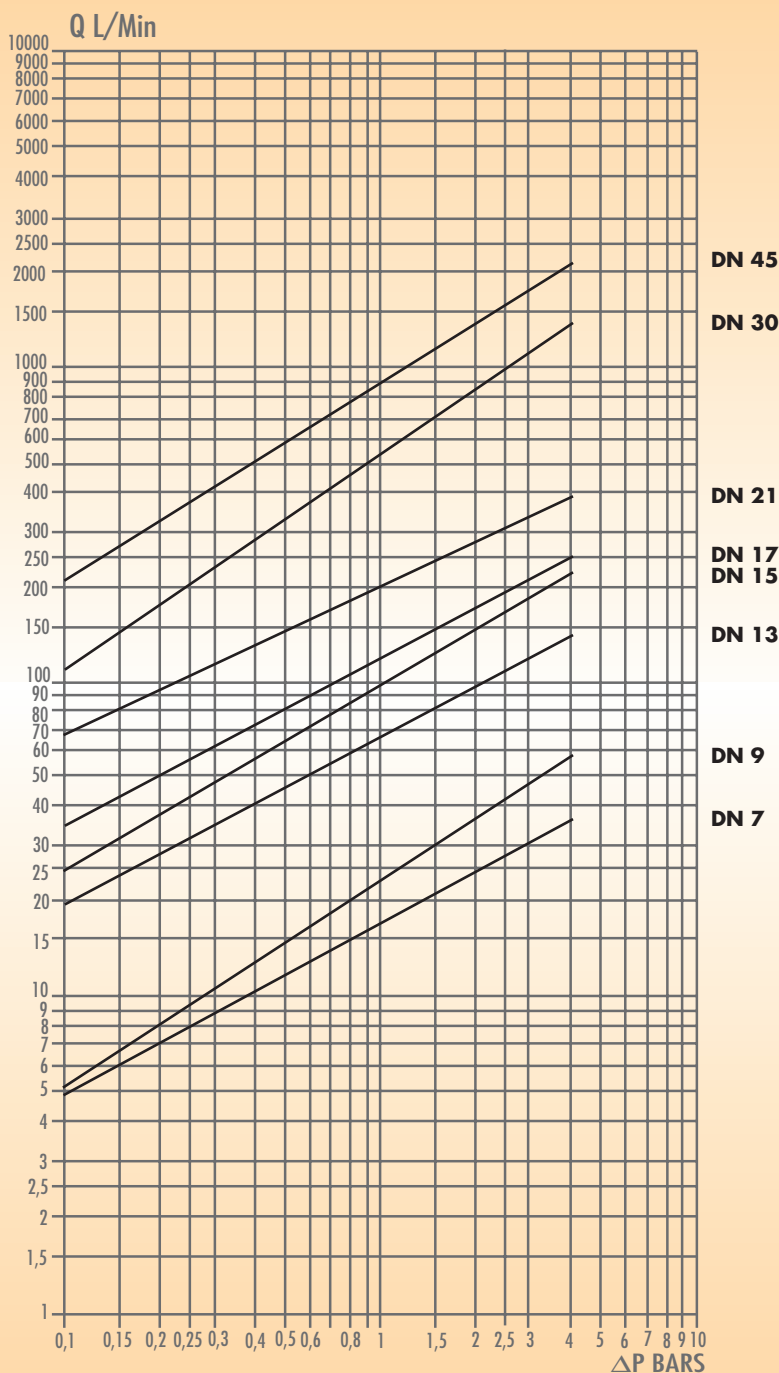


FLUID: HIDRAULIC OIL SAE 10W
TEMPERATURE: 50° C
VISCOSITY: 3 E°

FLUIDO: OLIO IDRAULICO SAE 10W
TEMPERATURA: 50° C
VISCOSITA': 3 E°

PERFORMANCES / PRESTAZIONI

SIZE BASE	Ø DN	MAX.WORK PRESSURE		MIN. BURST PRESSURE / PRESSIONE SCOPPIO						WEIGHT / PESO				FORCE TO CONNECT FORZA AGGANCIO	
				COUPLED/ACCOPIATO		PLUG/MASCHIO		SOCKET/FEMMINA		PLUG/MASCHIO		SOCKET/FEMMINA			
	mm	bar	psi	bar	psi	bar	psi	bar	psi	kg	lbs	kg	lbs	kg	lbs
04	7	300	4350	1200	17400	1200	17400	600	8700	0,045	0.100	0,080	0,18	18	40.00
06	9	300	4350	1200	17400	1200	17400	600	8700	0,055	0.122	0,150	0,33	17	37.78
06	9	300	4350	1200	17400	1200	17400	600	8700	0,090	0.200	0,270	0,60	17	37.78
08	13	250	3625	1000	14500	1000	14500	400	5800	0,090	0.200	0,270	0,60	18	40.00
08	13	250	3625	1000	14500	1000	14500	400	5800	0,185	0.410	0,465	1,03	18	40.00
12	15	250	3625	1000	14500	900	13050	450	6525	0,185	0.410	0,465	1,03	20	44.44
16	17	250	3625	850	12325	920	13340	550	7975	0,270	0.600	0,720	1,60	25	55.56
20	21	250	3625	850	12325	920	13340	470	6815	0,600	1.330	1,250	2,78	31	68.89
24	30	200	2900	700	10150	700	10150	300	4350	0,900	2.000	2,100	4,67	43	95.56
32	45	180	2610	700	10150	700	10150	500	7250	1.450	3.220	4.150	9.22	50	111.11

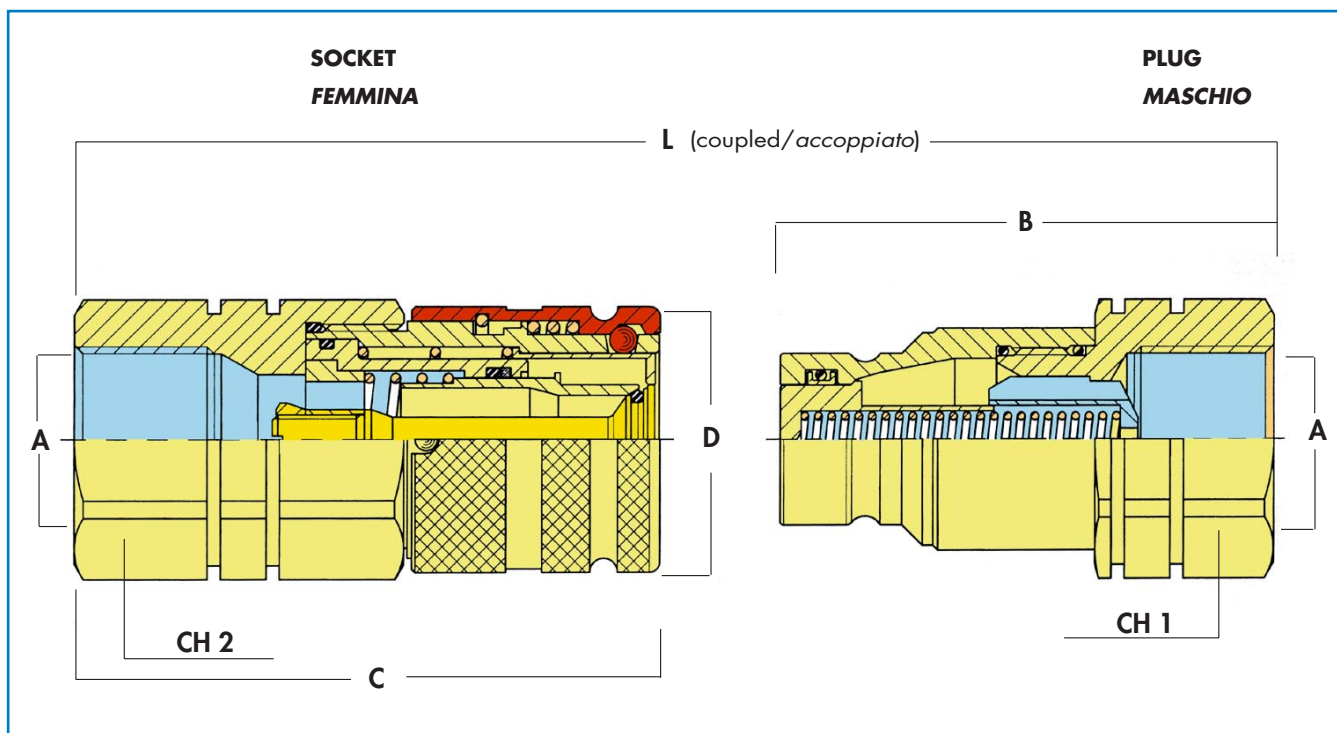

DIMENSIONS / DIMENSIONI

SIZE BASE	Ø DN mm	CODE / CODICE		ØA*	B		C		ØD		L		Ch1		Ch2	
		PLUG MASCHIO	SOCKET FEMMINA		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
02	4	FAM 10-02	FAF 10-02	1/8"BSP	36,5	1.44	40,0	1.57	20	0.79	68,5	2.70	17	0.67	19	0.75
		FAM 15-02	FAF 15-02	1/8"NPTF												
		FAM 18-02	FAF 18-02	1/8"BSPT												
04	7	FAM 10-04	FAF 10-04	1/4"BSP	48,0	1.89	53,0	2.09	28	1.10	90,5	3.56	22	0.87	27	1.06
		FAM 15-04	FAF 15-04	1/4"NPTF												
		FAM 18-04	FAF 18-04	1/4"BSPT												
06	9	FAM 10-06	FAF 10-06	3/8"BSP	60,0	2.36	64,5	2.54	32	1.26	109,0	4.29	27	1.06	30	1.18
		FAM 15-06	FAF 15-06	3/8"NPTF												
		FAM 18-06	FAF 18-06	3/8"BSPT												
06	9	FAM 10-08	FAF 10-08	1/2"BSP	62,5	2.46	69,5	2.74	32	1.26	116,5	4.59	27	1.06	30	1.18
		FAM 15-08	FAF 15-08	1/2"NPTF												
		FAM 18-08	FAF 18-08	1/2"BSPT												
08	13	FAM 20-08	FAF 20-08	1/2"BSP	68,0	2.68	76,5	3.01	38	1.50	127,5	5.02	36	1.42	36	1.42
		FAM 25-08	FAF 25-08	1/2"NPTF												
		FAM 28-08	FAF 28-08	1/2"BSPT												
08	13	FAM 10-12	FAF 10-12	3/4"BSP	70,5	2.78	83,5	3.29	38	1.50	137,0	4.39	36	1.42	36	1.42
		FAM 15-12	FAF 15-12	3/4"NPTF												
		FAM 18-12	FAF 18-12	3/4"BSPT												
12	15	FAM 20-12	FAF 20-12	3/4"BSP	73,0	2.87	83,5	3.29	42	1.65	139,5	5.49	36	1.42	41	1.61
		FAM 25-12	FAF 25-12	3/4"NPTF												
		FAM 28-12	FAF 28-12	3/4"BSPT												
16	17	FAM 10-16	FAF 10-16	1"BSP	84,0	3.31	98,5	3.88	48	1.89	161,0	6.34	46	1.81	46	1.81
		FAM 15-16	FAF 15-16	1"NPTF												
		FAM 18-16	FAF 18-16	1"BSPT												
20	21	FAM 10-20	FAF 10-20	1.1/4"BSP	90,0	3.54	105,0	4.13	55	2.17	173,0	6.81	55	2.17	55	2.17
		FAM 15-20	FAF 15-20	1.1/4"NPTF												
		FAM 18-20	FAF 18-20	1.1/4"BSPT												
24	30	FAM 10-24	FAF 10-24	1.1/2"BSP	111,0	4.37	132,5	5.22	80	3.15	215,0	8.46	65	2.56	65	2.56
		FAM 15-24	FAF 15-24	1.1/2"NPTF												
		FAM 18-24	FAF 18-24	1.1/2"BSPT												

* Other threads available on request
Ulteriori filettature disponibili a richiesta

MAIN DATA:

Series FA flat face couplings are dimensionally interchangeable with our F series but allow higher pressures. The FA series performances make this range the ideal solution for heavy duty mobile applications where high working pressure and peak pressures are associated to difficult environmental working conditions.

- Perfect sealing of plug and socket both when coupled and uncoupled.
- Extremely low spillage during connection and disconnection.
- No inclusion of air or external media during connection and disconnection.
- The flat faces are easy to clean.
- Sleeve with a safety device preventing from accidental disconnection
- Standard seals in nitril rubber
- Antiextrusion ring in teflon
- Working temperature with standard seals: -20° C/ +110° C.
- Body size 3/8" (DN 9) is interchangeable according to HTMA design
- Special seals on request: Viton and EPDM
- FPM plug is a special version allowing connection by hand with back pressure up to 200 bar. Available in sizes 1/4" to 1".


CARATTERISTICHE PRINCIPALI:

Gli innesti serie FA sono una evoluzione tecnica della serie F della quale mantengono la intercambiabilità dimensionale. Le soluzioni tecniche adottate permettono pressioni d'esercizio particolarmente elevate che rendono possibile l'adozione di questi innesti in applicazioni caratterizzate da piccoli pressori, forti sollecitazioni meccaniche e condizioni di lavoro esasperate.

- Tenuta totale con innesti separati e accoppiati
- Perdite di fluido bassissime nelle fasi di accoppiamento e sgancio.
- Nessuna intrusione di agenti esterni durante le connessioni
- Facile pulizia delle superfici di accoppiamento
- Ghiera con sistema anti-sgancio
- Guarnizioni standard in gomma nitrilica
- Anelli antiestrusione in teflon
- Temperature d'esercizio con guarnizioni standard: -20°C/+110°C
- Misura 3/8" (DN 9) intercambiabile secondo norme HTMA
- Guarnizioni speciali a richiesta: Viton e EPDM
- Il maschio speciale versione FPM permette la connessione manuale in presenza di pressioni residue fino a 200 bar. Disponibile nelle dimensioni da 1/4" al 1".

"FA" SERIES COUPLINGS
PRESSURE DROP GRAPH

GRAFICO PERDITE DI CARICO
INNESTI SERIE "FA"

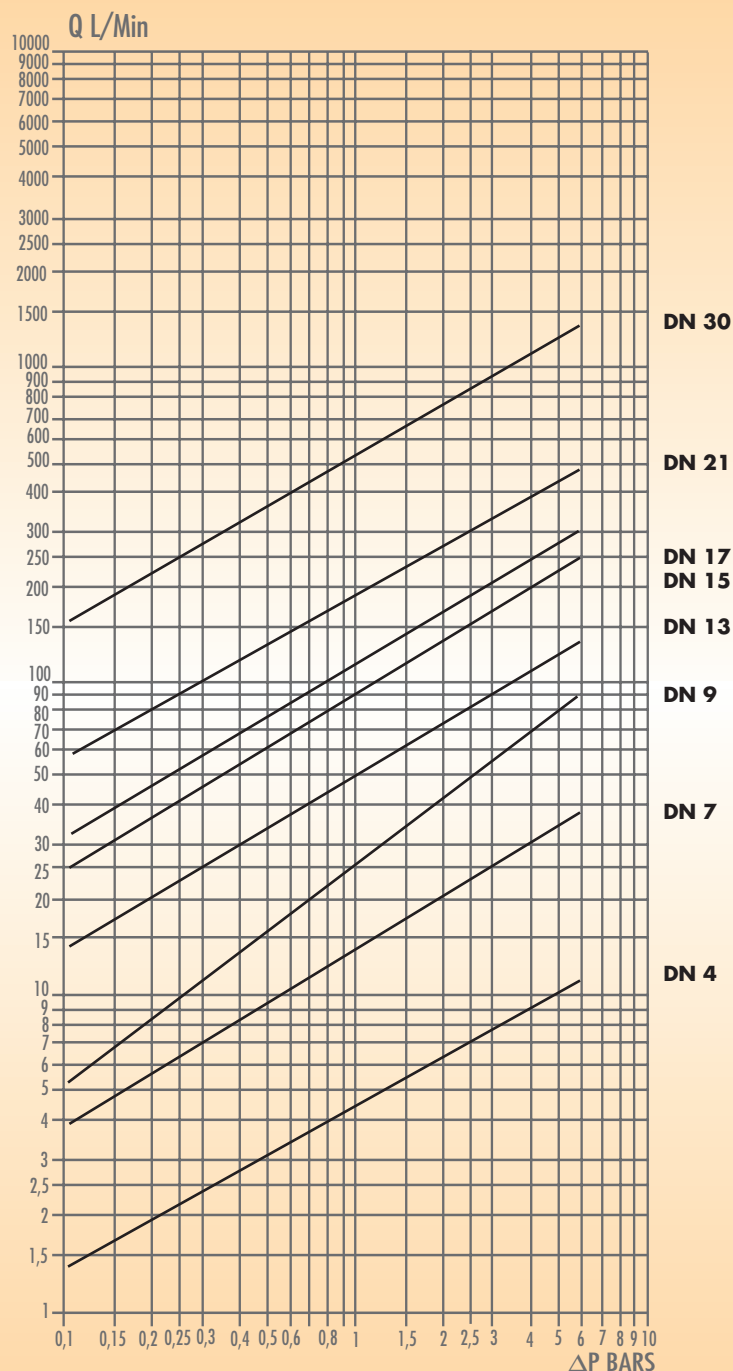

FLUID: IDRAULIC OIL SAE 10W
TEMPERATURE: 50° C
VISCOSITY: 3 E°


FLUIDO: OLIO IDRAULICO SAE 10W
TEMPERATURA: 50° C
VISCOSITA': 3 E°

PERFORMANCES / PRESTAZIONI

SIZE BASE	Ø DN mm	MAX.WORK PRESSURE MAX ESERCIZIO		MIN. BURST PRESSURE / PRESSIONE SCOPPIO						WEIGHT / PESO				FORCE TO CONNECT FORZA AGGANCIAMENTO	
		bar	psi	COUPLED/ACCOPIATO		PLUG/MASCHIO		SOCKET/FEMMINA		PLUG/MASCHIO		SOCKET/FEMMINA		kg	lbs
				bar	psi	bar	psi	bar	psi	kg	lbs	kg	lbs		
02	4	400	5800	1400	20300	1600	23200	1400	20300	0,027	0.06	0,083	0.180	15	33,333
04	7	400	5800	1200	17400	1200	17400	1100	15950	0,060	0.13	0,189	0.420	17	37,778
06	9	375	5438	1100	15950	1100	15950	1100	15950	0,148	0.32	0,257	0.570	21	46,667
06	9	375	5438	1100	15950	1100	15950	1100	15950	0,148	0.32	0,272	0.604	21	46,667
08	13	350	5075	1100	15950	1100	15950	1000	14500	0,273	0.60	0,452	1.000	23	51,111
08	13	350	5075	1100	15950	1100	15950	1000	14500	0,268	0.59	0,452	1.000	23	51,111
12	15	350	5075	1100	15950	1100	15950	900	13050	0,300	0.66	0,615	1.360	18	40,000
16	17	350	5075	1100	15950	1100	15950	900	13050	0,409	0.90	0,941	2.090	22	48,889
20	21	350	5075	1100	15950	1100	15950	800	11600	0,610	1.35	1,360	3.020	35	77,778
24	30	250	3625	1000	14500	1000	14500	800	11600	1,630	3.62	3,320	7.370	44	97,778

SERIES HP

SERIE HP

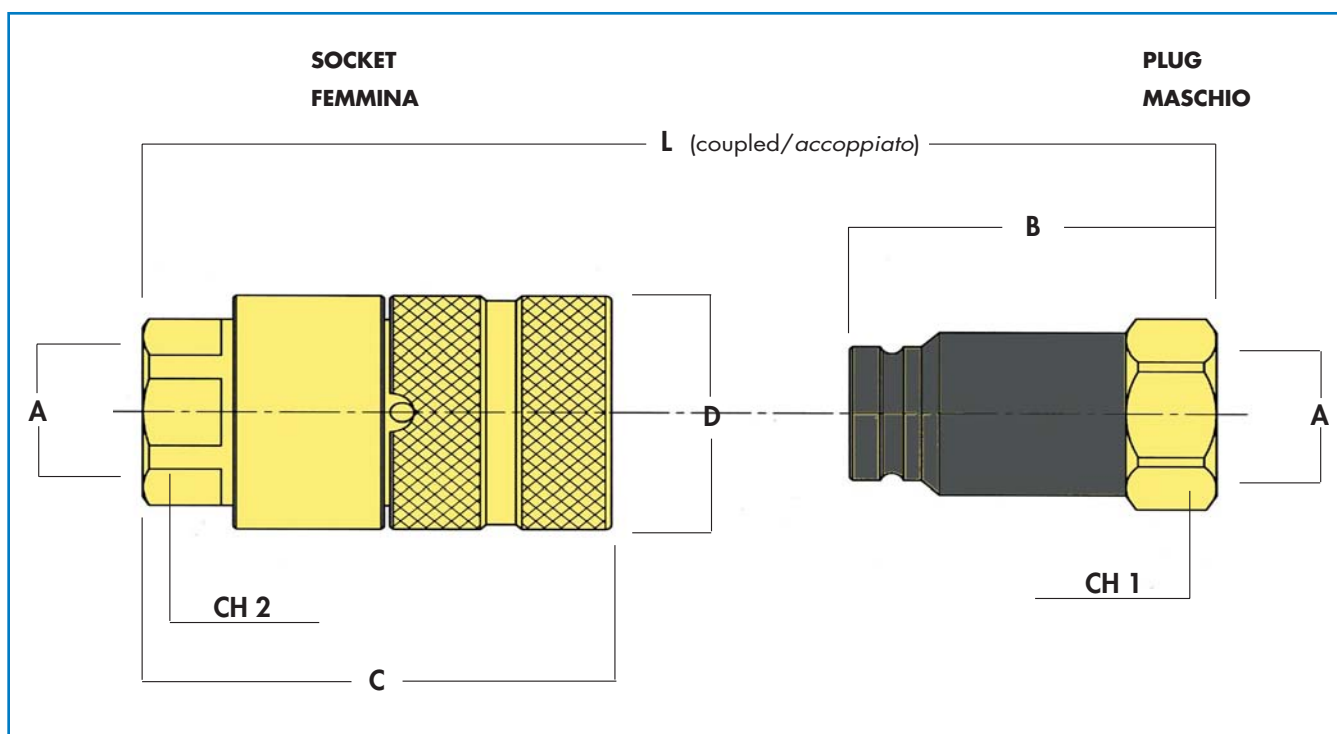

DIMENSIONS / DIMENSIONI

SIZE BASE	Ø DN		CODE / CODICE		ØA*	B		C		ØD		L		Ch1		Ch2	
	mm	inch	PLUG MASCHIO	SOCKET FEMMINA		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
04	5		HPM10-04	HPF10-04	1/4"BSP	48	1.89	58	2.28	29	1.14	95	3.74	22	0.87	22	0.87
			HPM15-04	HPF15-04	1/4"NPTF												
			HPM18-04	HPF18-04	1/4"BSPT												
04	5		HPM10-06	HPF10-06	3/8"BSP	50	1.97	60	2.36	29	1.14	99	3.90	24	0.94	24	0.94
			HPM15-06	HPF15-06	3/8"NPTF												
			HPM18-06	HPF18-06	3/8"BSPT												
06	8		HPM20-06	HPF20-06	3/8"BSP	61	2.40	70	2.76	34	1.34	114	4.49	27	1.06	30	1.18
			HPM25-06	HPF25-06	3/8"NPTF												
			HPM28-06	HPF28-06	3/8"BSPT												
06	8		HPM10-08	HPF10-08	1/2"BSP	63	2.48	76	2.99	34	1.34	122	4.80	27	1.06	30	1.18
			HPM15-08	HPF15-08	1/2"NPTF												
			HPM18-08	HPF18-08	1/2"BSPT												

* Other threads available on request
Ulteriori filettature disponibili a richiesta

MAIN DATA:


Series HP include flat face couplings designed for the very high pressures typical of hydraulic tools and power-packs (720 bar/10.000 psi).

- Perfect sealing of plug and socket both when coupled and uncoupled.
- Extremely low spillage during connection and disconnection.
- No inclusion of air or external media during connection and disconnection.
- The flat faces are easy to clean.
- Sleeve with a safety device preventing from accidental disconnection
- Standard seals in nitril rubber
- Antiextrusion ring in teflon
- Working temperature with standard seals: -20° C/ +110° C.
- Special seals on request.

CARATTERISTICHE PRINCIPALI:

La serie HP comprende gli innesti a facce piane sviluppati per altissime pressioni (fino a 720 bar). Questi innesti vengono tipicamente utilizzati per utensili e centraline idrauliche.

- Tenuta totale con innesti separati e accoppiati
- Perdite di fluido bassissime nelle fasi di accoppiamento e sgancio.
- Nessuna intrusione di agenti esterni durante le connessioni
- Facile pulizia delle superfici di accoppiamento
- Ghiera con sistema anti-sgancio
- Guarnizioni standard in gomma nitrilica
- Anelli antiestrusione in teflon
- Temperature d'esercizio con guarnizioni standard: -20°C/+110°C
- Guarnizioni speciali a richiesta.

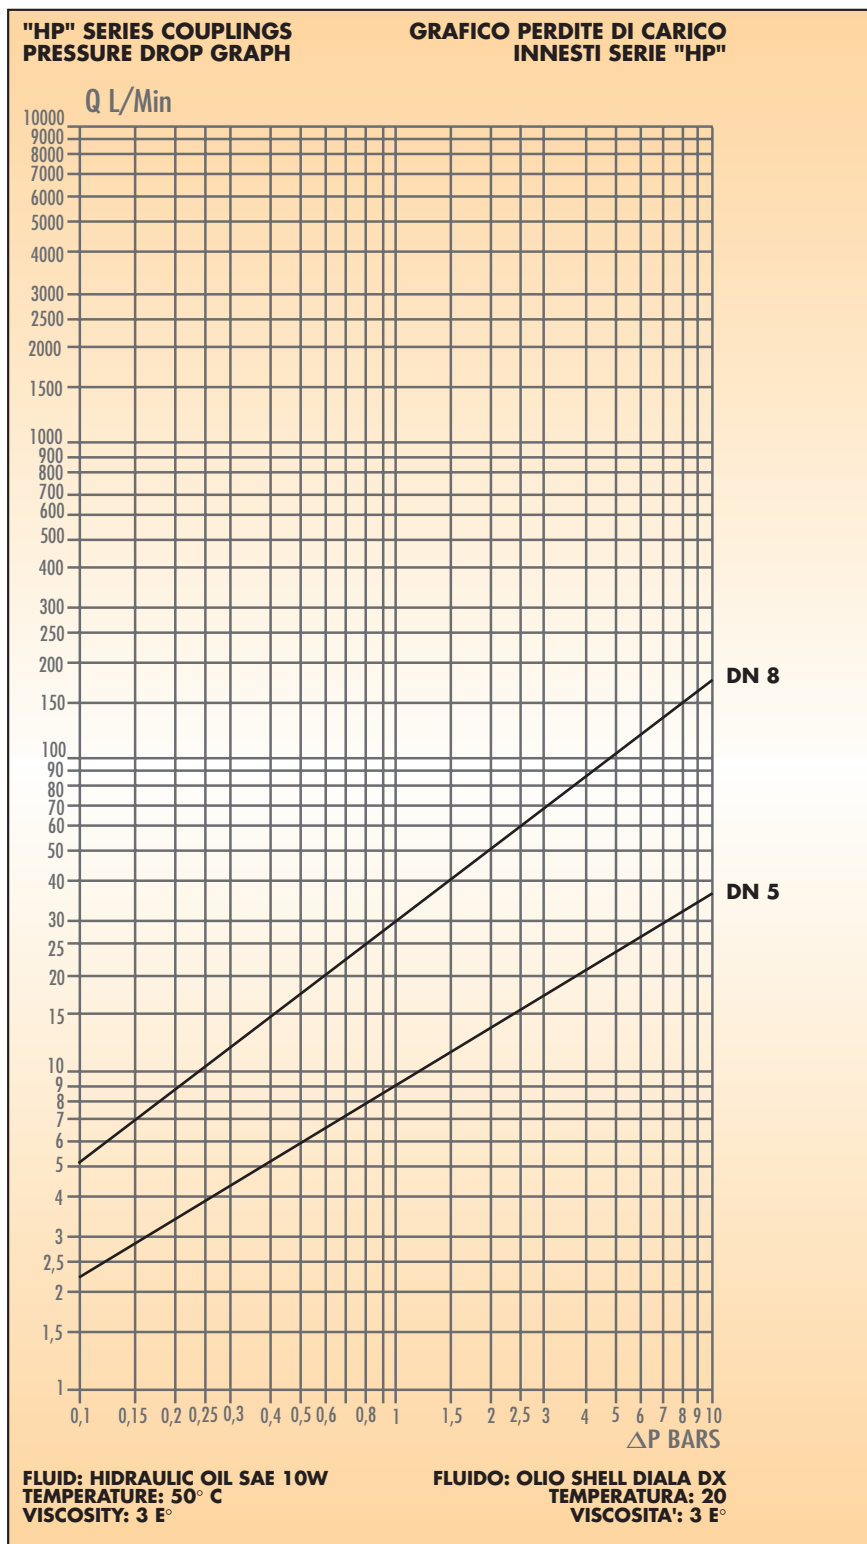


PERFORMANCES / PRESTAZIONI

SIZE BASE	Ø DN	MAX.WORK PRESSURE		MIN. BURST PRESSURE / PRESSIONE SCOPPIO						WEIGHT / PESO				FORCE TO CONNECT FORZA AGGANCIAMENTO	
				COUPLED/ACCOPPIATO		PLUG/MASCHIO		SOCKET/FEMMINA		PLUG/MASCHIO		SOCKET/FEMMINA			
	mm	bar	psi	bar	psi	bar	psi	bar	psi	kg	lbs	kg	lbs	kg	lbs
04	5	720	10440	1800	26100	2000	29000	1800	26100	0,075	0.166	0,225	0.500	15	33.33
04	5	720	10440	1800	26100	2000	29000	1800	26100	0,080	0.177	0,240	0.530	15	33.33
06	8	720	10440	1500	21750	2000	29000	1500	21750	0,115	0.255	0,345	0.766	16	35.56
06	8	720	10440	1500	21750	2000	29000	1500	21750	0.120	0.266	0.360	0.800	16	35.56

SERIES VP SERIE VP

Screw to connect flat face coupling
Innesto a vite a facce piane

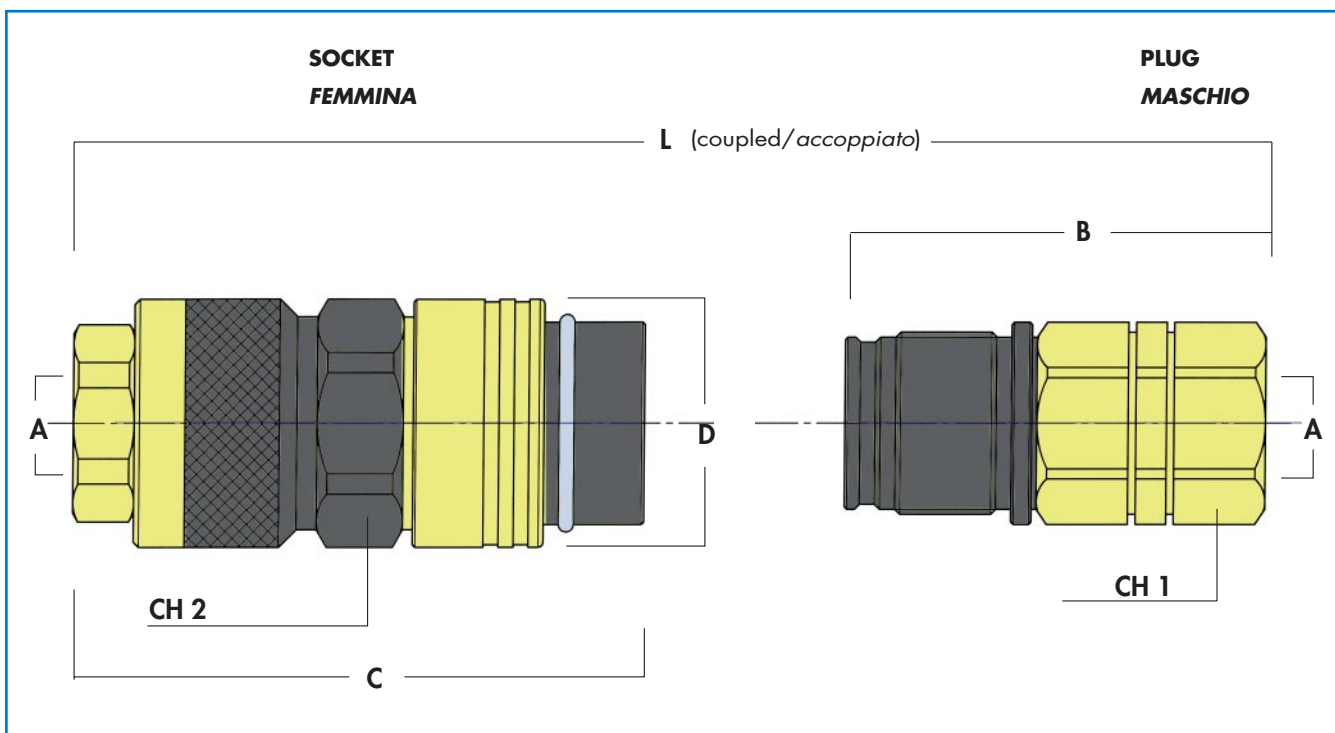

DIMENSIONS / DIMENSIONI

SIZE BASE	Ø DN*	CODE / CODICE		Ø A	B		C		Ø D		L		M	Ch1		Ch2	
		PLUG MASCHIO	SOCKET FEMMINA		mm	in	mm	in	mm	in	mm	in		mm	in	mm	in
04	7	VPM10-04	VPF10-04	1/4" BSP	53,0	2.09	84,0	3.31	35	1.38	125,5	4.94	M24X2	27	1.06	32	1.26
		VPM15-04	VPF15-04	1/4" NPTF													
		VPM18-04	VPF18-04	1/4" BSPT													
06	9	VPM10-06	VPF10-06	3/8" BSP	64,5	2.54	94,5	3.72	42	1.65	142,5	5.61	M28X2	30	1.18	38	1.50
		VPM15-06	VPF15-06	3/8" NPTF													
		VPM18-06	VPF18-06	3/8" BSPT													
06	9	VPM10-08	VPF10-08	1/2" BSP	69,5	2.74	94,5	3.72	42	1.65	147,5	5.81	M28X2	30	1.18	38	1.50
		VPM15-08	VPF15-08	1/2" NPTF													
		VPM18-08	VPF18-08	1/2" BSPT													
08	13	VPM20-08	VPF20-08	1/2" BSP	76,5	3.01	110,0	4.33	49	1.93	168	6.61	M36X3	36	1.42	45	1.77
		VPM25-08	VPF25-08	1/2" NPTF													
		VPM28-08	VPF28-08	1/2" BSPT													
08	13	VPM10-12	VPF10-12	3/4" BSP	83,5	3.29	110,0	4.33	49	1.93	175	6.89	M36X3	36	1.42	45	1.77
		VPM15-12	VPF15-12	3/4" NPTF													
		VPM18-12	VPF18-12	3/4" BSPT													
12	15	VPM20-12	VPF20-12	3/4" BSP	83,5	3.29	110,0	4.33	52	2.05	175	6.89	M39X3	41	1.61	48	1.89
		VPM25-12	VPF25-12	3/4" NPTF													
		VPM28-12	VPF28-12	3/4" BSPT													
16	17	VPM10-16	VPF10-16	1" BSP	98,0	3.86	127,0	5.00	60	2.36	202,5	7.97	M45X3	46	1.81	55	2.17
		VPM15-16	VPF15-16	1" NPTF													
		VPM18-16	VPF18-16	1" BSPT													
20	21	VPM10-20	VPF10-20	1.1/4" BSP	105,0	4.13	137,0	5.39	76	2.99	215	8.46	M55X3	55	2.17	70	2.76
		VPM15-20	VPF15-20	1.1/4" NPTF													
		VPM18-20	VPF18-20	1.1/4" BSPT													
24	30	VPM10-24	VPF10-24	1.1/2" BSP	132,5	5.22	175,0	6.89	94	3.70	271	10.70	M72X4	65	2.56	85	3.35
		VPM15-24	VPF15-24	1.1/2" NPTF													
		VPM18-24	VPF18-24	1.1/2" BSPT													

* Other threads available on request
Ulteriori filettature disponibili a richiesta

MAIN DATA:

The VP series represents the ideal combination of flat face and screw to connect designs. This range achieves very high working pressures and is suitable for heavy duty working conditions such as pulsating pressures and vibrations. VP series offers the important possibility of connecting and disconnecting the two parts under pressure with no spillage.

- Possibility to connect and disconnect the two halves with residual pressures up to 300 bar (4300 psi).
- Perfect sealing of plug and socket both when coupled and uncoupled.
- Extremely low spillage during connection and disconnection.
- No inclusion of air or external media during connection and disconnection.
- The flat faces are easy to clean.
- Sleeve with a safety device preventing from accidental disconnection
- Standard seals in nitril rubber
- Antiextrusion ring in teflon
- Working temperature with standard seals: -20° C/+110° C.
- Special seals on request: Viton, EPDM, Neoprene, Silicone
- Special caps on request


CARATTERISTICHE PRINCIPALI:

La serie VP rappresenta l'ideale combinazione tra il concetto di innesto a facce piane e l'innesto a vite. Il risultato è un innesto dalle prestazioni eccezionali capace di resistere alle più difficili condizioni d'impiego come pressioni pulsanti ed elevate vibrazioni. Particolarmente importante è la possibilità di connessione e sgancio in presenza di pressioni residue fino a 300 bar.

- Possibilità di connessione e sgancio in pressione fino a 300 bar.
- Tenuta totale con innesti separati e accoppiati
- Perdite di fluido bassissime nelle fasi di accoppiamento e sgancio.
- Nessuna intrusione di agenti esterni durante le connessioni
- Facile pulizia delle superfici di accoppiamento
- Ghiera con sistema anti-sgancio
- Guarnizioni standard in gomma nitrilica
- Anelli antiestrusione in teflon
- Temperature d'esercizio con guarnizioni standard: -20° C/ +110° C
- Guarnizioni speciali a richiesta: Viton, EPDM, Neoprene e Silicone.
- Tappi speciali a richiesta

"VP" SERIES COUPLINGS
PRESSURE DROP GRAPH

GRAFICO PERDITE DI CARICO
INNESTI SERIE "VP"

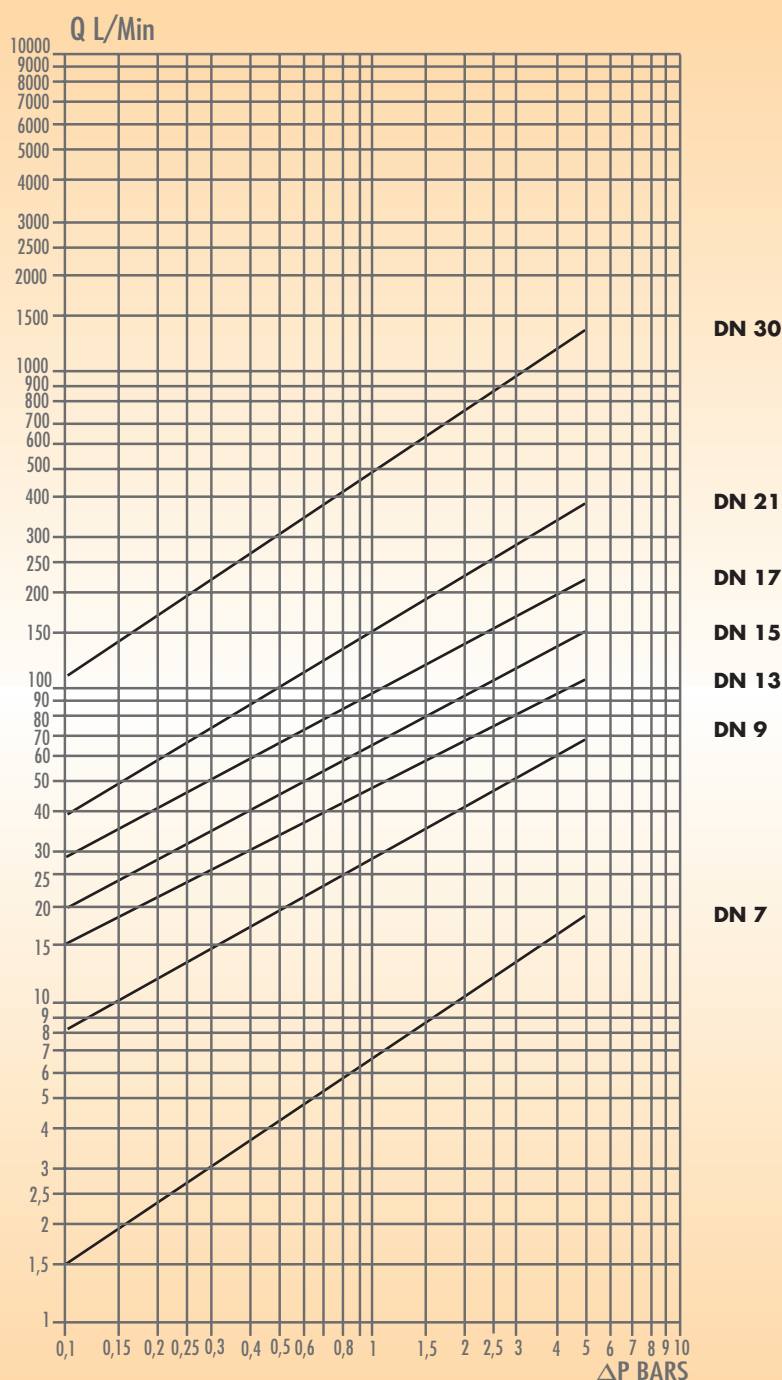


FLUID: HIDRAULIC OIL SAE 10W
TEMPERATURE: 50° C
VISCOSITY: 3 E°

FLUIDO: OLIO IDRAULICO SAE 10W
TEMPERATURA: 50° C
VISCOSITA': 3 E°

PERFORMANCES / PRESTAZIONI

SIZE BASE	Ø DN	MAX.WORK PRESSURE MAX PRESSIONE ESERCIZIO		MIN. BURST PRESSURE / MIN. PRESSIONE SCOPPIO						WEIGHT / PESO					
				COUPLED/ACCOPIATO		PLUG/MASCHIO		SOCKET/FEMMINA		PLUG/MASCHIO		SOCKET/FEMMINA			
	mm	bar	psi	bar	psi	bar	psi	bar	psi	kg	lbs	kg	lbs		
04	7	600	8700	1500	21750	1800	26100	1250	18125	0,16	0.35	0,45	1.00		
06	9	550	7975	1350	19575	1500	21750	1250	18125	0,21	0.46	0,63	1.40		
06	9	550	7975	1350	19575	1500	21750	1250	18125	0,21	0.46	0,60	1.33		
08	13	550	7975	1350	19575	1700	24650	1100	15950	0,33	0.73	0,96	2.13		
08	13	550	7975	1350	19575	1700	24650	1100	15950	0,33	0.73	0,96	2.13		
12	15	525	7612,5	1350	19575	1600	23200	1000	14500	0,42	0.93	1,26	2.80		
16	17	525	7612,5	1350	19575	1500	21750	1000	14500	0,62	1.37	1,83	4.06		
20	21	500	7250	1250	18125	1200	17400	900	13050	0,96	2.13	2,90	6.44		
24	30	400	5800	1000	14500	1000	14500	900	13050	2.10	4.60	6.30	14.00		

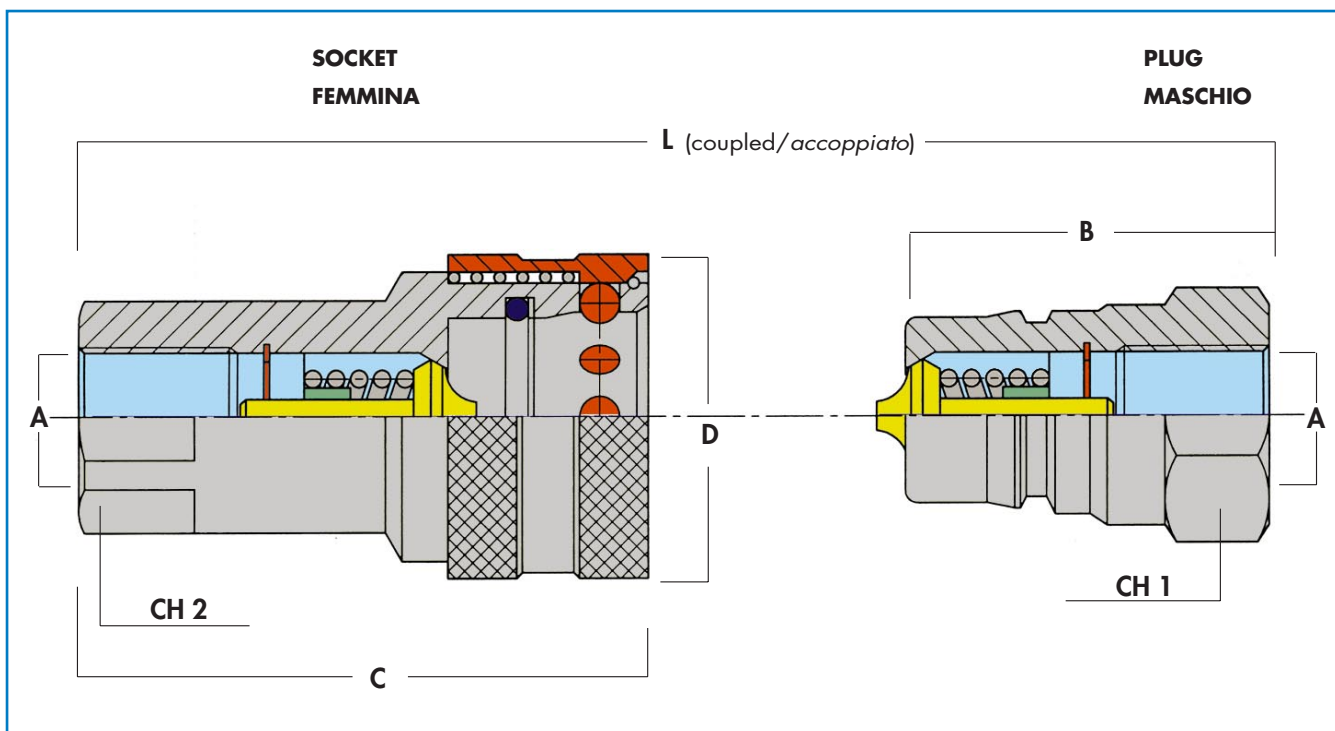

DIMENSIONS / DIMENSIONI

SIZE BASE	Ø DN		CODE / CODICE		ØA*	B		C		ØD		L		Ch1		Ch2	
	mm	inch	PLUG MASCHIO	SOCKET FEMMINA		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
02	5,0	1/8"	XM10-02	XF10-02	1/8"BSP	30	1.18	49	1.93	24	0.94	60,5	2.38	14	0.55	14	0.55
			XM15-02	XF15-02	1/8"NPTF												
04	6,3	1/4"	XM10-04	XF10-04	1/4"BSP	35	1.38	57	2.24	27	1.06	70,5	2.78	19	0.75	19	0.75
			XM15-04	XF15-04	1/4"NPTF												
06	10,0	3/8"	XM10-06	XF10-06	3/8"BSP	41	1.61	66	2.60	34	1.34	82,5	3.25	24	0.94	24	0.94
			XM15-06	XF15-06	3/8"NPTF												
08	12,5	1/2"	XM10-08	XF10-08	1/2"BSP	46	1.81	74	2.91	42	1.65	92,5	3.64	27	1.06	27	1.06
			XM15-08	XF15-08	1/2"NPTF												
12	20,0	3/4"	XM10-12	XF10-12	3/4"BSP	55	2.17	90	3.54	50	1.97	111,0	4.37	36	1.42	36	1.42
			XM15-12	XF15-12	3/4"NPTF												
16	25,0	1"	XM10-16	XF10-16	1"BSP	66	2.60	106	4.17	60	2.36	133,0	5.24	41	1.61	41	1.61
			XM15-16	XF15-16	1"NPTF												

* Other threads available on request
Ulteriori filettature disponibili a richiesta

MAIN DATA:


Series X is made in AISI 316 stainless steel and is interchangeable according to ISO 7241-B design. This series finds application with water or corrosive media and in corrosive environments.

- Interchangeability according to ISO 7241-B
- Material: AISI 316 stainless steel.
- Internal valves and components in AISI 316.
- Standard seals in Viton
- Working temperature range with standard Viton seals: -15°C/ +180°C
- Special seals on request.

CARATTERISTICHE PRINCIPALI:


La serie X è costruita in acciaio inox AISI 316 ed è dimensionalmente intercambiabile secondo la normativa ISO 7241-B. Questa serie trova applicazione ideale in situazioni ambientali corrosive o con fluidi particolari quali acqua, alimentari, acidi, etc...

- Intercambiabilità secondo ISO 7241-B
- Materiali: acciaio inox AISI 316
- Valvole e componenti interni in AISI 316.
- Guarnizioni standard in Viton
- Temperature d'esercizio con guarnizioni standard: -15°C/+180°C
- Guarnizioni speciali a richiesta.

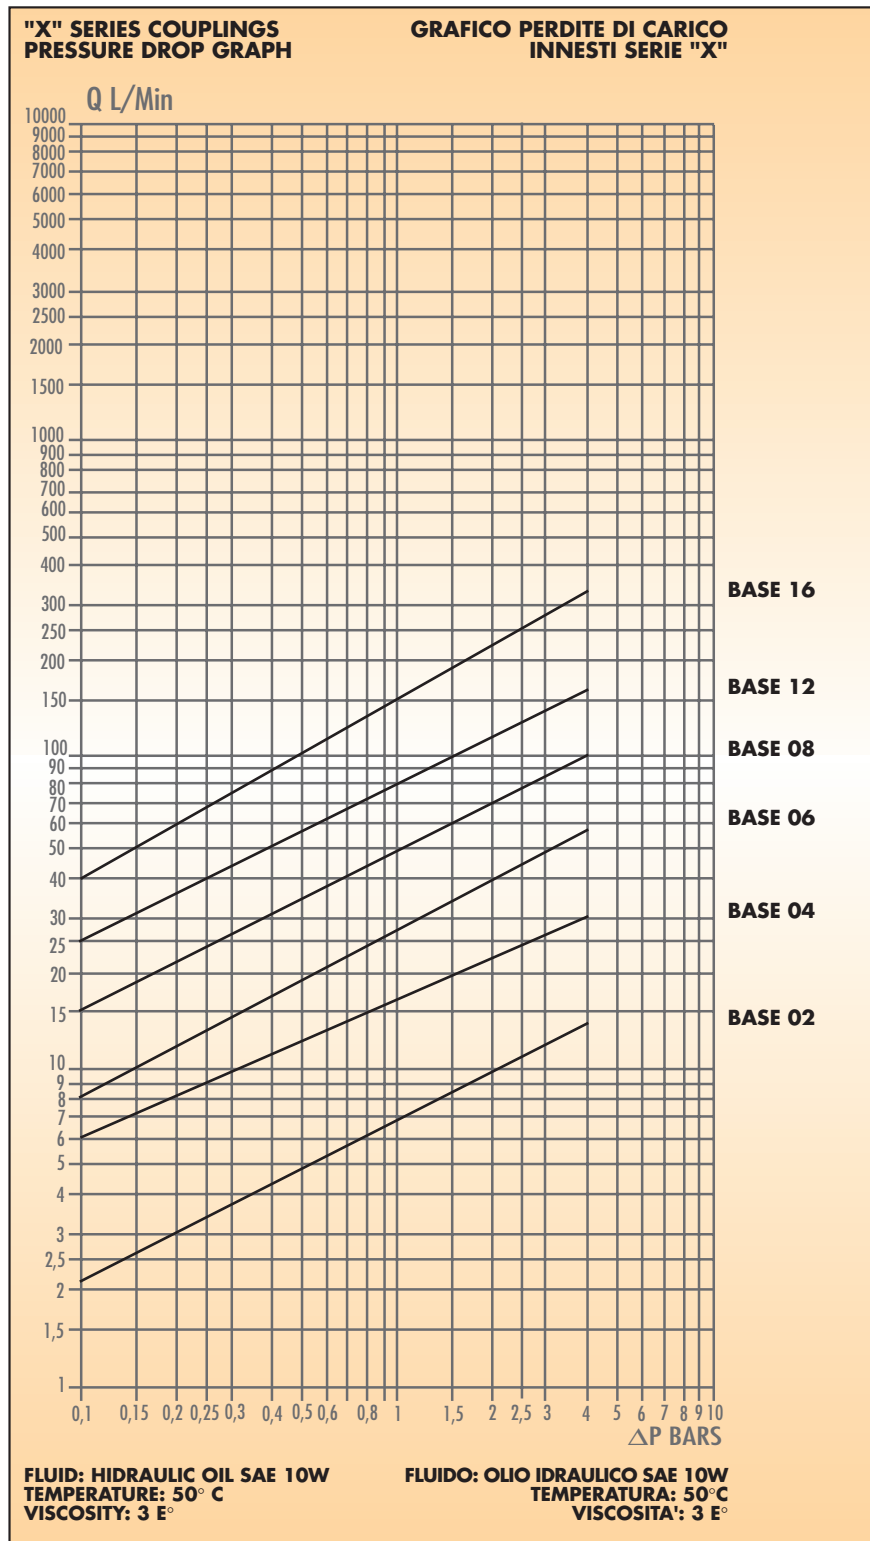

PERFORMANCES / PRESTAZIONI

SIZE BASE	Ø DN		MAX. WORK PRESSURE MAX PRESSIONE ESERCIZIO		BURST PRESSURE PRESSIONE SCOPPIO		WEIGHT / PESO			
							PLUG / MASCHIO		SOCKET / FEMMINA	
	mm	inch	bar	psi	bar	psi	kg	lbs	kg	lbs
02	5,0	1/8"	150	2175.0	600	8700	0,020	0.044	0,070	0.156
04	6,3	1/4"	150	2175.0	600	8700	0,040	0.080	0,120	0.260
06	10,0	3/8"	100	1450.0	400	5800	0,070	0.156	0,220	0.489
08	12,5	1/2"	100	1450.0	400	5800	0,102	0.227	0,322	0.716
12	20,0	3/4"	100	1450.0	400	5800	0,195	0.430	0,585	1.300
16	25,0	1"	75	1087.5	300	4350	0,370	0.820	0,860	1.911

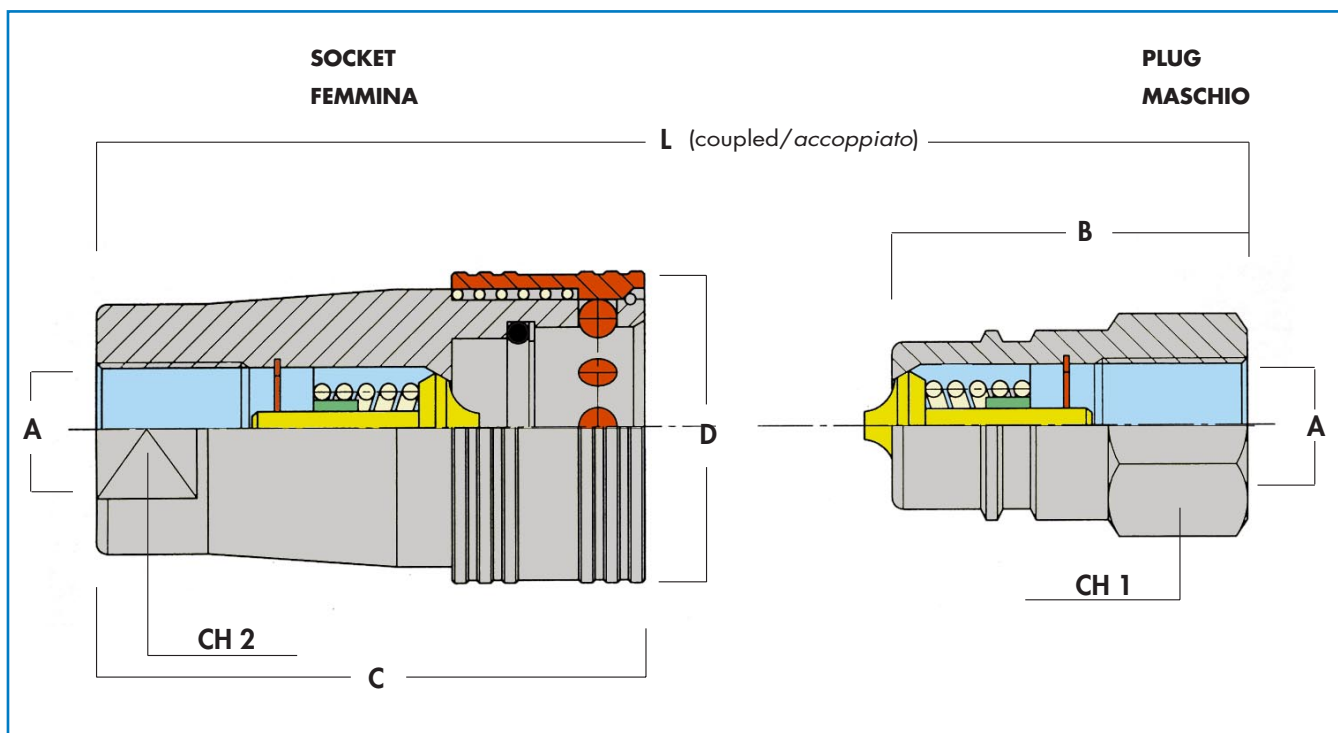

DIMENSIONS / DIMENSIONI

SIZE BASE	Ø DN		CODE / CODICE		ØA*	B		C		Ø D		L		Ch1		Ch2	
	mm	inch	PLUG MASCHIO	SOCKET FEMMINA		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
20	32	1.1/4"	RM10-20	RF10-20	1.1/4"BSP	70	2.76	110	4.33	70	2.75	140	5.51	50	1.97	50	1.97
			RM15-20	RF15-20	1.1/4"NPTF												
			RM18-20	RF18-20	1.1/4"BSPT												
24	38	1.1/2"	RM10-24	RF10-24	1.1/2"BSP	70	2.76	114	4.49	81	3.18	140	5.51	60	2.36	55	2.17
			RM15-24	RF15-24	1.1/2"NPTF												
			RM18-24	RF18-24	1.1/2"BSPT												
32	50	2"	RM10-32	RF10-32	2"BSP	89	3.50	139	5.47	113	4.45	177	6.97	70	2.76	70	2.76
			RM15-32	RF15-32	2"NPTF												
			RM18-32	RF18-32	2"BSPT												
40	63	2.1/2"	RM10-40	RF10-40	2.1/2"BSP	89	3.50	139	5.47	113	4.45	177	6.97	84	3.30	84	3.30
			RM15-40	RF15-40	2.1/2"NPTF												
			RM18-40	RF18-40	2.1/2"BSPT												
50	76	3"	RM10-50	RF10-50	3"BSP	100	3.94	155	6.10	139	5.47	200	7.87	100	3.94	100	3.94
			RM15-50	RF15-50	3"NPTF												
			RM18-50	RF18-50	3"BSPT												

* Other threads available on request
 Ulteriori filettature disponibili a richiesta

MAIN DATA:

Series R includes large bore quick disconnect couplings (1 1/4" to 3") made in AISI 316 stainless steel. This series is ideal in industrial applications with water or corrosive media.

- Material: AISI 316 stainless steel.
- Internal valves and components in AISI 316.
- Standard seals in Viton.
- Working temperature range with standard seals: -15°C/+180°C
- Special seals on request.
- Free flow version on request.


CARATTERISTICHE PRINCIPALI:

La serie R è costituita da innesti di grosso diametro (1 1/4" - 3") costruiti in acciaio inox AISI 316. Questi innesti trovano applicazione ideale nell'impiantistica industriale in presenza di fluidi corrosivi.

- Materiali: acciaio inox AISI 316
- Valvole e componenti interni in AISI 316.
- Guarnizioni standard in Viton
- Temperature d'esercizio con guarnizioni standard: -15°C/+180°C
- A richiesta guarnizioni speciali e versioni a passaggio libero.

"R" SERIES COUPLINGS
PRESSURE DROP GRAPH

GRAFICO PERDITE DI CARICO
INNESTI SERIE "R"

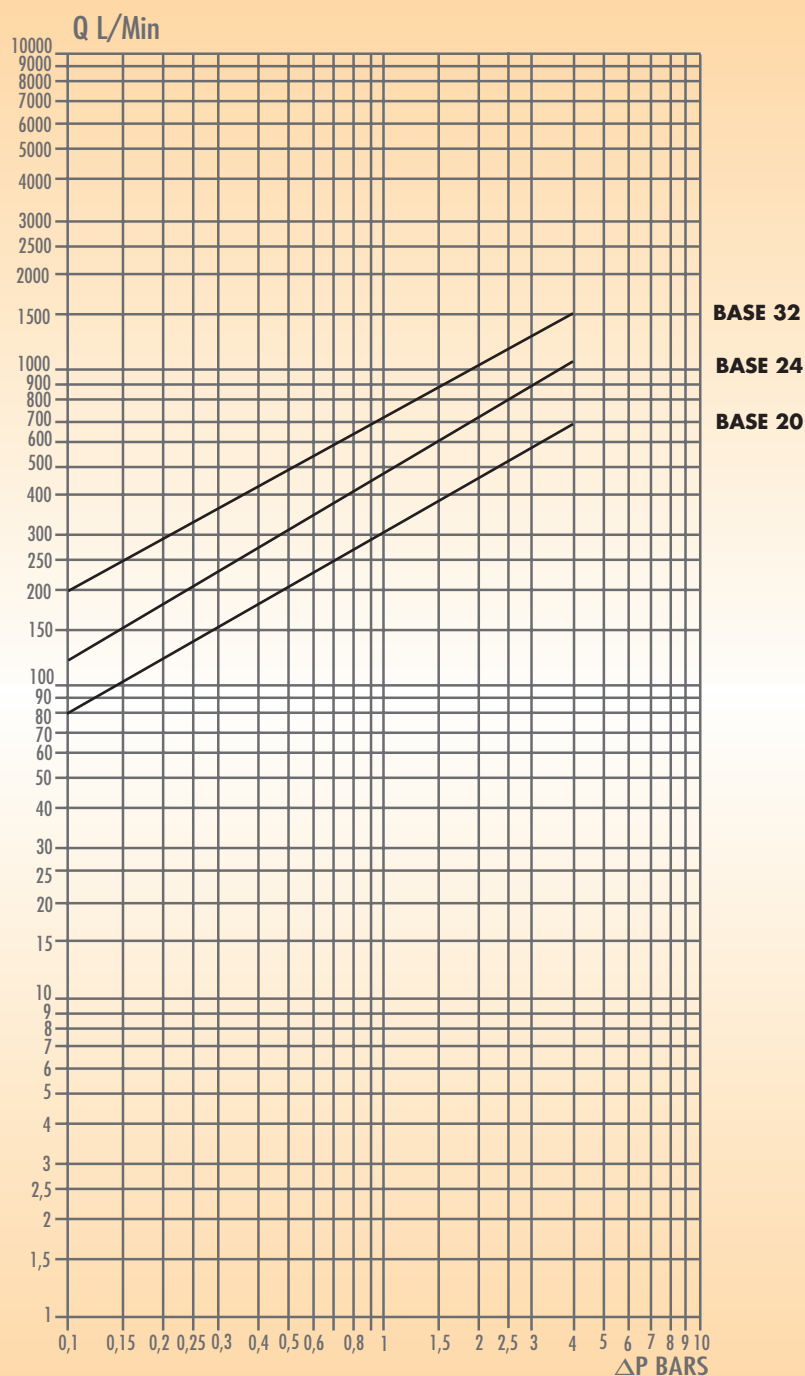


FLUID: HIDRAULIC OIL SAE 10W
TEMPERATURE: 50°C
VISCOSITY: 3 E°

FLUIDO: OLIO IDRAULICO SAE 10W
TEMPERATURA: 50°C
VISCOSITA': 3 E°

PERFORMANCES / PRESTAZIONI

SIZE BASE	Ø DN		MAX.WORK PRESSURE MAX PRESSIONE ESERCIZIO		BURST PRESSURE PRESSIONE SCOPPIO		WEIGHT / PESO			
	mm	inch	bar	psi	bar	psi	PLUG / MASCHIO		SOCKET/FEMMINA	
20	32	1.1/4"	50	725	200	2900	0,460	1.022	1,38	3.070
24	38	1.1/2"	40	580	160	2320	0,720	1.600	1,82	4.040
32	50	2"	30	435	120	1740	2,020	4.489	4,42	9.820
40	63	2.1/2"	20	290	80	1160	1,820	4.040	4,05	9.000
50	76	3"	20	290	80	1160	3,230	7.170	7,00	15.500

SERIES Z SERIE Z

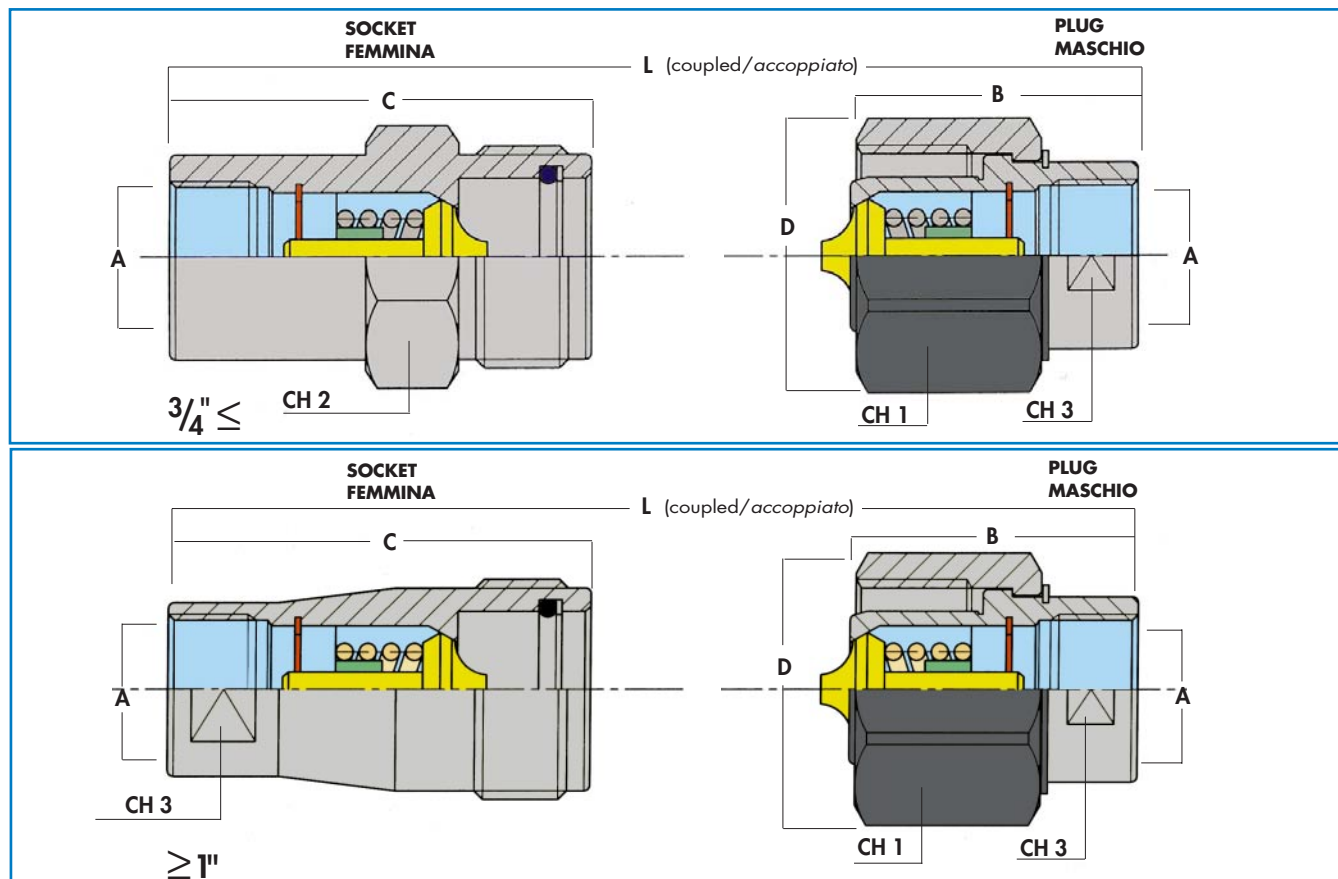

DIMENSIONS / DIMENSIONI

SIZE BASE	Ø DN		CODE / CODICE		ØA *	B		C		ØD		L		Ch1		Ch2		Ch3	
	mm	inch	PLUG MASCHIO	SOCKET FEMMINA		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
04	6	1/4"	ZM10-04	ZF10-04	1/4"BSP	36	1,42	50	1,97	31	1,22	69	2,72	28	1,10	24	0,94	16	0,63
			ZM15-04	ZF15-04	1/4"NPTF														
			ZM18-04	ZF18-04	1/4"BSPT														
06	10	3/8"	ZM10-06	ZF10-06	3/8"BSP	42	1,65	57	2,24	38	1,5	82	3,23	34	1,34	30	1,18	20	0,79
			ZM15-06	ZF15-06	3/8"NPTF														
			ZM18-06	ZF18-06	3/8"BSPT														
08	12	1/2"	ZM10-08	ZF10-08	1/2"BSP	55	2,17	75	2,95	47	1,85	100	3,94	42	1,65	38	1,50	27	1,06
			ZM15-08	ZF15-08	1/2"NPTF														
			ZM18-08	ZF18-08	1/2"BSPT														
12	20	3/4"	ZM10-12	ZF10-12	3/4"BSP	61	2,40	90	3,54	56	2,2	114	4,49	50	1,97	42	1,65	30	1,18
			ZM15-12	ZF15-12	3/4"NPTF														
			ZM18-12	ZF18-12	3/4"BSPT														
16	25	1"	ZM10-16	ZF10-16	1"BSP	61	2,40	88	3,46	67	2,64	120	4,72	60	2,36			40	1,57
			ZM15-16	ZF15-16	1"NPTF														
			ZM18-16	ZF18-16	1"BSPT														
20	32	1.1/4"	ZM10-20	ZF10-20	1.1/4"BSP	70	2,76	105	4,13	79	3,11	140	5,51	70	2,76			48	1,89
			ZM15-20	ZF15-20	1.1/4"NPTF														
			ZM18-20	ZF18-20	1.1/4"BSPT														
24	38	1.1/2"	ZM10-24	ZF10-24	1.1/2"BSP	70	2,76	105	4,13	90	3,54	140	5,51	80	3,15			52	2,05
			ZM15-24	ZF15-24	1.1/2"NPTF														
			ZM18-24	ZF18-24	1.1/2"BSPT														
32	50	2"	ZM10-32	ZF10-32	2"BSP	86	3,39	130	5,12	128	5,04	173	6,81	120	4,72			80	3,15
			ZM15-32	ZF15-32	2"NPTF														
			ZM18-32	ZF18-32	2"BSPT														
40	63	2.1/2"	ZM10-40	ZF10-40	2.1/2"BSP	86	3,39	130	5,12	128	5,04	173	6,81	120	4,72			85	3,35
			ZM15-40	ZF15-40	2.1/2"NPTF														
			ZM18-40	ZF18-40	2.1/2"BSPT														

* Other threads available on request
Ulteriori filettature disponibili a richiesta

MAIN DATA:

Series Z is a screw to connect coupling range made in stainless steel AISI 316 and available in sizes from 1/4" to 2 1/2". This series is adopted for high pressure applications working with either corrosive media or in corrosive environmental conditions.


- Standard material: AISI 316 stainless steel.
- Internal valves and components in AISI 316.
- Locking sleeve in AISI 316 treated with Q.P.Q.
- Standard seals in nitril rubber
- Working temperature: -20°C/+110°C
- Special seals on request: Viton, EPDM, Neoprene.

CARATTERISTICHE PRINCIPALI:

La serie Z è una gamma di innesti a vite costruita in acciaio inox A 316 e disponibile nelle dimensioni dal 1/4" to 2 1/2".


Questa serie viene tipicamente utilizzata in applicazioni dove elevate pressioni di esercizio sono abbinate a situazioni ambientali corrosive o all'impiego di fluidi corrosivi.

- Materiale: acciaio inox AISI 316
- Valvole e componenti interni in AISI 316.
- Ghiera di bloccaggio in AISI 316 trattato al Q.P.Q.
- Guarnizioni in gomma nitrilica
- Temperature d'esercizio con guarnizioni standard: -20°C/+110°C
- Guarnizioni speciali a richiesta: Viton, EPDM, Neoprene.

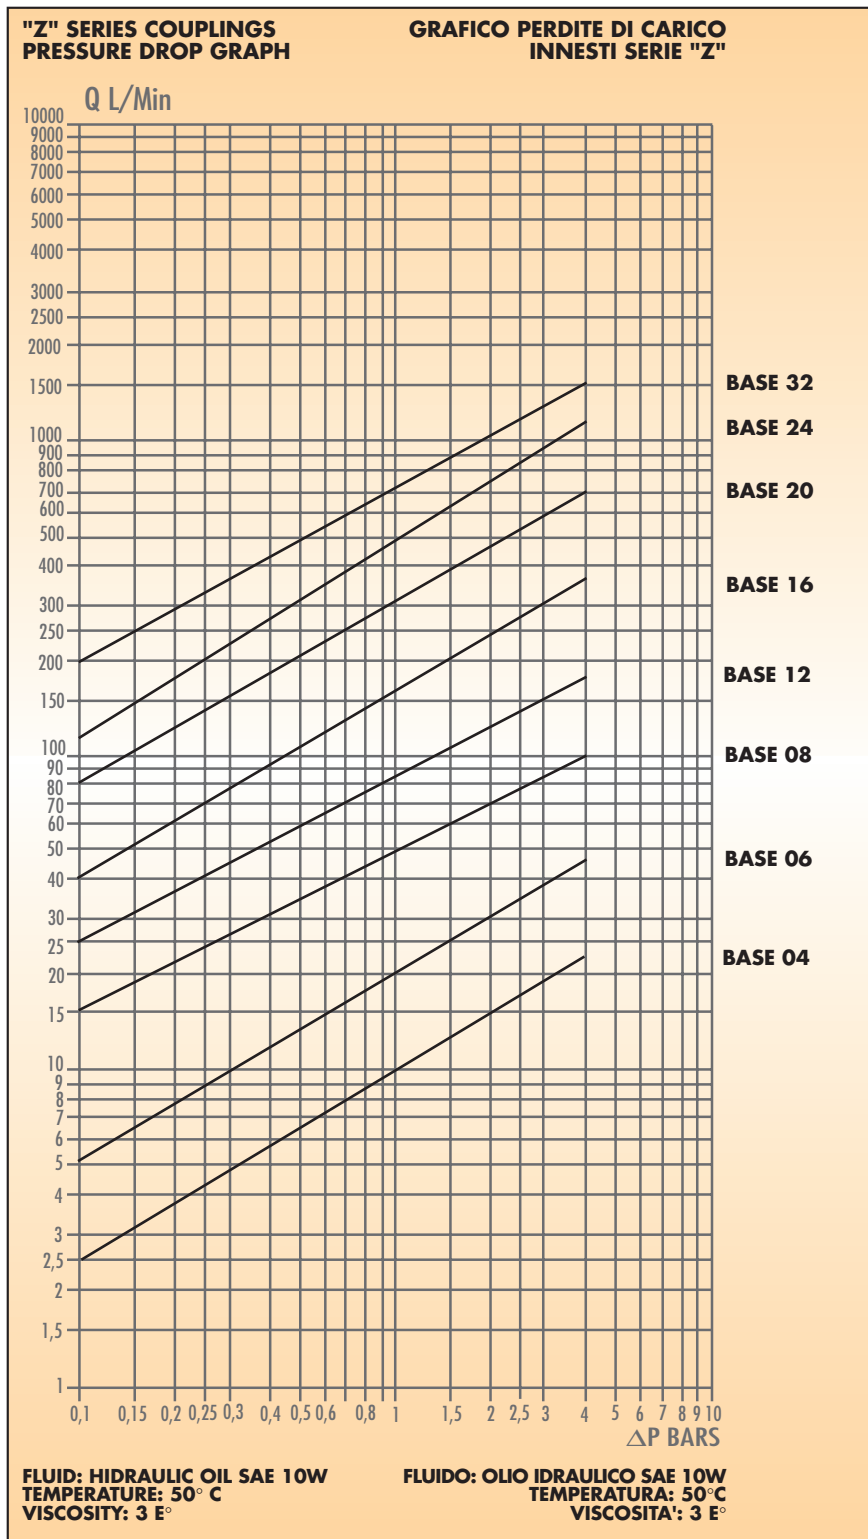

PERFORMANCES / PRESTAZIONI

SIZE BASE	Ø DN		MAX.WORK PRESSURE MAX PRESSIONE ESERCIZIO		BURST PRESSURE PRESSIONE SCOPPIO		WEIGHT / PESO			
	mm	inch	bar	psi	bar	psi	PLUG / MASCHIO		SOCKET/FEMMINA	
							kg	lbs	kg	lbs
04	6	1/4"	500	7250	2000	29000	0,080	0.180	0,100	0.220
06	10	3/8"	450	6525	1800	26100	0,150	0.330	0,180	0.400
08	12	1/2"	400	5800	1600	23200	0,260	0.580	0,392	0.870
12	20	3/4"	350	5075	1400	20300	0,370	0.830	0,550	1.210
16	25	1"	300	4350	1200	17400	0,660	1.467	0,700	1.556
20	32	1.1/4"	250	3625	1000	14500	1,000	2.220	1,030	2.290
24	38	1.1/2"	220	3190	880	12760	1,350	3.000	1,200	2.670
32	50	2"	150	2175	600	8700	4,100	9.111	3,630	8.067
40	63	2.1/2"	120	1740	480	6960	3,640	8.080	3,300	7.330

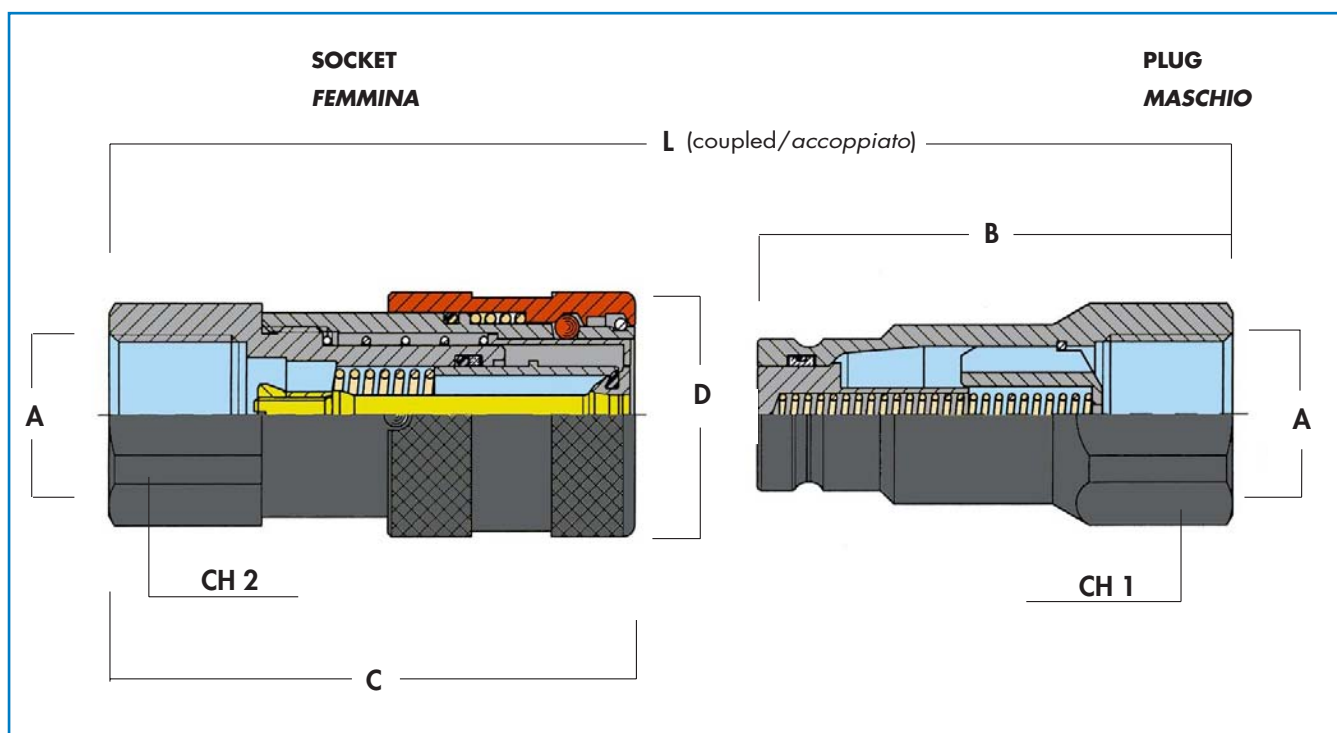

DIMENSIONS / DIMENSIONI

SIZE BASE	Ø DN mm	CODE / CODICI		Ø A*	B		C		Ø D		L		Ch1		Ch2	
		PLUG MASCHIO	SOCKET FEMMINA		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
04	7	QM10-04	QF10-04	1/4" BSP	48,0	1.89	48,0	1.89	28	1.10	85,5	3.37	22	0.87	22	0.87
		QM15-04	QF15-04	1/4" NPTF												
		QM18-04	QF18-04	1/4" BSPT												
06	9	QM10-06	QF10-06	3/8" BSP	60,0	2.36	64,5	2.54	32	1.26	109	4.29	24	0.94	27	1.06
		QM15-06	QF15-06	3/8" NPTF												
		QM18-06	QF18-06	3/8" BSPT												
06	9	QM10-08	QF10-08	1/2" BSP	62,5	2.46	69,5	2.74	32	1.26	117	4.59	27	1.06	27	1.06
		QM15-08	QF15-08	1/2" NPTF												
		QM18-08	QF18-08	1/2" BSPT												
08	13	QM20-08	QF20-08	1/2" BSP	68,0	2.68	73,5	2.89	38	1.50	125	4.92	32	1.26	32	1.26
		QM25-08	QF25-08	1/2" NPTF												
		QM28-08	QF28-08	1/2" BSPT												
08	13	QM10-12	QF10-12	3/4" BSP	70,5	2.78	80,5	3.17	38	1.50	135	5.30	36	1.42	36	1.42
		QM15-12	QF15-12	3/4" NPTF												
		QM18-12	QF18-12	3/4" BSPT												
12	15	QM20-12	QF20-12	3/4" BSP	70,5	2.78	78,0	3.07	42	1.65	132	5.20	36	1.42	36	1.42
		QM25-12	QF25-12	3/4" NPTF												
		QM28-12	QF28-12	3/4" BSPT												
16	17	QM10-16	QF10-16	1" BSP	82,5	3.25	92,5	3.64	48	1.89	154	6.06	45	1.77	45	1.77
		QM15-16	QF15-16	1" NPTF												
		QM18-16	QF18-16	1" BSPT												
20	21	QM10-20	QF10-20	1.1/4" BSP	90,0	3.54	105	4.13	55	2.17	173	6.81	55	2.17	55	2.17
		QM15-20	QF15-20	1.1/4" NPTF												
		QM18-20	QF18-20	1.1/4" BSPT												
24	30	QM10-24	QF10-24	1.1/2" BSP	111,0	4.37	133	5.22	80	3.15	215	8.46	70	2.76	65	2.56
		QM15-24	QF15-24	1.1/2" NPTF												
		QM18-24	QF18-24	1.1/2" BSPT												
32	45	QM10-32	QF10-32	2" BSP	125,0	4.92	165	6.50	100	3.94	250	9.84	75	2.95	80	3.15
		QM15-32	QF15-32	2" NPTF												
		QM18-32	QF18-32	2" BSPT												

* Other threads available on request
Ulteriori filettature disponibili a richiesta

MAIN DATA:

Series Q flat face couplings are an innovative product which finds ideal application in medium corrosive environmental conditions. The Q series is a special version of F series where the carbon steel components are treated with QPQ. In situations where the traditional surface treatments do not allow an acceptable performance but stainless steel can not be adopted, series Q offers an excellent performance/price relation together with all the advantages linked to the flat face design. Typical applications are: insecticides, diathermic oils, air conditioning fluids, water etc.

- Material: carbon steel QPQ treated
- Internal valves in austenitic stainless steel
- Springs in AISI 302, balls in AISI 420
- Perfect sealing of plug and socket both when coupled and uncoupled
- Extremely low spillage during connection and disconnection.
- No inclusion of air or external media during connection and disconnection.
- The flat faces are easy to clean
- Sleeve with a safety device preventing from accidental disconnection.
- Increased resistance to abrasion and corrosion
- Size 3/8 (DN 9) interchangeable to HTMA design

Since series Q is mainly associated to special applications, the requested seal type must be specified when an order is placed (please see page 8, point 6th).

CARATTERISTICHE PRINCIPALI:


Gli innesti a facce piane serie Q sono un prodotto innovativo e originale che trova applicazione ideale in ambienti mediamente corrosivi. La serie Q è una versione speciale derivata dalla serie F in cui i componenti in acciaio al carbonio vengono sottoposti a specifici trattamenti di carbonitrurazione (QPQ). Nei casi in cui i materiali e i trattamenti tradizionali non garantiscano una sufficiente resistenza e per contro non sia necessario o conveniente utilizzare acciai inossidabili, la serie Q permette di ottimizzare il rapporto prestazione/prezzo. La serie Q unisce a queste caratteristiche tutti i vantaggi degli innesti a facce piane. Esempi di applicazione: insetticidi, olii diatermici, fluidi di raffreddamento, acqua.

- Materiali: acciaio al carbonio trattato al QPQ
- Valvole interne in acciaio inossidabile austenitico
- Molle in AISI 302 e sfere in AISI 420
- Tenuta totale con innesti separati o accoppiati
- Perdite di fluido bassissime nelle fasi di accoppiamento e sgancio
- Nessuna intrusione di agenti esterni durante le connessioni
- Facile pulizia delle superfici di accoppiamento
- Ghiera con sistema anti-sgancio
- Aumentata resistenza ad usura, abrasione, e corrosione
- Misura 3/8" (DN 9) intercambiabile a norme HTMA

Poiché questa serie è destinata ad applicazioni speciali è opportuno specificare sempre in fase di ordine il tipo di guarnizione (vedi legenda pag. 9, punto 6).

"Q" SERIES COUPLINGS
PRESSURE DROP GRAPH


GRAFICO PERDITE DI CARICO
INNESTI SERIE "Q"

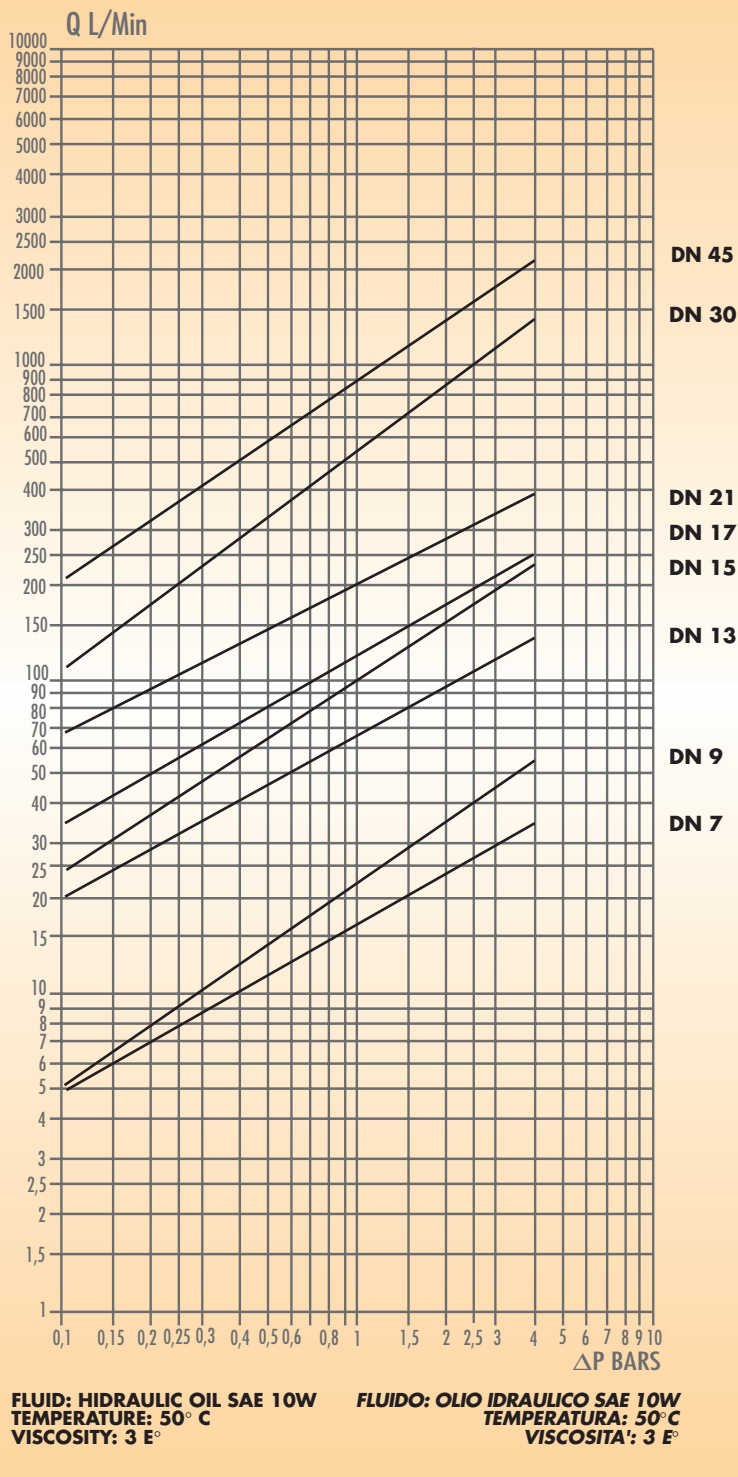

PERFORMANCES / PRESTAZIONI

SIZE BASE	Ø DN mm	MAX. WORK PRESSURE MAX. PRESSIONE ESERCIZIO		MIN. BURST PRESSURE / MIN. PRESSIONE SCOPPIO						WEIGHT / PESO				FORCE CONNECTION FORZA D'AGGANCIO	
		bar	psi	COUPLED/ACCOPIATO		PLUG/MASCHIO		SOCKET/FEMMINA		PLUG/MASCHIO		SOCKET/FEMMINA		kg	lbs
				bar	psi	bar	psi	bar	psi	kg	lbs	kg	lbs		
04	7	300	4350	1200	17400	1600	23200	500	7250	0,045	0.100	0,080	0.18	18	40.00
06	9	300	4350	1200	17400	1650	23925	750	10875	0,055	0.122	0,150	0.330	18	40.00
06	9	300	4350	1200	17400	1650	23925	750	10875	0,090	0.200	0,270	0.600	18	40.00
08	13	250	3625	1200	17400	1600	23200	600	8700	0,090	0.200	0,270	0.600	18	40.00
08	13	250	3625	1200	17400	1600	23200	600	8700	0,185	0.410	0,465	1.030	18	40.00
12	15	250	3625	1000	14500	1400	20300	550	7975	0,185	0.410	0,465	1.030	20	44.44
16	17	250	3625	850	12325	1100	15950	450	6525	0,270	0.600	0,720	1.600	25	55.56
20	21	250	3625	850	12325	1100	15950	600	8700	0,600	1.330	1,250	2.780	31	68.89
24	30	200	2900	700	10150	850	12325	400	5800	0,900	2.000	2,100	4.670	43	95.56
32	45	180	2610	700	10150	700	10150	400	5800	1,450	3.220	4,150	9.220	50	111.11

SERIES M SERIE M

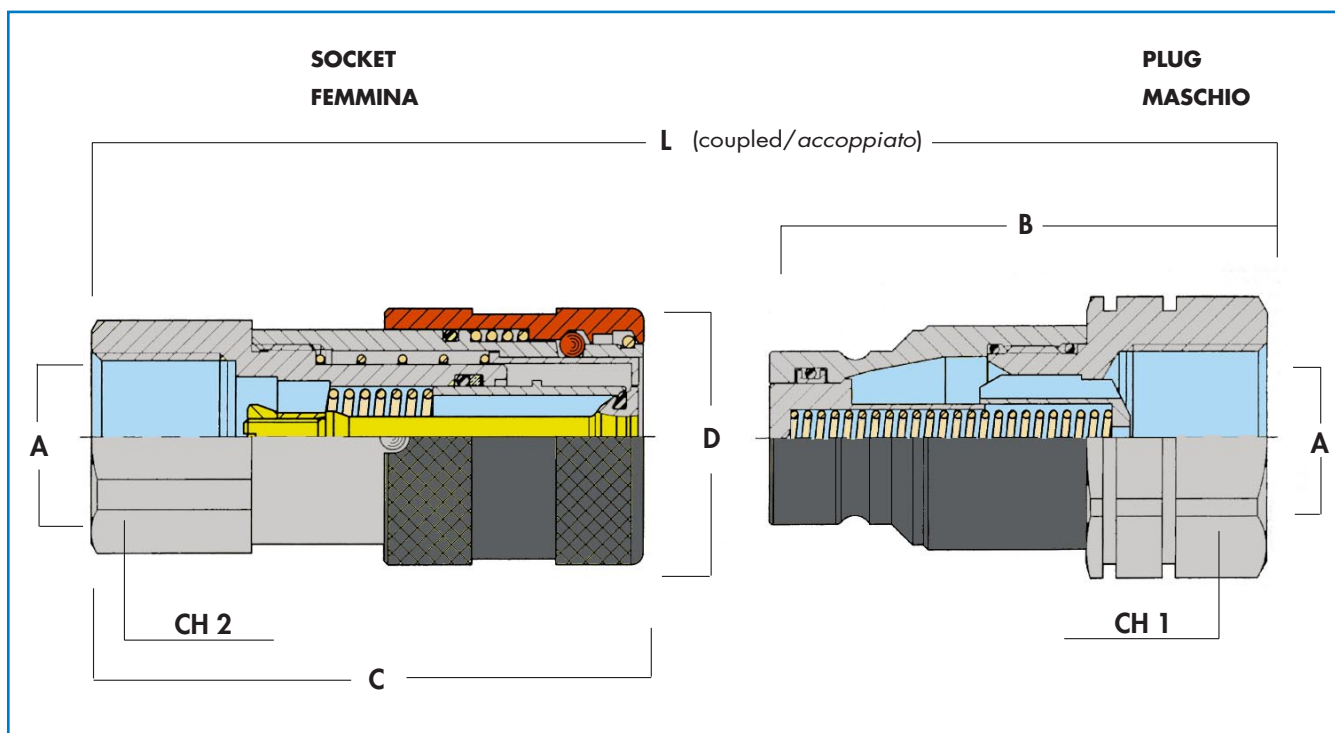

DIMENSIONS / DIMENSIONI

SIZE BASE	Ø DN mm	CODE / CODICE		ØA*	B		C		ØD		L		Ch1		Ch2	
		PLUG MASCHIO	SOCKET FEMMINA		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
04	7	MM10-04	MF10-04	1/4"BSP	48	1,89	48	1,89	28	1,10	85,5	3,37	22	0,87	22	0,87
		MM15-04	MF15-04	1/4"NPTF												
		MM18-04	MF18-04	1/4"BSPT												
06	9	MM10-06	MF10-06	3/8"BSP	60	2,36	64,5	2,54	32	1,26	109	4,29	24	0,94	27	1,06
		MM15-06	MF15-06	3/8"NPTF												
		MM18-06	MF18-06	3/8"BSPT												
06	9	MM10-08	MF10-08	1/2"BSP	62,5	2,46	69,5	2,74	32	1,26	117	4,59	27	1,06	27	1,06
		MM15-08	MF15-08	1/2"NPTF												
		MM18-08	MF18-08	1/2"BSPT												
08	13	MM20-08	MF20-08	1/2"BSP	68	2,68	73,5	2,89	38	1,50	125	4,92	32	1,26	32	1,26
		MM25-08	MF25-08	1/2"NPTF												
		MM28-08	MF28-08	1/2"BSPT												
08	13	MM10-12	MF10-12	3/4"BSP	70,5	2,78	80,5	3,17	38	1,50	135	5,30	36	1,42	36	1,42
		MM15-12	MF15-12	3/4"NPTF												
		MM18-12	MF18-12	3/4"BSPT												
12	15	MM20-12	MF20-12	3/4"BSP	70,5	2,78	78	3,07	42	1,65	132	5,20	36	1,42	36	1,42
		MM25-12	MF25-12	3/4"NPTF												
		MM28-12	MF28-12	3/4"BSPT												
16	17	MM10-16	MF10-16	1"BSP	82,5	3,25	92,5	3,64	48	1,89	154	6,06	45	1,77	45	1,77
		MM15-16	MF15-16	1"NPTF												
		MM18-16	MF18-16	1"BSPT												
20	21	MM10-20	MF10-20	1.1/4"BSP	90	3,54	105	4,13	55	2,17	173	6,81	55	2,17	55	2,17
		MM15-20	MF15-20	1.1/4"NPTF												
		MM18-20	MF18-20	1.1/4"BSPT												
24	30	MM10-24	MF10-24	1.1/2"BSP	111	4,37	133	5,22	80	3,15	215	8,46	70	2,76	65	2,56
		MM15-24	MF15-24	1.1/2"NPTF												
		MM18-24	MF18-24	1.1/2"BSPT												

* Other threads available on request
Ulteriori filettature disponibili a richiesta

MAIN DATA:

Series M flat face couplings are made in AISI 316 stainless steel and represent the ideal solution for corrosive environmental situations or for industrial applications with special chemical fluids, food and pharmaceutical.

- Material AISI 316 stainless steel
- Springs in AISI 302, balls in AISI 316
- Perfect sealing of plug and socket both when coupled and uncoupled
- Extremely low spillage during connection and disconnection
- No inclusion of air or external media during connection and disconnection
- The flat faces are easy to clean
- Sleeve with a safety device preventing from accidental disconnection

Since series M is mainly associated to special applications, the requested seal type must be specified when an order is placed.
(Please see page 8, point 6TH).

CARATTERISTICHE PRINCIPALI:


Gli innesti a facce piane serie M sono costruiti in acciaio inossidabile e rappresentano la soluzione ideale per ambienti altamente corrosivi o applicazioni industriali con fluidi chimici, alimentari e farmaceutici.

- Materiali: acciaio inox AISI 316
- Molle in AISI 302 e sfere in AISI 316
- Alte pressioni di esercizio
- Tenuta totale con innesti separati o accoppiati
- Perdite di fluido bassissime nelle fasi di accoppiamento e sgancio
- Nessuna intrusione di agenti esterni durante le connessioni
- Facile pulizia delle superfici di accoppiamento.
- Ghiera con sistema antisgancio
- Misura 3/8" (DN 9) intercambiabile a norme HTMA.

Poichè questa serie è destinata ad applicazioni speciali è opportuno specificare sempre in fase di ordine il tipo di guarnizione.
(Vedi legenda pag 9 punto 6)

"M" SERIES COUPLINGS
PRESSURE DROP GRAPH

GRAFICO PERDITE DI CARICO
INNESTI SERIE "M"

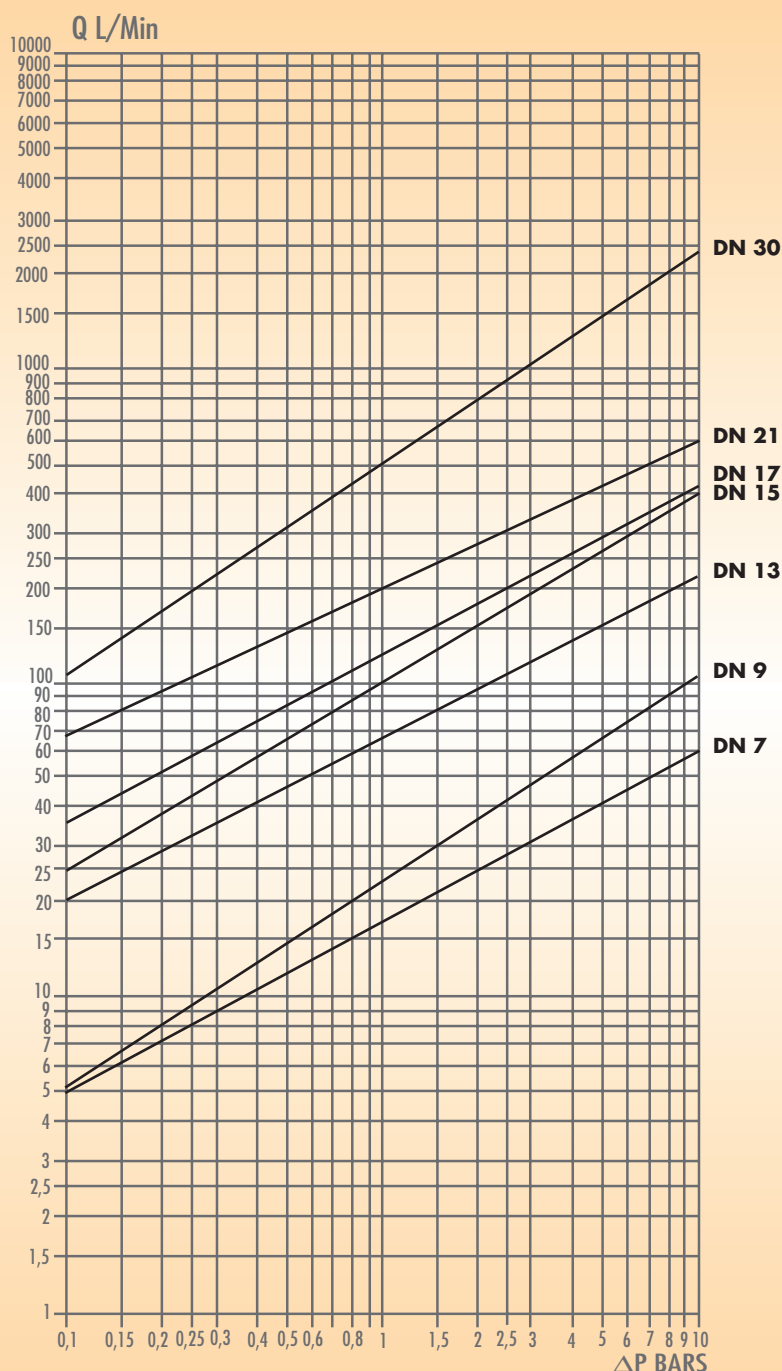

FLUID: HYDRAULIC OIL SAE 10W
TEMPERATURE: 50° C
VISCOSITY: 3 E°


FLUIDO: OLIO IDRAULICO SAE 10W
TEMPERATURA: 50° C
VISCOSITA': 3 E°

PERFORMANCES / PRESTAZIONI

SIZE BASE	Ø DN mm	MAX.WORK PRESSURE		MIN. BURST PRESSURE / PRESSIONE SCOPPIO						WEIGHT / PESO				FORCE TO CONNECT FORZA AGGANCIO	
		bar	psi	COUPLED/ACCOPIATO		PLUG/MASCHIO		SOCKET/FEMMINA		PLUG/MASCHIO		SOCKET/FEMMINA		kg	lbs
04	7	350	5075	1700	24650	1450	21025	600	8700	0,060	0.130	0,080	0.180	18	40.00
06	9	350	5075	1500	21750	1500	21750	800	11600	0,148	0.320	0,150	0.330	18	40.00
06	9	350	5075	1500	21750	1500	21750	800	11600	0,148	0.320	0,270	0.600	18	40.00
08	13	350	5075	1450	21025	1000	14500	750	10875	0,273	0.600	0,270	0.600	18	40.00
08	13	350	5075	1450	21025	1000	14500	750	10875	0,268	0.590	0,465	1.030	18	40.00
12	15	350	5075	1250	18125	950	13775	500	7250	0,300	0.660	0,465	1.030	20	44.44
16	17	350	5075	1150	16675	800	11600	600	8700	0,409	0.900	0,720	1.600	25	55.56
20	21	300	4350	850	12325	800	11600	500	7250	0,610	1.350	1,250	2.780	31	68.89
24	30	250	3625	700	10150	700	10150	400	5800	1,630	3.620	2,100	4.670	43	95.56

SERIES SJ 10 SERIE SJ 10

**Straight swivel joints
Giunti girevoli in linea**

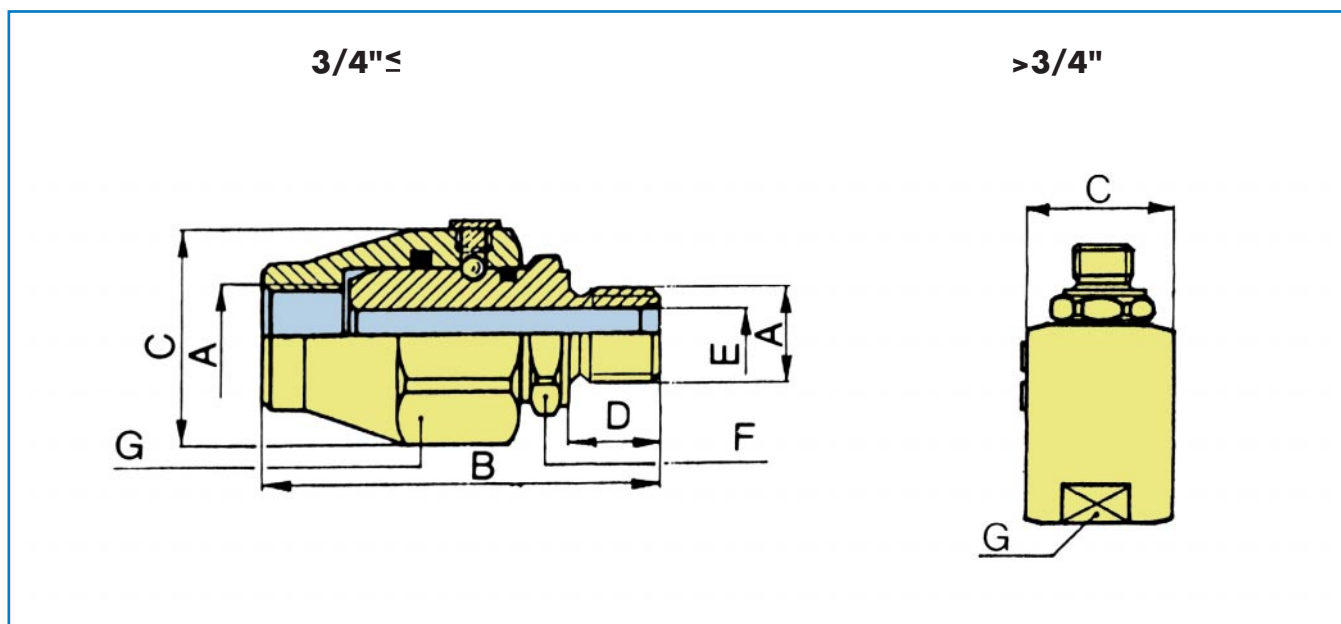

DIMENSIONS / DIMENSIONI

CODE CODICE	A	B		C		D		E		F		G		MAX PRESSURE IN ROTATION PRESSIONE MASSIMA IN ROTAZIONE		STATIC MAX PRESSURE PRESSIONE MASSIMA STATICA	
		mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	bar	psi	bar	psi
SJ 10-04	1/4"	61	2,40	33	1,30	11	0,43	6,5	0,25	ES19	0,74	ES30	1,20	200	2900	400	5800
SJ 10-06	3/8"	66	2,60	37	1,85	14	0,55	9,0	0,35	ES24	0,94	ES34	1,34	200	2900	400	5800
SJ 10-08	1/2"	70	2,75	42	1,65	15	0,59	12,0	0,47	ES27	1,06	ES36	1,41	150	2175	300	4350
SJ 10-12	3/4"	79	3,10	50	1,90	19	0,75	16,0	0,63	ES34	1,34	ES45	1,77	150	2175	300	4350
SJ 10-16	1"	90	3,50	55	2,16	21	0,82	20,0	0,78	ES41	1,60	CH50	1,97	100	1450	300	4350
SJ 10-20	1".1/4"	101	3,90	60	2,36	24	0,94	28,0	1,10	ES50	1,96	CH55	2,16	100	1450	300	4350
SJ 10-24	1.1/2"	110	4,30	70	2,75	25	0,98	34,0	1,34	ES55	2,10	CH65	2,56	80	1160	300	4350
SJ 10-32	2"	118	4,60	85	3,34	27	1,06	44,0	1,73	ES65	2,55	CH75	2,56	50	725	250	3625
SJ 10-40	2.1/2"	138	5,40	98	3,85	30	1,18	58,0	2,28	CH80	3,15	CH90	2,95	50	725	250	3625

* Other threads available on request
Ulteriori filettature disponibili a richiesta

MAIN DATA:

The series SJ 10 swivel joints are designed to be mounted between a hose assembly and a rigid component in order to allow and compensate occasional rotations, preventing hose damages. The swivel joint rotation is based on one or two rows of radial balls (one row up to size 1/2" included).

- Standard seals in nitril rubber
- Working temperatures with standard seals: -20°C/+110°C
- Standard thread: BSP (GAS)
- Special materials on request: AISI 303, AISI 316, Brass
- Special seals on request: Viton, EPDM, Silicone
- Special thread on request: NPTF, Metric, UNF

Important: SJ 10 series is not suitable for continuous or fast rotation.

CARATTERISTICHE PRINCIPALI:

I giunti girevoli in linea serie SJ 10 trovano applicazione tra un tubo flessibile e una parte rigida per compensare torsioni e rotazioni occasionali. Il movimento del giunto sul proprio asse impedisce che il tubo si danneggi. La rotazione del giunto è impernata su una o due corone di sfere radiali (una fino al 1/2" compreso).

- Guarnizioni standard in gomma nitrilica.
- Temperature d'esercizio con guarnizioni standard: -20°C/+110°C
- Filettature standard: BSP (GAS)
- Materiali speciali a richiesta: AISI 303, AISI 316, Ottone
- Guarnizioni speciali a richiesta: Viton, EPDM, Silicone
- Filettature speciali a richiesta: NPTF, Metrica, UNF


Attenzione: i giunti SJ 10 non sono idonei per rotazioni veloci e continuative.

SERIES SJ 90


SERIE SJ 90

90° swivel joints
Giunti girevoli a 90°

1"≤

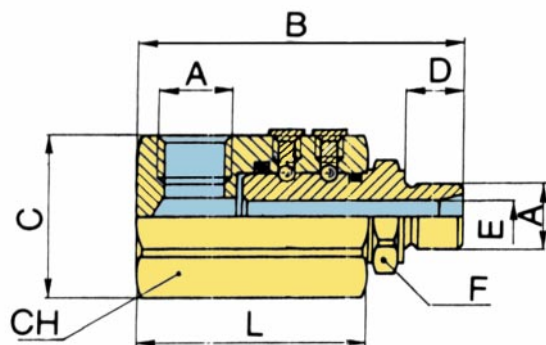

>1"

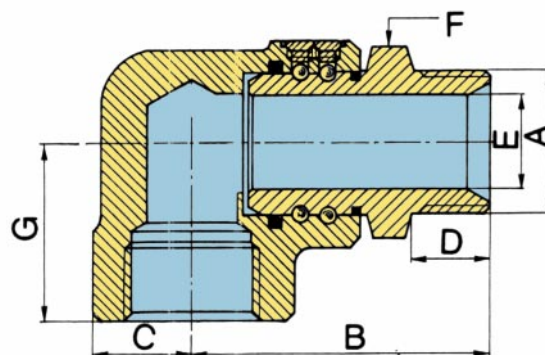

DIMENSIONS / DIMENSIONI

CODE CODICE	A	B		C		D		E		F		G		CH		MAX PRESSURE IN ROTATION BAR PRESSIONE MASSIMA IN ROTAZIONE		STATIC MAX PRESSURE PRESSIONE MASSIMA STATICA	
		mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	bar	psi	bar	psi
SJ 90-04	1/4"	69	2,71	30,5	1,20	11	0,43	6,5	0,25	ES19	0,75	58,0	2,30	ES30	1,18	200	2900	400	5800
SJ 90-06	3/8"	78	3,10	41,5	1,63	14	0,55	9,0	0,35	ES24	0,94	63,0	2,50	ES36	1,42	200	2900	400	5800
SJ 90-08	1/2"	86	3,38	44	1,73	15	0,60	12,0	0,47	ES27	1,06	68,5	2,70	ES38	1,50	150	2175	300	4350
SJ 90-12	3/4"	99	3,90	58	2,30	19	0,75	16,0	0,63	ES34	1,34	79,0	3,11	ES50	1,97	150	2175	300	4350
SJ 90-16	1"	113	4,45	ø60,0	2,36	21	0,82	20,0	0,78	ES41	1,61	90,0	3,54	ø60	2,36	100	1450	300	4350
SJ 90-20	1".1/4"	92	3,62	ø31,5	1,24	24	0,94	28,0	1,10	ES50	1,97	56,5	2,22			100	1450	300	4350
SJ 90-24	1.1/2"	104	4,10	38	1,50	25	0,98	34,0	1,34	ES55	2,16	62,0	2,44			80	1160	300	4350
SJ 90-32	2"	111	4,37	45	1,77	27	1,06	44,0	1,73	ES65	2,56	67,0	2,63			50	725	250	3625
SJ 90-40	2.1/2"	135	5,31	55	2,16	30	1,18	58,0	2,28	CH80	3,15	83,0	3,26			50	725	250	3625

* Other threads available on request
Ulteriori filettature disponibili a richiesta

MAIN DATA:

The series SJ 90 swivel joints are designed to be mounted between a hose assembly and a rigid component in order to allow and compensate occasional rotations, preventing hose damages. The swivel joint rotation is based on one or two rows of radial balls (one row up to size 1/2" included).

- Standard seals in nitril rubber
- Working temperatures with standard seals: -20°C/+110°C
- Standard thread: BSP (GAS)
- Special materials on request: AISI 303, AISI 316, Brass
- Special seals on request: Viton, EPDM, Silicone
- Special thread on request: NPTF, Metric, UNF

Important: SJ 90 series is not suitable for continuous or fast rotation.

CARATTERISTICHE PRINCIPALI:



I giunti girevoli in linea serie SJ 90 trovano applicazione tra un tubo flessibile e una parte rigida per compensare torsioni e rotazioni occasionali. Il movimento del giunto sul proprio asse impedisce che il tubo si danneggi. La rotazione del giunto è impedita su una o due corone di sfere radiali (una fino al 1/2" compreso).

- Guarnizioni standard in gomma nitrilica.
- Temperature d'esercizio con guarnizioni standard: -20°C/+110°C
- Filettature standard: BSP (GAS)
- Materiali speciali a richiesta: AISI 303, AISI 316, Ottone
- Guarnizioni speciali a richiesta: Viton, EPDM, Silicone
- Filettature speciali a richiesta: NPTF, Metrica, UNF

Attenzione: i giunti SJ 90 non sono idonei per rotazioni veloci e continuative.

SERIES CV SERIE CV

IN LINE CHECK VALVE VALVOLA DI NON RITORNO

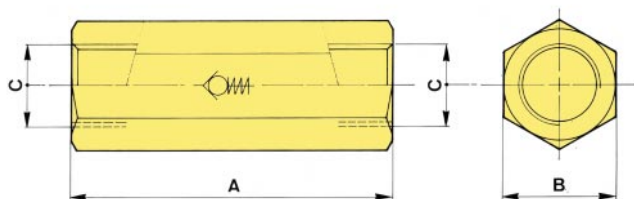



CODE CODICE	C*	Max flow Max flusso	Max pressure Max pressione		A		B	
		l/min	bar	psi	mm	in	mm	in
CV-04	1/4"	13	350	5000	60	2,36	19	0,75
CV-06	3/8"	25	350	5000	70	2,76	24	0,94
CV-08	1/2"	40	350	5000	76	2,99	30	1,18
CV-12	3/4"	60	300	4300	92	3,62	36	1,42
CV-16	1"	90	250	3600	108	4,25	45	1,77
CV-20	1.1/4"	160	250	3600	127	5,00	55	2,17
CV-24	1.1/2"	210	250	3600	142	5,59	65	2,56

* Standard thread is BSP (GAS). Available threads on request : metric, NPTF, SAE and UNF.

Filettature standard BSP (GAS) disponibili a richiesta filettature metriche, NPTF, SAE e UNF.

SERIES VPCC SERIE VPCC

BURST HOSE VALVE VALVOLA DI SICUREZZA PER TUBAZIONI

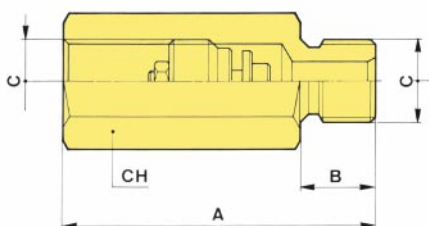



CODE CODICE	C*	B		CH		A	
		mm	in	mm	in	mm	in
VPCC-04	1/4"	13,00	0,51	19	0,75	53	2,09
VPCC-06	3/8"	13,00	0,51	22	0,87	55	2,17
VPCC-08	1/2"	14,00	0,55	27	1,06	64	2,52
VPCC-12	3/4"	15,00	0,59	36	1,42	67	2,64

* Standard thread is BSP (GAS). Available threads on request : metric, NPTF, SAE and UNF.

Filettature standard BSP (GAS) disponibili a richiesta filettature metriche, NPTF, SAE e UNF.

SERIES CVP SERIE CVP

BURST HOSE CARTRIDGE VALVE VALVOLA DI SICUREZZA A CARTUCCIA



CODE CODICE	A*	B		C	
		mm	in	mm	in
CVP-04	1/4"	19	0,75	8	0,31
CVP-06	3/8"	23	0,91	10,5	0,41
CVP-08	1/2"	29	1,14	13	0,51
CVP-12	3/4"	34	1,34	18	0,71

* Standard thread is BSP (GAS).



Available threads on request : metric, NPTF, SAE and UNF.

Filettature standard BSP (GAS).

disponibili a richiesta filettature metriche, NPTF, SAE e UNF.

SERIES DPC SERIE DPC

**DOUBLE PILOT OPERATED CHECK
VALVE
VALVOLA DI BLOCCO DOPPIO
PILOTA**

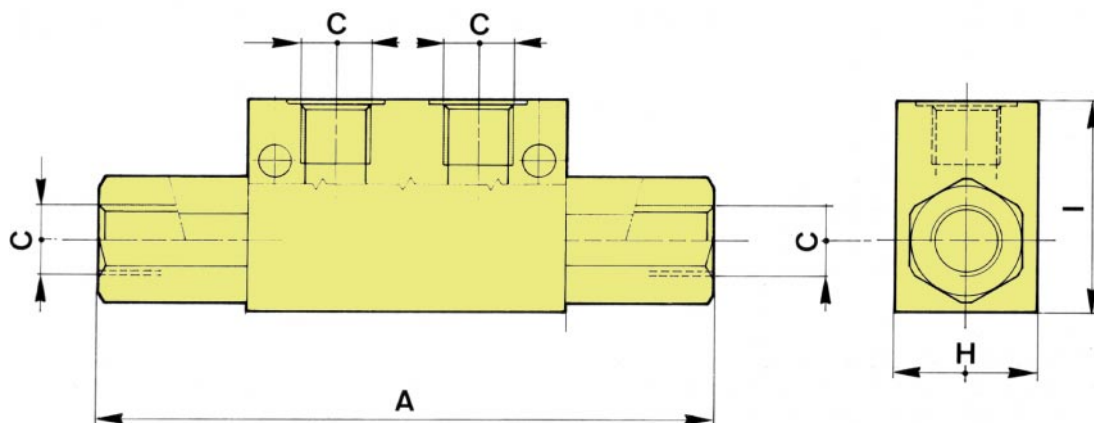


CODE CODICE	C*	Max flow Max flusso	Max pressure Max pressione		A		I		H	
		l/min	bar	psi	mm	in	mm	in	mm	in
DPC-04	1/4"	12	350	5000	126	4,96	45	1,77	30	1,18
DPCX-06	3/8"	20	350	5000	126	4,96	45	1,77	30	1,18
DPC-06	3/8"	30	350	5000	158	6,22	60	2,36	40	1,57
DPC-08	1/2"	45	350	5000	174	6,85	60	2,36	40	1,57
DPC-12	3/4"	85	300	4350	212	8,35	70	2,76	50	1,97

* Standard thread is BSP (GAS). Available threads on request : metric, NPTF, SAE and UNF.

Filettature standard BSP (GAS) disponibili a richiesta filettature metriche, NPTF, SAE e UNF.

SERIES VSU SERIE VSU

TROTTLE VALVE VALVOLA DI STROZZAMENTO

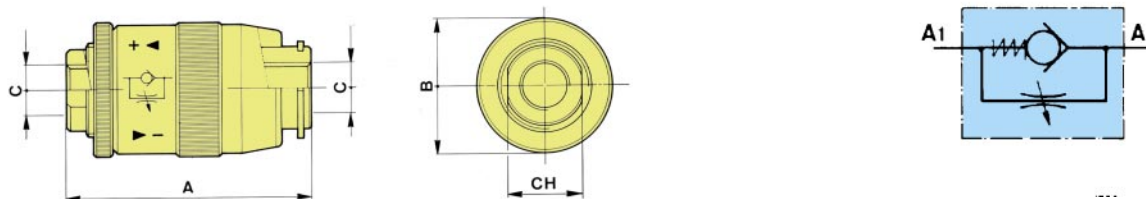


CODE CODICE	C*	Max flow Max flusso	Max pressure Max pressione		A		B		CH	
		l/min	bar	psi	mm	in	mm	in	mm	in
VSU-04	1/4"	12	350	5000	62	2,44	34	1,34	19	0,75
VSU-06	3/8"	30	350	5000	72	2,83	40	1,57	24	0,94
VSU-08	1/2"	45	350	5000	80	3,15	46	1,81	30	1,18
VSU-12	3/4"	85	300	4350	100	3,94	54	2,13	36	1,42
VSU-16	1"	100	300	4350	115	4,53	66	2,60	41	1,61
VSU-20	1.1/4"	150	250	3600	135	5,31	82	3,23	55	2,17
VSU-24	1.1/2"	220	250	3600	150	5,91	93	3,66	60	2,36

* Standard thread is BSP (GAS). Available threads on request : metric, NPTF, SAE and UNF.

Filettature standard BSP (GAS) disponibili a richiesta filettature metriche, NPTF, SAE e UNF.

SERIES VRX SERIE VRX

UNI-DIRECTIONAL FLOW REGULATOR REGOLATORE DI FLUSSO UNIDIREZIONALE

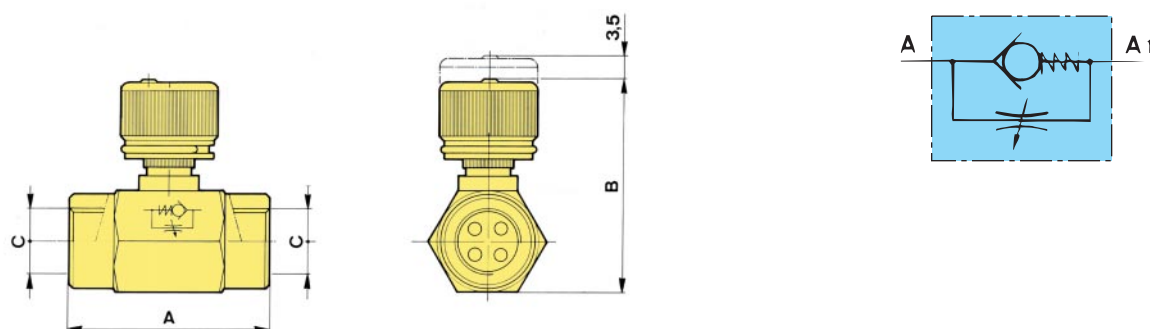



CODE CODICE	C*	Max flow Max flusso	Max pressure Max pressione		A		B	
		l/min	bar	psi	mm	in	mm	in
VRX-04	1/4"	12	300	4350	54	2,13	64	2,52
VRX-06	3/8"	25	300	4350	62	2,44	64	2,52
VRX-08	1/2"	40	280	4000	62	2,44	64	2,52

* Standard thread is BSP (GAS). Available threads on request : metric, NPTF, SAE and UNF.

Filettature standard BSP (GAS) disponibili a richiesta filettature metriche, NPTF, SAE e UNF.

SERIES VRU SERIE VRU

UNI-DIRECTIONAL FLOW REGULATOR REGOLATORE DI FLUSSO UNIDIREZIONALE

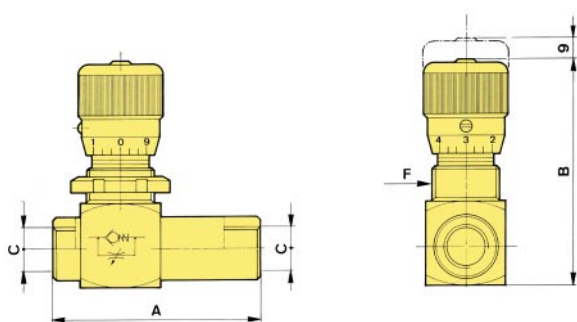



CODE CODICE	C*	Max flow Max flusso	Max pressure Max pressione		A		B		F
		l/min	bar	psi	mm	in	mm	in	
VRU-04	1/4"	12	350	5000	72	2,83	80	3,15	M20 X 1
VRU-06	3/8"	30	350	5000	78	3,07	85	3,35	M25 X 1,5
VRU-08	1/2"	45	350	5000	92	3,62	92	3,62	M30 X 1,5
VRU-12	3/4"	85	300	4350	106	4,17	105	4,13	M35 X 1,5

* Standard thread is BSP (GAS). Available threads on request : metric, NPTF, SAE and UNF.

Filettature standard BSP (GAS) disponibili a richiesta filettature metriche, NPTF, SAE e UNF.

SERIES VRB SERIE VRB

BI-DIRECTIONAL FLOW REGULATOR REGOLATORE DI FLUSSO BIDIREZIONALE

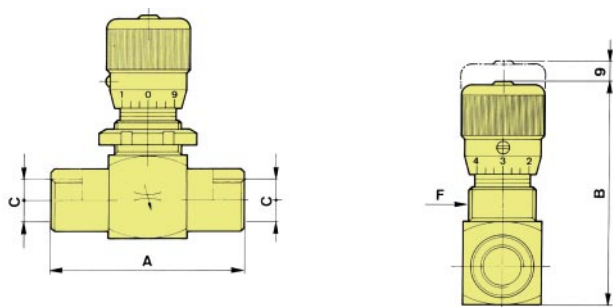

CODE CODICE	C*	Max flow Max flusso	Max pressure Max pressione		A		B		F
		l/min	bar	psi	mm	in	mm	in	
VRB-04	1/4"	12	350	5000	45	1,77	80	3,15	M20 X 1
VRB-06	3/8"	30	350	5000	52	2,05	85	3,35	M25 X 1,5
VRB-08	1/2"	45	350	5000	60	2,36	92	3,62	M30 X 1,5
VRB-12	3/4"	85	300	4350	68	2,68	105	4,13	M35 X 1,5

* Standard thread is BSP (GAS). Available threads on request : metric, NPTF, SAE and UNF.

Filettature standard BSP (GAS) disponibili a richiesta filettature metriche, NPTF, SAE e UNF.

© Intertraco (Italia) S.p.A.

Quick Disconnect Couplings - rev.00 - October 1, 2009

The data reported in this catalogue are not binding. Intertraco (Italia) S.p.A. reserves the right to change specifications without notice.

I dati riportati nella seguente pubblicazione non sono impegnativi. Intertraco (Italia) S.p.A. si riserva di apportare modifiche senza preavviso.

The data reported in this catalogue are not binding. Intertraco (Italia) S.p.A. reserves the right to change specifications without notice.

Die vorliegenden Angaben sind nicht bindend. Intertraco (Italia) S.p.A. behält sich technische Änderungen vor ohne Mitteilung.

Los datos referidos en la presente publicación son indicativos. Intertraco (Italia) S.p.A. se reserva el derecho de modificar las especificaciones sin aviso previo.



intertraco (italia)

Via E. Amaldi 1/A-B
46029 SUZZARA (Mantova) Italy - P.O. Box 7c
Tel. Int. +**0376 / 534262** r.a.
Fax +**0376 / 521722**
www.intertraco.it - e-mail: info@intertraco.it