



The best Return on Investment
Since 1972



S6 ECOLINE/ S6 ECOLINE DC - WORKSHOP CRIMPERS

Due to its narrow, innovative construction, high level of user friendliness, and long service life, the S6 ECOLINE series sets the standard for quality and cost effectiveness. Its compact construction allows ergonomic working. The use of long master dies allows you to crimp 90° Elbows fittings up to 2" with the tried and tested, Greaseless slide bearing technology reducing maintenance costs and increase the product quality.

Large opening travel

Allows crimping of elbow fittings easily, without removal of the dies

Large Pressure Die

Allows crimping of 3" industrial hose

Compact engineered design

Fits easily into any workshop

Slide bearing technology

No greasing improves cleanliness of machine and longer life

Maximum productivity with very low maintenance cost

Flaking cannot stick in grease and mud, no risk of prematurely damaging the crimping head

End product can be used in sanitary applications without cleaning

20% more capability for crimping stronger or more difficult couplings versus our competition's equivalent crimpers

Consistently accurate crimp result

ECOLINE version

Economical models in price, but with the same quality

CE compliant



S6



S6 ECOLINE with TU Rack 18-PB239



UNIFLEX.de
made in Germany


www.uniflex.de



The best Return on Investment
Since 1972



S6 ECOLINE/ S6 ECOLINE DC - WORKSHOP CRIMPERS

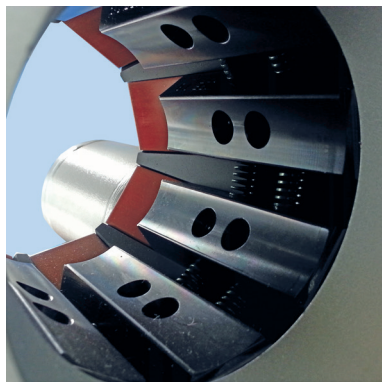

S6 series is fitted with the cleanliness greaseless slide bearing technology.



The S6 series allows to crimp short 90° Elbows with a long drops. Impossible for other conventional machines.



The classic micrometer allows you to easily set the crimping diameter.

Technical data	S6 ECOLINE	S6 ECOLINE DC
Crimp force (kN / Ton)	2000 / 200	
No grease: 20% less friction	ja	
Control	CONTROL A	
SAE R 15 / 4SH* 1 piece	2"	
4SH* 2 piece	2"	
SAE R 15 / 4SP* 2 piece	1½"	
Industry	3"	
90° Elbow	2"	
max. Crimp range	100 mm	
Opening	+ 45 mm	
Opening without dies	147 mm	
Type of dies	239 / 266 L	
Noise level	69 dBA	
Speed(mm/sec.)	3Phase	1Phase
close	4,9	1,3
crimp	2,3	0,6
open	8,2	2,1
Drive	4 kW	1,8 kW
Oil	50 l	4 l
Length(mm)	700	605
Width(mm)	600	505
Height (mm)	735	558
Weight (kg)	248 kg	221 kg
Voltage variants (Other voltages on demand.)		
S6.3 ECOLINE_00	380-420 Volt 50Hz 3Ph	
S6.3 ECOLINE_20_21	220-240 Volt 50/60Hz 3Ph	
S6.3 ECOLINE_22	220-230 Volt 60Hz 1Ph	
S6.3 ECOLINE_23	220-230 Volt 50Hz 1Ph	
S6.2 ECOLINE_90	12 Volt DC	
S6.2 ECOLINE_91	24 Volt DC	
Accessories		
TA	Depth stop	
QDS 239 C	Typ 239 (12 set) die storage	
QDS 239 R	Typ 239 (9 set) die storage	
QDS 239 B	Typ 239 (9 set) die storage	
QDC 239.5	Quick change tool for dies	
SHS	Mirror	
PS	Foot pedal	
TU Rack 18-PB239	Workbench with die storage (18 st)	
TU	Workbench	
Package		
Crimper+ PB Ø 17, 20, 24, 28, 32, 40, 44, 50, 57,71 + 266.239L		

Dies at a glance:

Ø	6,8	9	12	14	16	17	19	20	22	24	26	28	32	36	40	44	47	50	54	57	62	67	71	74	78	84	86	92
PB239(mm)	50	50	50	50	65	65	65	65	65	65	65	80	80	80	80	80	100	100	100	100	100							
PB266(mm)																				110	110	110	110	110	110	110	110	110

* Abhängig von der Armatur
** Abhängig vom Modell